

M Series Upgrade to Mirage Instruction Sheet


INTRODUCTION:

These instructions explain how to upgrade from M Series projector models to Mirage projector models.

Table 1 - M Series Models capable of upgrading to Mirage versions

M Series Model		Upgrade Kit		Converted Mirage	
Part Number	Description	Part Number	Description	Part Number	Description
118-014106-01	DS+6K-M	118-117100-01	DS+6K-M to Mirage	118-054100-01	Mirage DS+6K-M
118-013105-01 118-023106-01	DS+10K-M Roadster S+10K-M	118-118101-01	DS+10K-M to Mirage	118-053109-01	Mirage DS+10K-M
118-012104-01	HD6K-M	118-119102-01	HD6K-M to Mirage	118-052108-01	Mirage HD6K-M
118-011103-01 118-021104-01	HD10K-M Roadster HD10K-M	118-120104-01	HD10K-M to Mirage	118-051107-01	Mirage HD10K-M
118-016108-01	WU7K-M	118-121105-01	WU7K-M to Mirage	118-056102-01	Mirage WU7K-M
118-015107-01 118-025108-01	WU12K-M Roadster WU12K-M	118-122106-01	WU12K-M to Mirage	118-055101-01	Mirage WU12K-M

Table 2 - Overview of the upgrade procedure

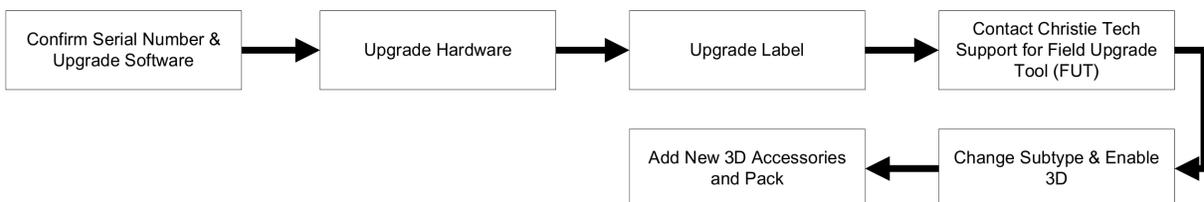

UPGRADE PROCEDURE

1. Before proceeding, confirm the sales order which includes the serial number of the projector.
2. Power up the projector, ensure the software is version 2.0.1 or greater. If necessary, install the latest software.
3. Hardware required per projector:

<input type="checkbox"/>	Qty. 1. DDIC	001-100752-XX-Dual DVI Input Option Card
<input type="checkbox"/>	Qty. 1. DIPC	001-100470-XX-Dual Image Processor
<input type="checkbox"/>	Qty. 1. Label ID Mirage	See Table 3, below
<input type="checkbox"/>	Qty. 1. Assy Harness 3 D Stereo Sync	001-100218-XX
<input type="checkbox"/>	Qty.1. Assy Tech Doc Mirage M Series	000-102125-XX

Table 3 - Product ID Label

Converted Mirage		Product ID Label	
Part Number	Description	Part Number	Description
118-054100-01	Mirage DS+6K-M	013-101662-01	Mirage DS+6K-M
118-053109-01	Mirage DS+10K-M	013-101661-01	Mirage DS+10K-M
118-052108-01	Mirage HD6K-M	013-101660-01	Mirage HD6K-M
118-051107-01	Mirage HD+10K-M	013-101659-01	Mirage HD10K-M
118-056102-01	Mirage WU7K-M	013-101497-01	Mirage WU7K-M
118-055101-01	Mirage WU12K-M	013-101663-01	Mirage WU12K-M

4. Remove the SIPC and install the DIPC.
5. Install the DDIC. **NOTE:** *Mirage projectors have QTY. 2. DDIC input cards, ensure each projector provides a QTY. 1 DDIC installed.*
6. For models with MYNF, the MYNF menu controls are unavailable if the software is version 2.0.1. The MYNF can be controlled via serial command.
7. Contact Christie Tech-Support (1-800-221-8025) or tech-support@christiedigital.com for FUT to complete the upgrade.
8. Retain the SIPC at the Service Depot.
9. Return extra customer input cards to the customer.
10. Repack the unit using the customer’s packaging. **NOTE:** *Ensure to add the 3D Sync Cable and the Mirage User Manual.*
11. Return to the customer.