

Christie Vive Audio

LS Series

LS2S line source surround loudspeaker




Specifications	Christie LS2S
System type	• Two-way, passive, ported enclosure
Driver components	• HF: 3" high output ribbon driver with Kapton® diaphragm and Neodymium magnets • LF: 8" paper/Kevlar composite cone driver with 51mm diameter voice coil
Crossover	• 2-way, passive @ 2.2kHz
Frequency response¹	• 70Hz-20kHz @ -6dB
Maximum SPL²	• 116.5dB continuous, 128dB peak
System coverage³	• 100° horizontal dispersion • 50° vertical dispersion
Sensitivity¹, 1W/1m	• 94dB
Power handling capacity²	• 175W continuous, 300W (IEC) short term
Recommended amplifier power	• 200-300W @ 8 ohms
Rated impedance	• 8 ohms
Input connectors	• Screw terminal barrier strip
Enclosure	• Polymer composite enclosure with extensive structural reinforcements • Ported enclosure • Acoustically transparent fabric grille
Mounting options	• Wall mounted using 4 x M6 points on rear
Accessories	• 145-179108-01: BKTW-LSXS - Wall tilt bracket for LSxS surround loudspeakers (optional) • 145-108100-XX Christie S115 subwoofer (for optional bass management) • 145-103105-XX Christie S215 subwoofer (for optional bass management) • 111-694201-XX: Allen Products MM-017 for wall mounting (optional)
Dimensions	• (LxWxH) 9.6 x 10.24 x 17.7" (244 x 260 x 450mm)
Net weight	• 15.4lbs (7kg)
Warranty	• Limited 5-year warranty

¹ Measured at 2m on tweeter axis in simulated free field conditions. Near field measurements were used for low-frequency data. Sensitivity is calculated based on measured SPL response averaged in 200Hz-5kHz range.


² IEC refers to IEC 60268-5 standard. Max SPL calculated based on sensitivity and power handling. IEC short-term power tested using IEC pink noise with 9dB crest factor. The crest factor was specifically increased to reflect real-life parameters of digital cinema sound tracks. Maximum peak SPL calculated using peak voltage during IEC short-term power test. Continuous power handling tested using IEC60268-1 noise signal for duration of 2 hours.

³ Averaged in 500Hz-12kHz range, at -6dB.


Top view



Side view

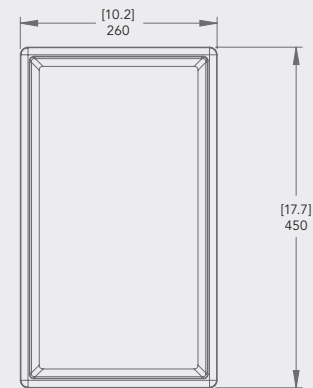

Front view

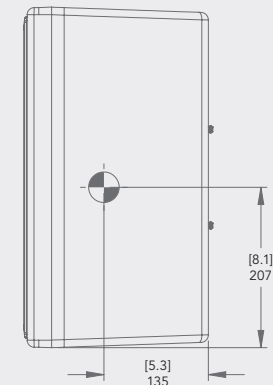

United Kingdom
Branch & EMEA
Head Office
ViewPoint
200 Ashville Way
Wokingham
Berkshire, U.K.
RG41 2PL
PH: +44 (0) 118 977 8000

Middle East
Light Industrial Unit (LIU-17)
Nad Al Shibba
Sheikh Mohammed Bin Zayed Road
Dubai Silicon Oasis
PO Box: 293762
Dubai - U.A.E
PH: +971 (0) 4 503 6800

Africa
Unit C3
Northlands Deco Park
New Market Road
Northriding
Randburg
2164
Johannesburg
Gauteng
South Africa
PH: +27 71 335 8667

Other EMEA offices

Germany
Branch Office
PH: +49 2161 566 200

France
Branch Office
PH: +33 (0) 1 41 21 44 04

Eastern Europe
Representative Office
PH: +36 (0)1 47 48 138

Spain
Branch Office
PH: +34 91 633 9990

Italy
Independent Sales Consultant Office
PH: +39 (0) 2 9902 1161

Russia
Independent Sales Consultant Office
PH: +7 (495) 930-8961



For the most current specification information, please visit www.christieemea.com