



# Christie Vive Audio S Series S215 cinema subwoofer



Front view




Bottom view



Top view



Back view

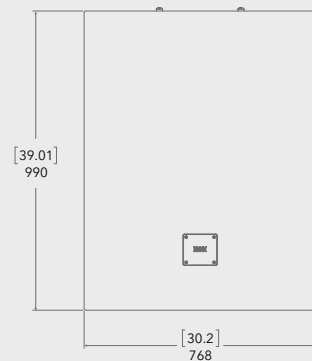

Technical Specifications	Christie S215
<b>System type</b>	• Subwoofer, ported enclosure, with EBS (Extended Bass Shelf) tuning
<b>Driver components</b>	• 2 x 15" low frequency drivers each with dual 4" voice coils and long linear excursion
<b>Crossover</b>	<ul style="list-style-type: none"> <li>• External active electronic crossover/filter</li> <li>• High pass: Butterworth 24dB/octave @ 25Hz</li> <li>• For screen channel or corner surround - Low pass: Bessel 24dB/octave @ 209Hz</li> <li>• For surround bass management - Low pass: L-R 24dB/octave @ 80Hz</li> </ul>
<b>Frequency response<sup>1</sup></b>	• 27-300Hz @ -10dB • 30-250Hz @ -6dB
<b>Maximum SPL<sup>2,3</sup></b>	• 131dB SPL continuous • 143dB SPL peak
<b>Sensitivity<sup>1</sup>, 1W/1m</b>	• 100dB (40-150Hz)
<b>Power handling<sup>2,3</sup></b>	• 1200W (AES) continuous • 2400W (IEC) short term
<b>Recommended amplifier power</b>	• 830-1500W (FTC) @ 4 ohms
<b>Rated impedance</b>	• 4 ohms
<b>Input connectors</b>	• Screw terminal barrier strip
<b>Enclosure</b>	<ul style="list-style-type: none"> <li>• 18mm marine plywood</li> <li>• High cubic displacement</li> <li>• Heavily cross-braced, for minimal enclosure resonance</li> <li>• Ported and tuned to 27Hz with EBS (Extended Bass Shelf)</li> <li>• Built-in fly points</li> </ul>
<b>Mounting</b>	<ul style="list-style-type: none"> <li>• Secured to floor or platform using BKS-SUB Security bracket</li> <li>• Includes a total of 16 x M10 fly points for total versatility</li> <li>• 1 x Allen Products RK-4C Rigging Kit 4 x Cables (111-685201-01) for flying<sup>4</sup></li> </ul>
<b>Accessories (optional)</b>	• Christie BKS-SUB Security bracket (145-110103-01)
<b>Dimensions</b>	• (LxWxH) 20.0 x 30.2 x 39.0" (508 x 768 x 990mm)
<b>Net weight</b>	• 124lbs (56kg)
<b>Warranty</b>	• Limited 5-year warranty

<sup>1</sup> Measured at 2m, ground plane conditions.

<sup>2</sup> AES refers to AES2-2012 standard. Pink noise with 6dB crest factor at 1m. Max continuous SPL calculated based on sensitivity and AES power handling.

<sup>3</sup> IEC refers to IEC 60268-5 standard. IEC pink noise with 9dB peak factor. Maximum peak SPL calculated using peak voltage during IEC short-term power test.

<sup>4</sup> 4 cables required when flown. See User Manual for details.

## Corporate offices

Christie Digital Systems USA, Inc.  
Cypress  
ph: 714 236 8610

Christie Digital Systems Canada Inc.  
Kitchener  
ph: 519 744 8005

## Worldwide offices

Australia  
ph: +61 (0) 7 3624 4888

Brazil  
ph: +55 (11) 2548 4753

China (Beijing)  
ph: +86 10 6561 0240

China (Shanghai)  
ph: +86 21 6278 7708

France  
ph: +33 (0) 1 41 21 44 04

Germany  
ph: +49 2161 664540

India  
ph: +91 (080) 6708 9999

Japan (Tokyo)  
ph: 81 3 3599 7481

Korea (Seoul)  
ph: +82 2 702 1601

Mexico  
ph: +52 55-4744-1790

Republic of South Africa  
ph: +27 11 251 0000

Russian Federation  
and Eastern Europe  
ph: +36 (0) 1 47 48 100

Singapore  
ph: +65 6877 8737

Spain  
ph: +34 91 633 9990

United Arab Emirates  
ph: +971 4 3206688

United Kingdom  
ph: +44 (0) 118 977 8000

United States (Arizona)  
ph: 602 943 5700

United States (New York)  
ph: 646 779 2014

**Independent sales  
consultant offices**

Italy  
ph: +39 (0) 2 9902 1161



ISO 9001  
ISO 14001  
Kitchener Ontario

For the most current specification information, please visit [www.christiedigital.com](http://www.christiedigital.com)



Copyright 2016 Christie Digital Systems USA, Inc. All rights reserved. All brand names and product names are trademarks, registered trademarks or tradenames of their respective holders. Christie Digital Systems Canada Inc.'s management system is registered to ISO 9001 and ISO 14001. Performance specifications are typical. Due to constant research, specifications are subject to change without notice. Printed in Canada on recycled paper. 4246 Mar 16

**CHRISTIE**