


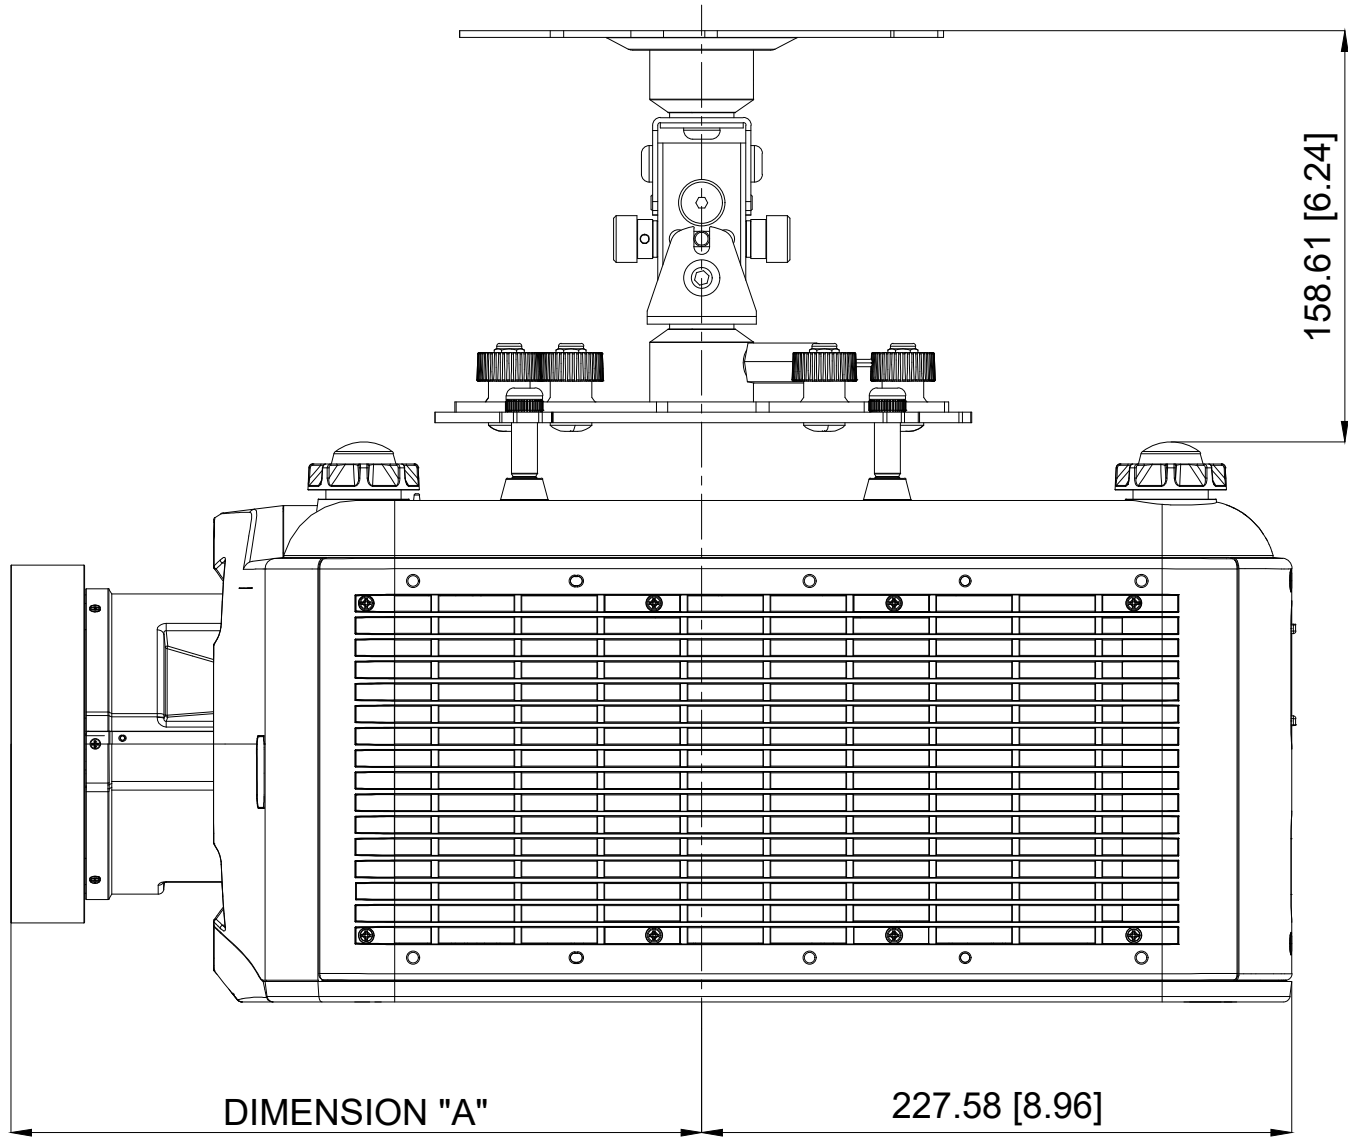
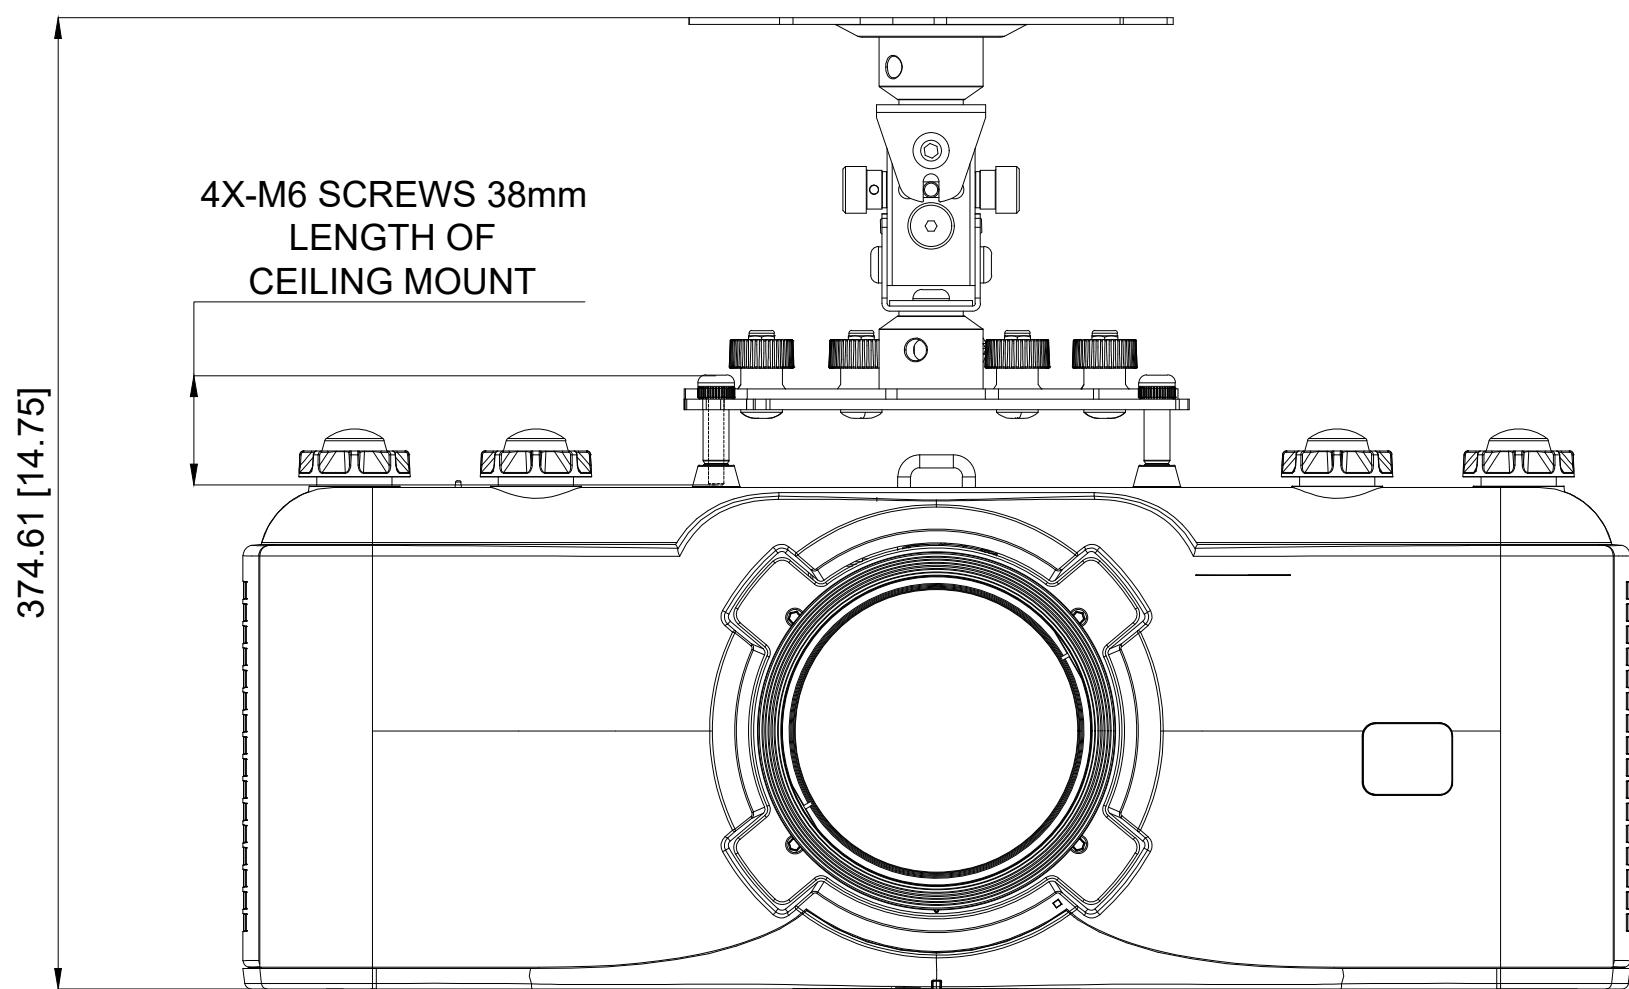


H
G
F
E
D
C
B
A

H
G
F
E
D
C
B
A

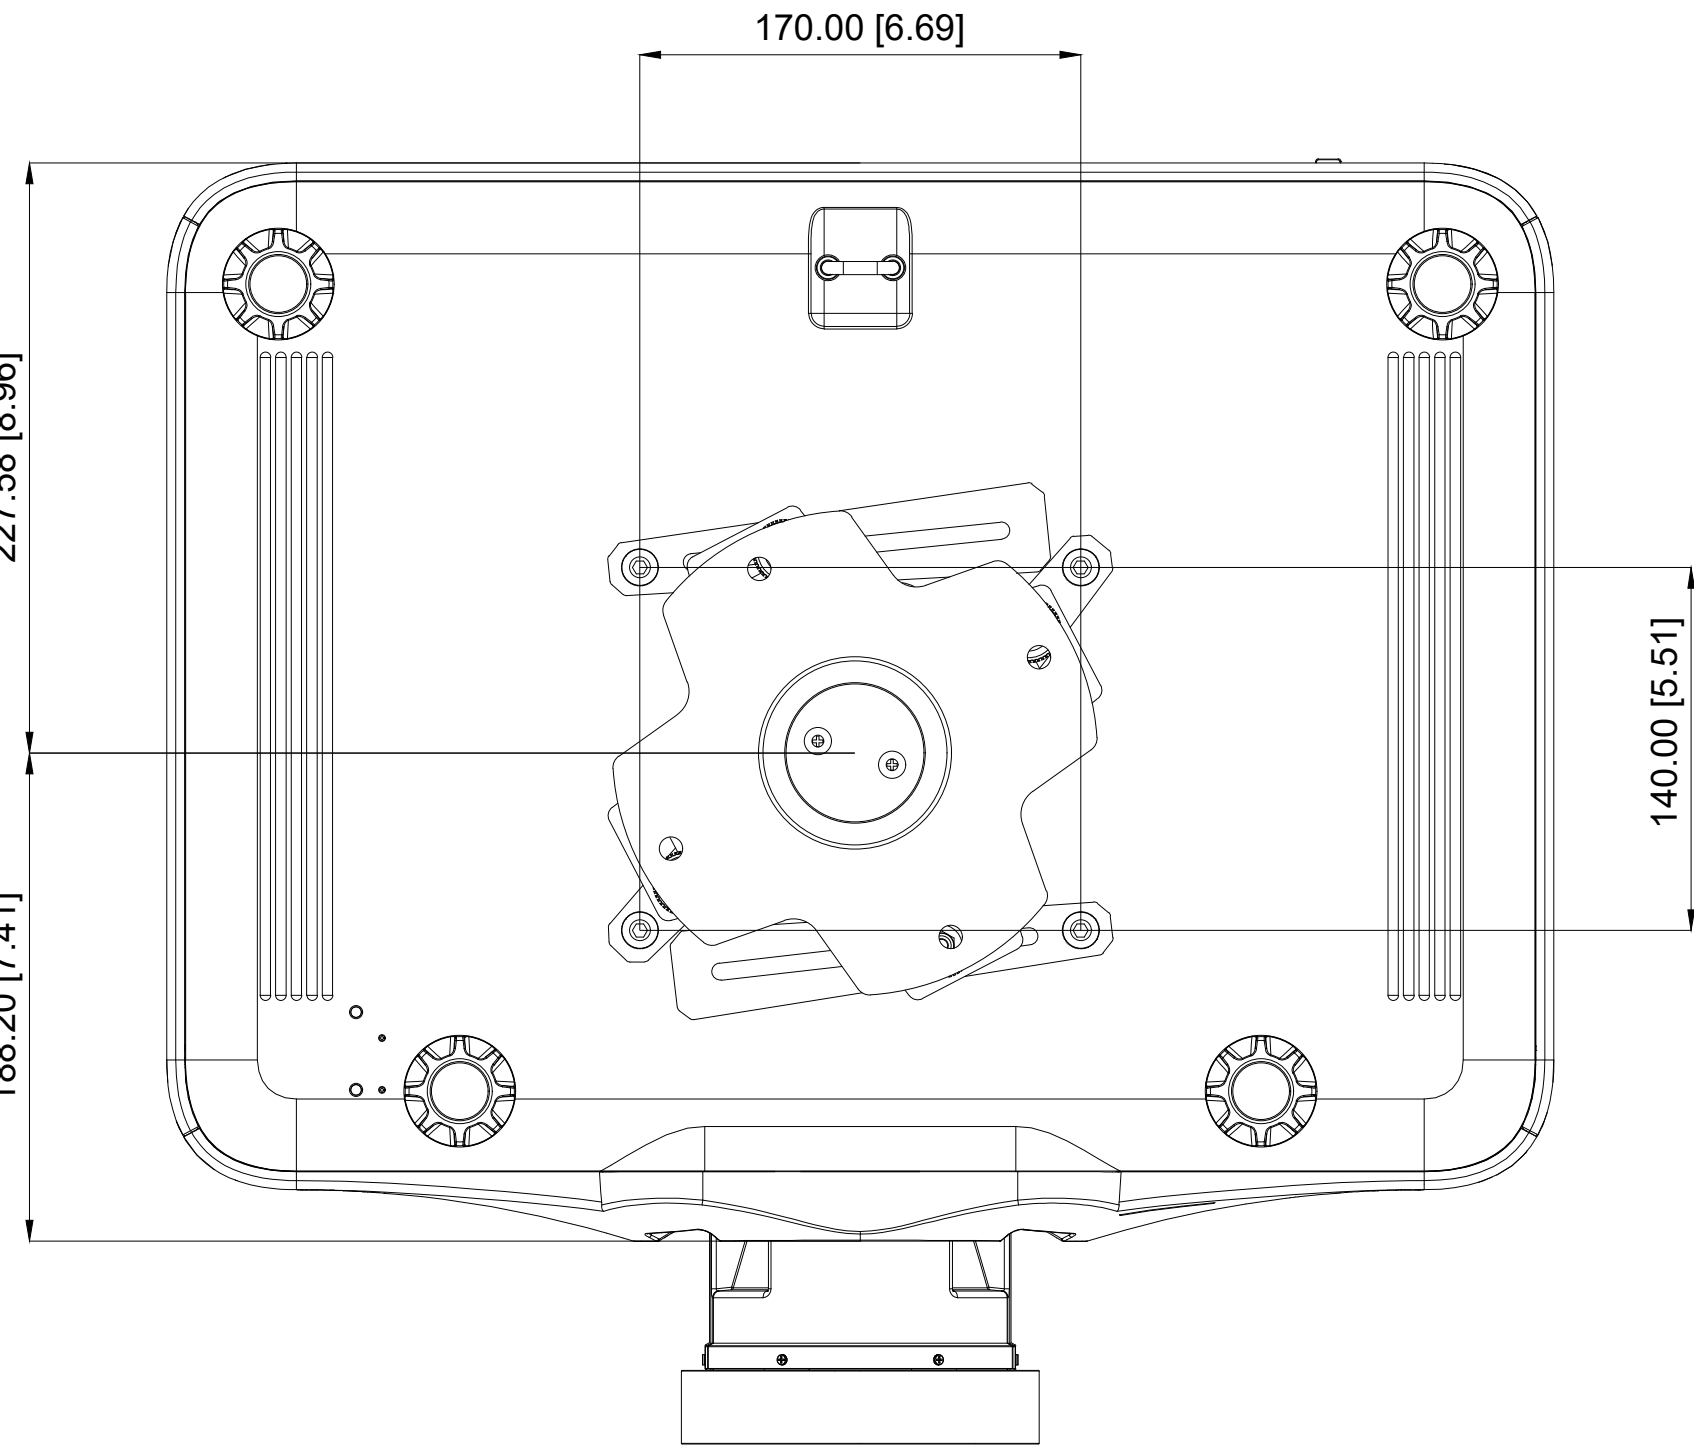

Specification	
Weight capacity	25kg (55lbs)
Maximum Dimensions	240 x 240 x 200 mm (9.45x 9.45 x7.87 inches)
Tilt Angle	±30°
Swivel	360°
Mass	3.0 kg(6.6 lbs)

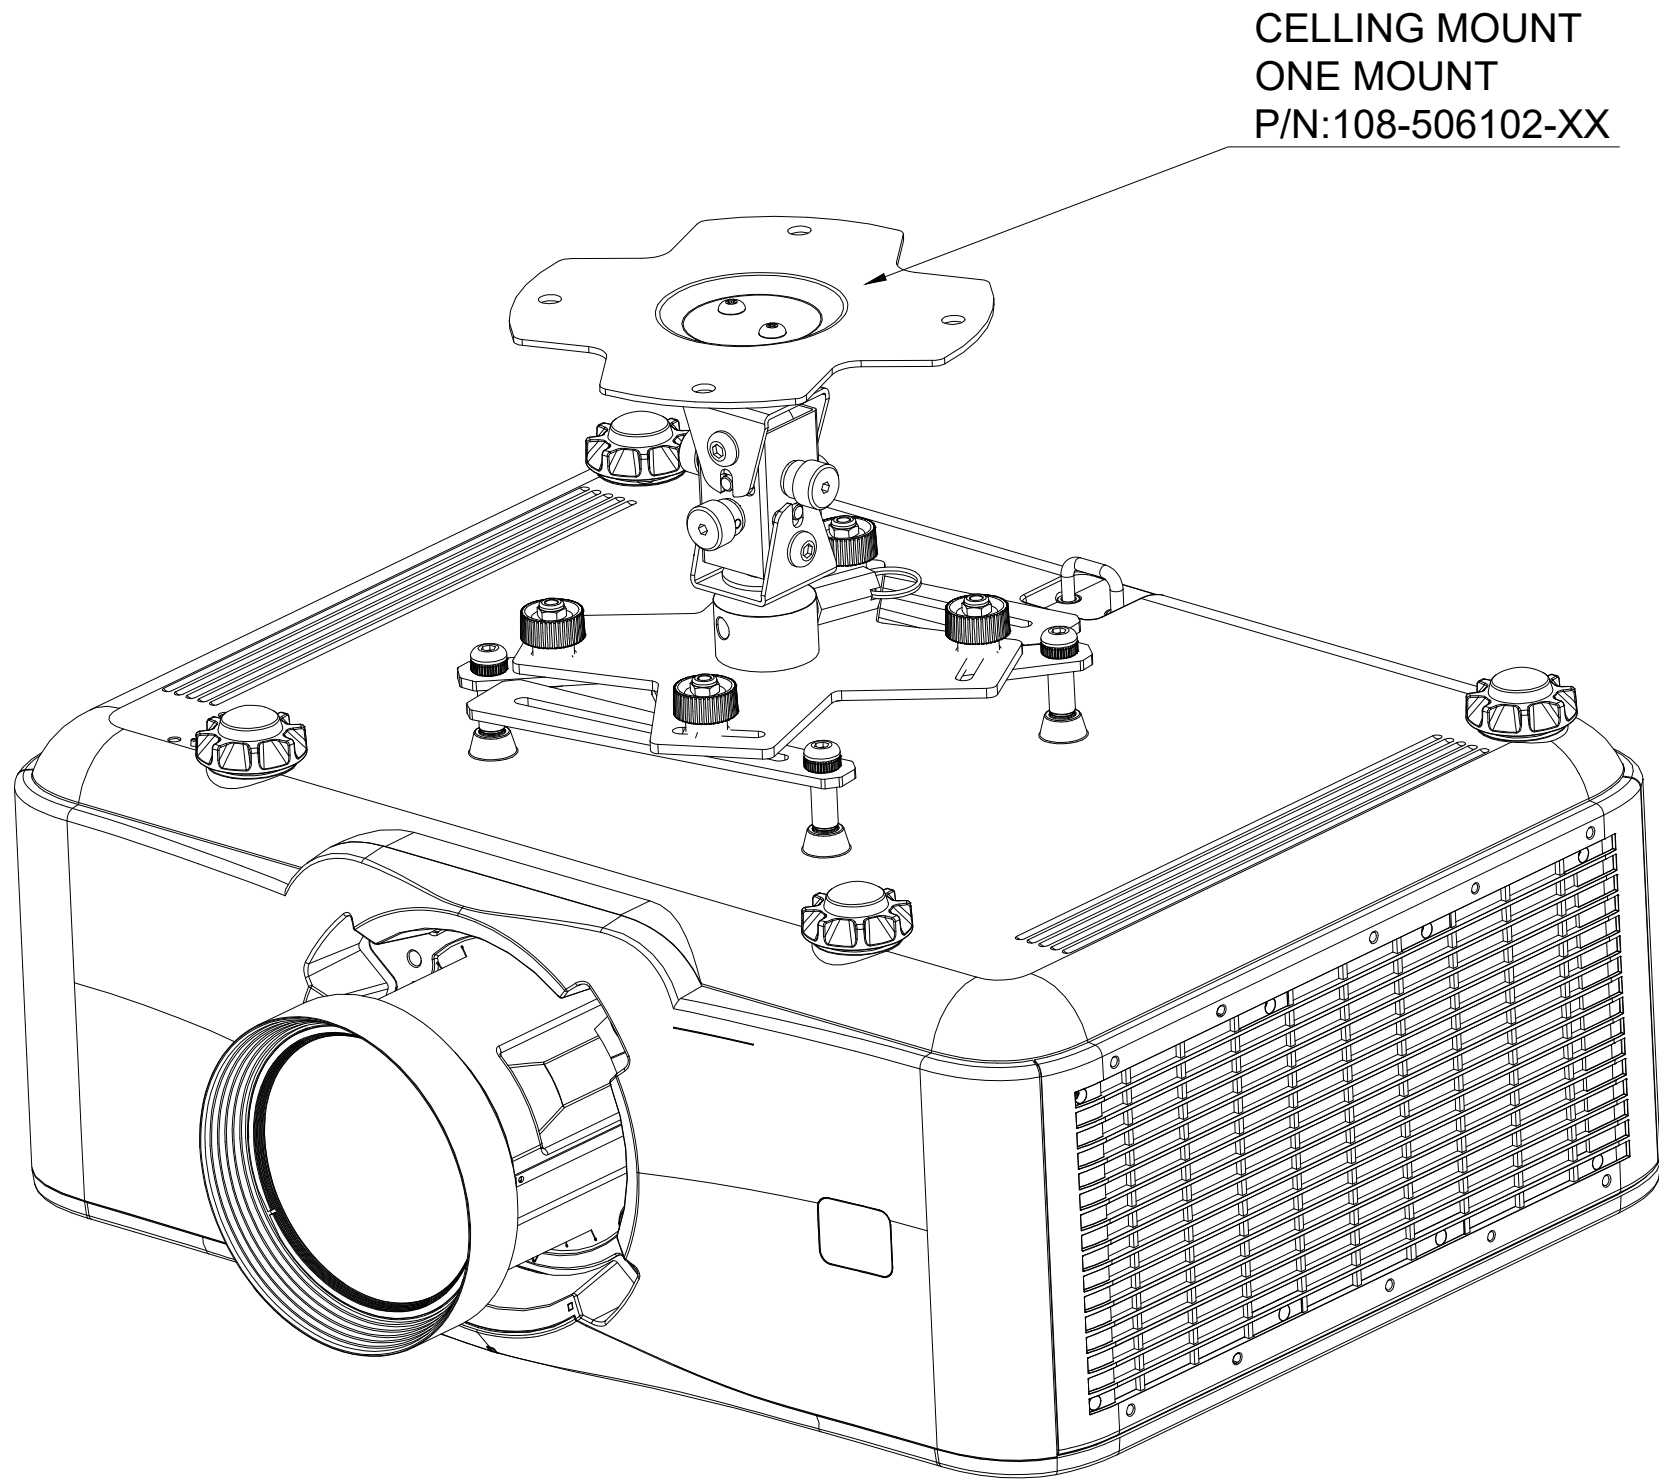

DIMENSION MEASURED TO FACE OF LENS

LENS P/N	UHD	DIMENSION "A"
140-165103-XX	Optional Lens(TR 1.25-2.0)	266.48(10.49")
140-166104-XX	Optional Lens(TR 0.5-0.65)	296.83(11.69")
140-159106-XX	Optional Lens(TR 0.9-1.3)	293.26 (11.55")
140-164102-XX	Optional Lens(TR 0.34-0.37)	385.99 (15.2")
140-144100-XX	Optional Lens(TR 0.78-0.9)	304.56 (11.2")
140-110103-XX	Optional Lens(TR 1.8-2.4)	264.56 (10.42")
140-111104-XX	Optional Lens(TR 2.4-4.8)	298.77 (11.76")
140-116109-XX	Optional Lens(TR 4.8-8.64)	323.74 (12.75")

H

G

F

E

D

C

B

A

H

G

F

E


D

C






B

A

Step 2: Secure the Projector to the Rigging Frame by 4-M6x35 screws

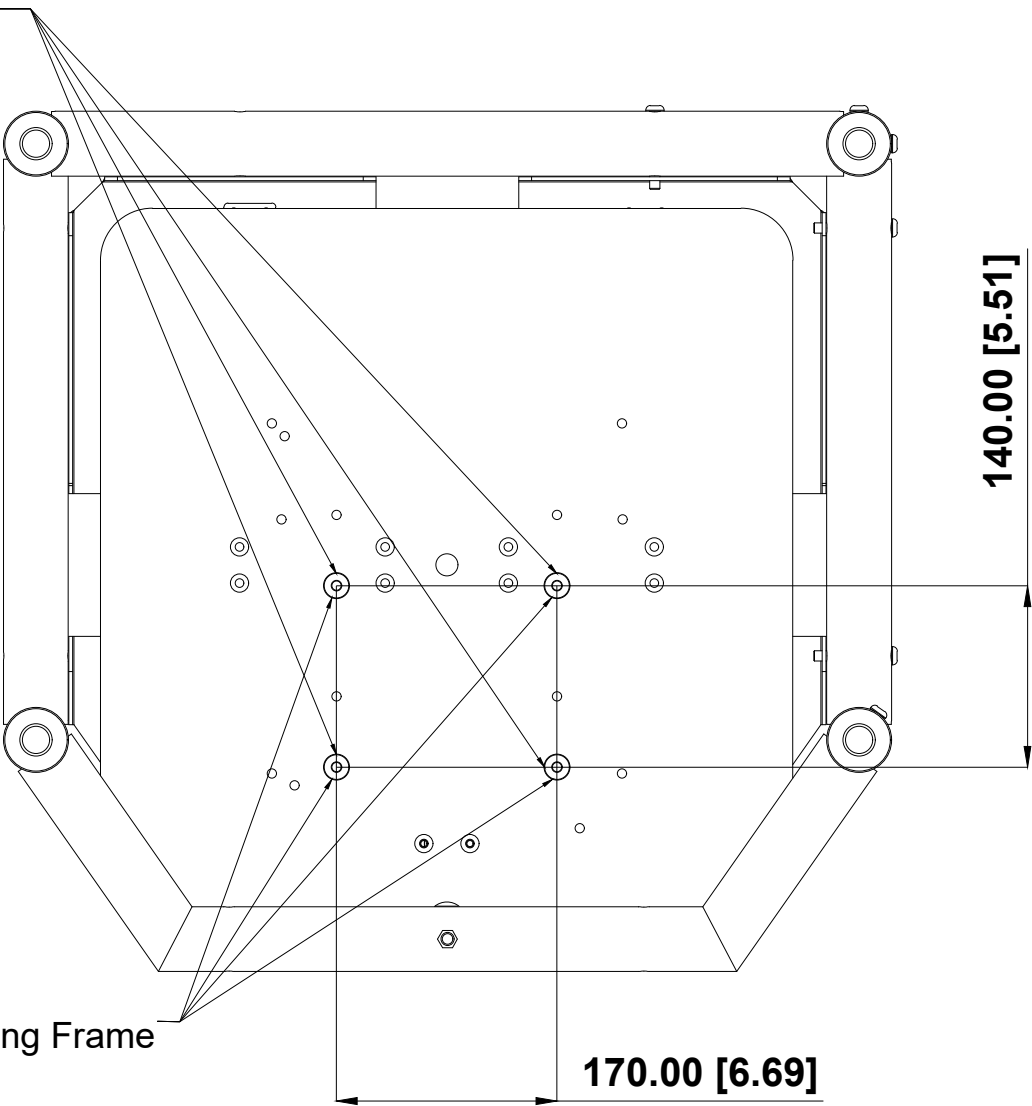


Step 1: Put 4-φ20x15 Spacers on Rigging Frame

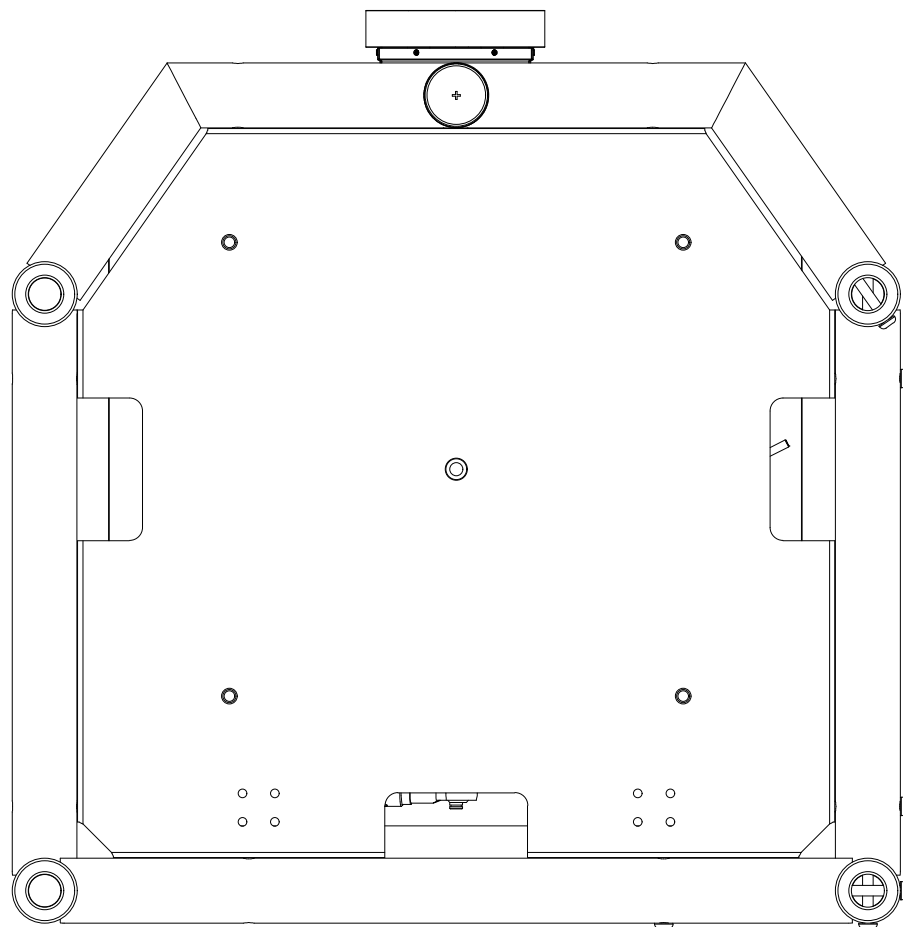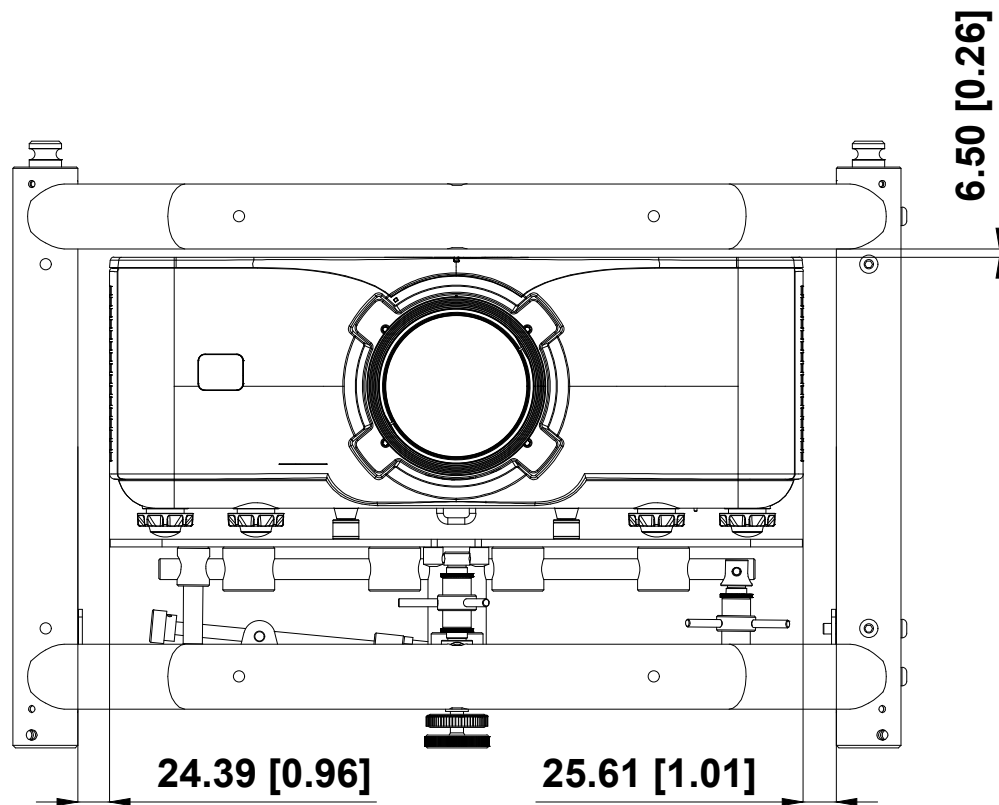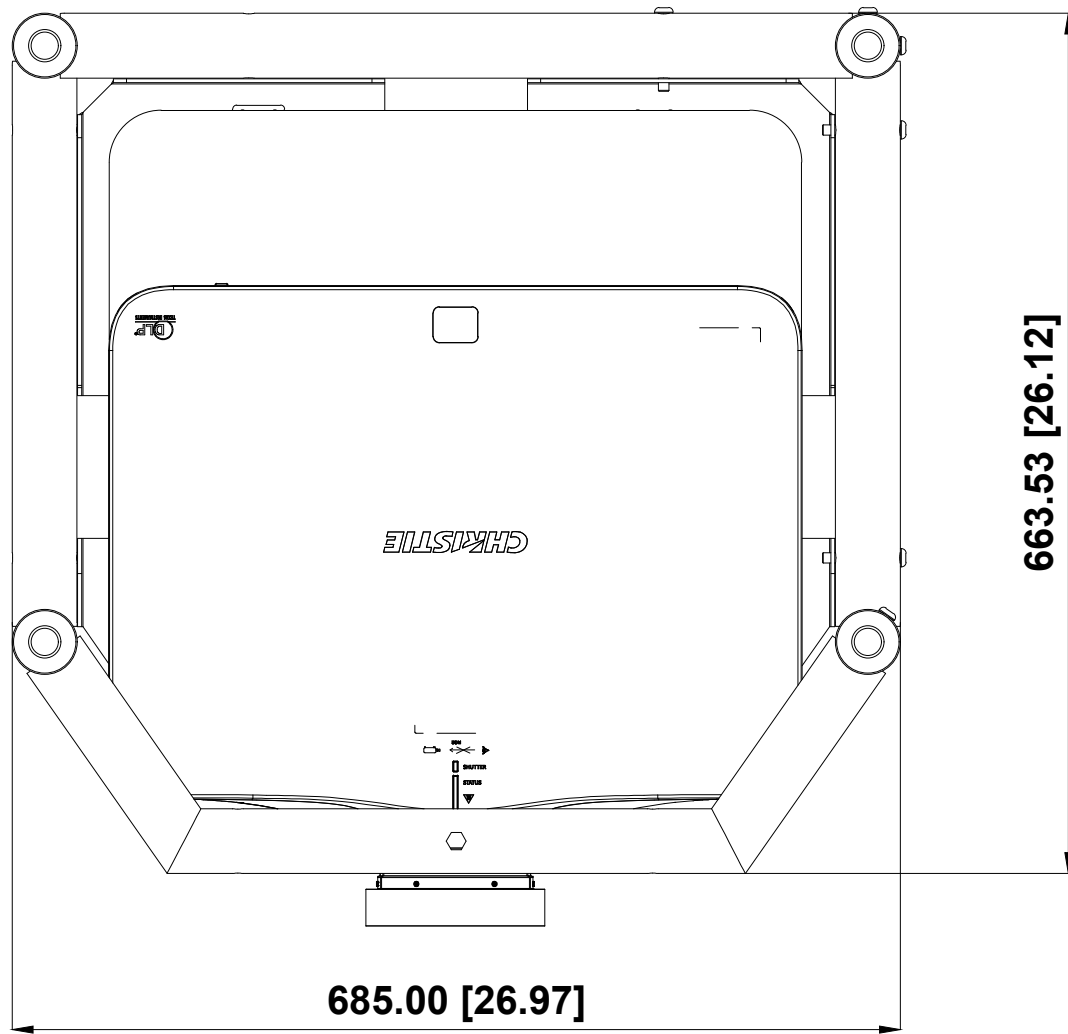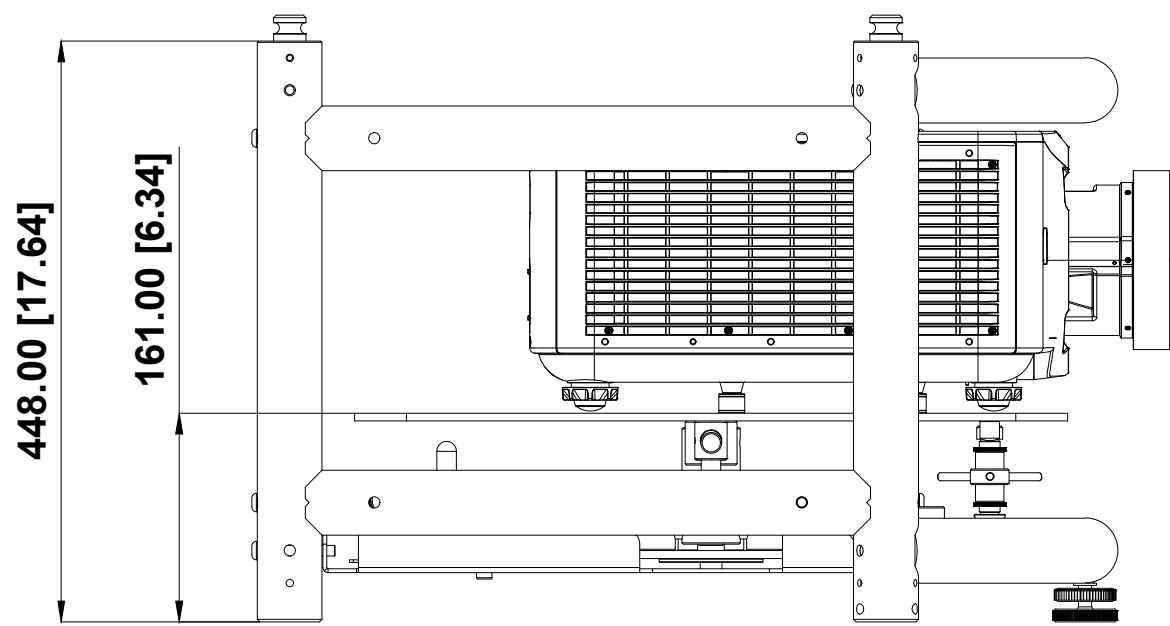

Roll Degrees

Specification	
Weight Capacity	45 kg (99 lbs)
Maximum Dimensions	685 x 665 x 470 mm (27 x 26 x 18.5 inches)
Roll	±2.5°
Pitch	±2.5°
Yaw	±5°
Mass	26 kg (57 lbs)


20x7xH15 mm Aluminum Spacer
P/N: 012-104293-XX





φ20.00 [φ0.79]

φ7.00 [φ0.28]


4-C0.5

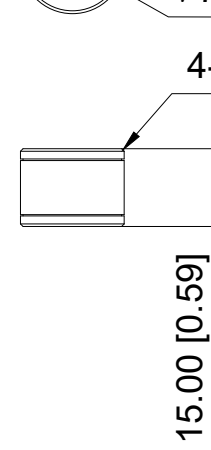

QwikRig Rigging Frame V2
P/N:140-154101-XX

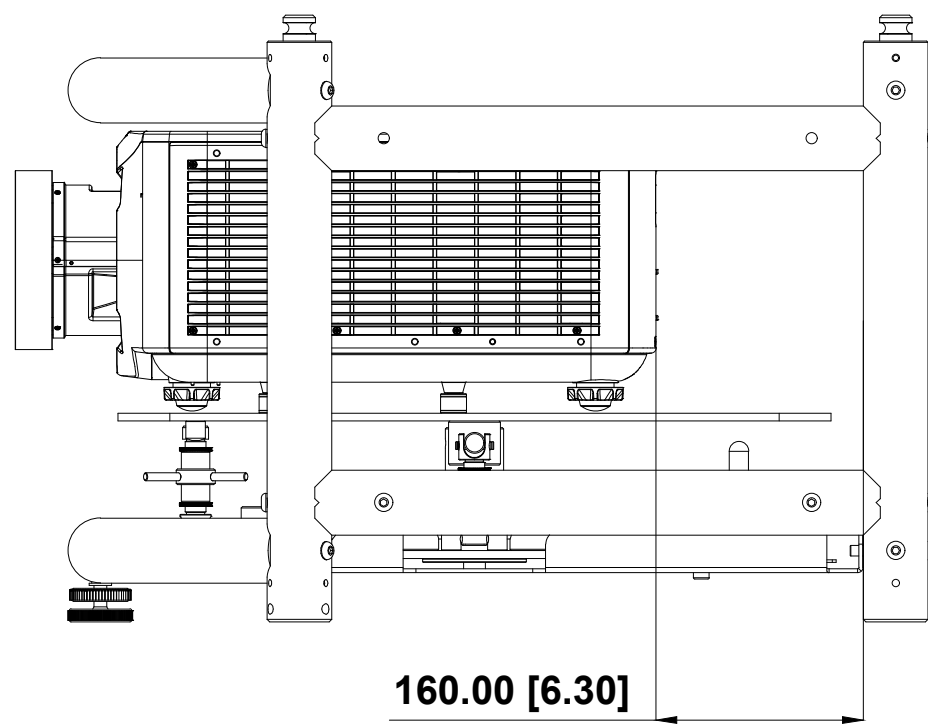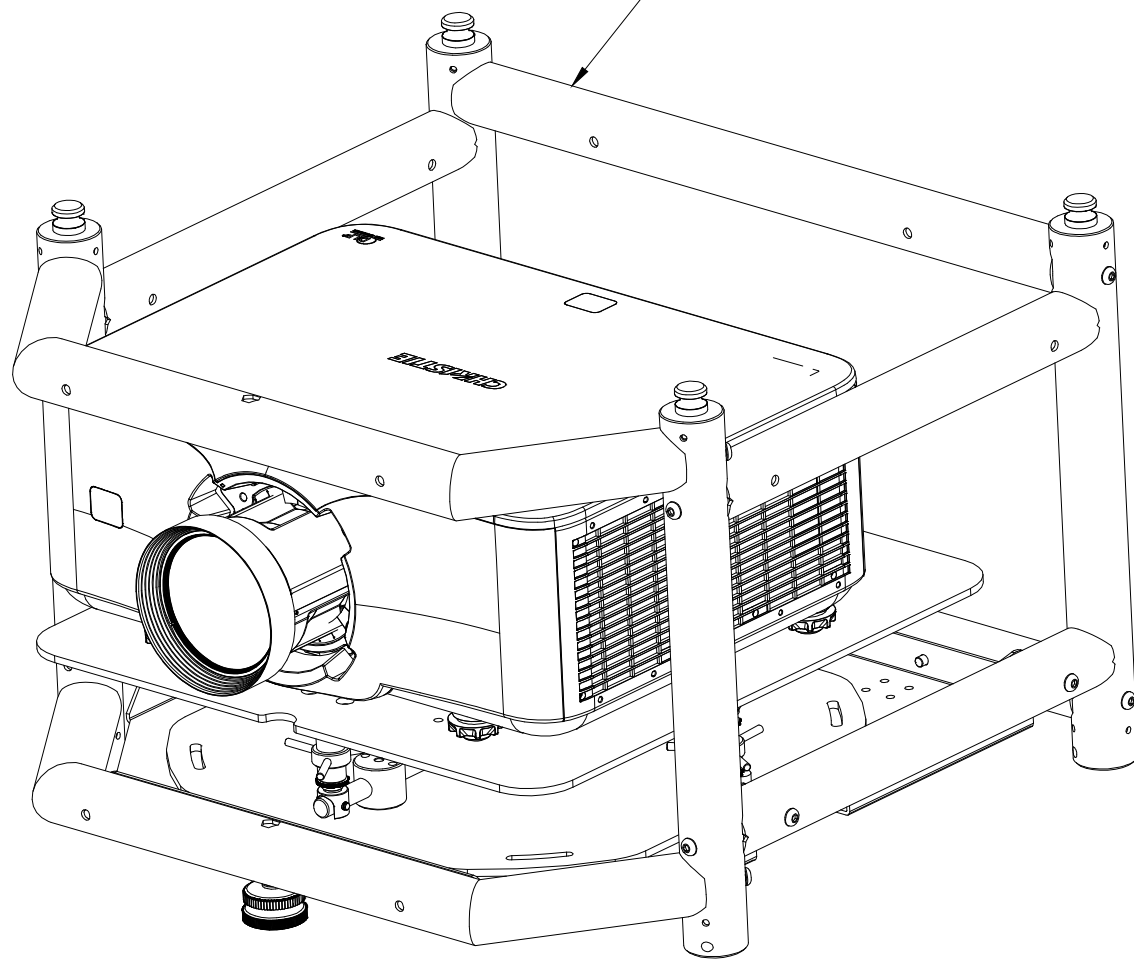

2.5° 2.5°

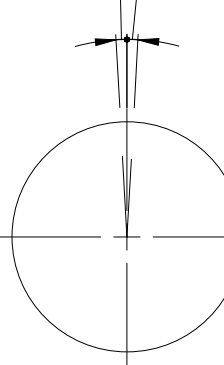


Pitch Degrees







H
G
F
E
D
C
B
A

H
G
F
E
D
C
B
A

Step 2: Secure the Projector to the Rigging Frame by 4-M6x35 screws

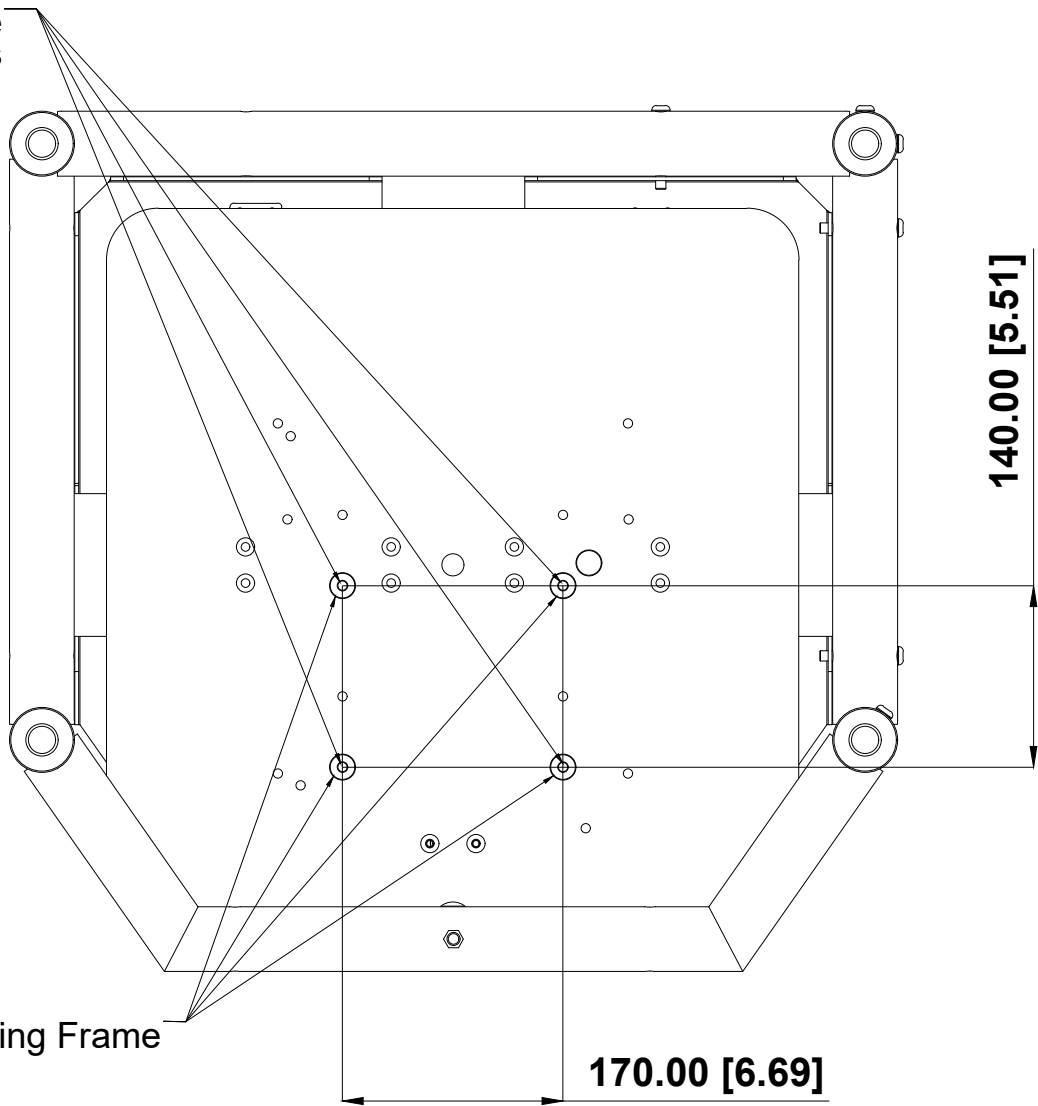


Step 1: Put 4-φ20x15 Spacers on Rigging Frame

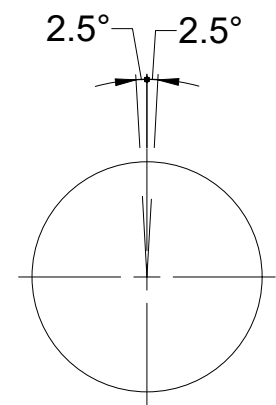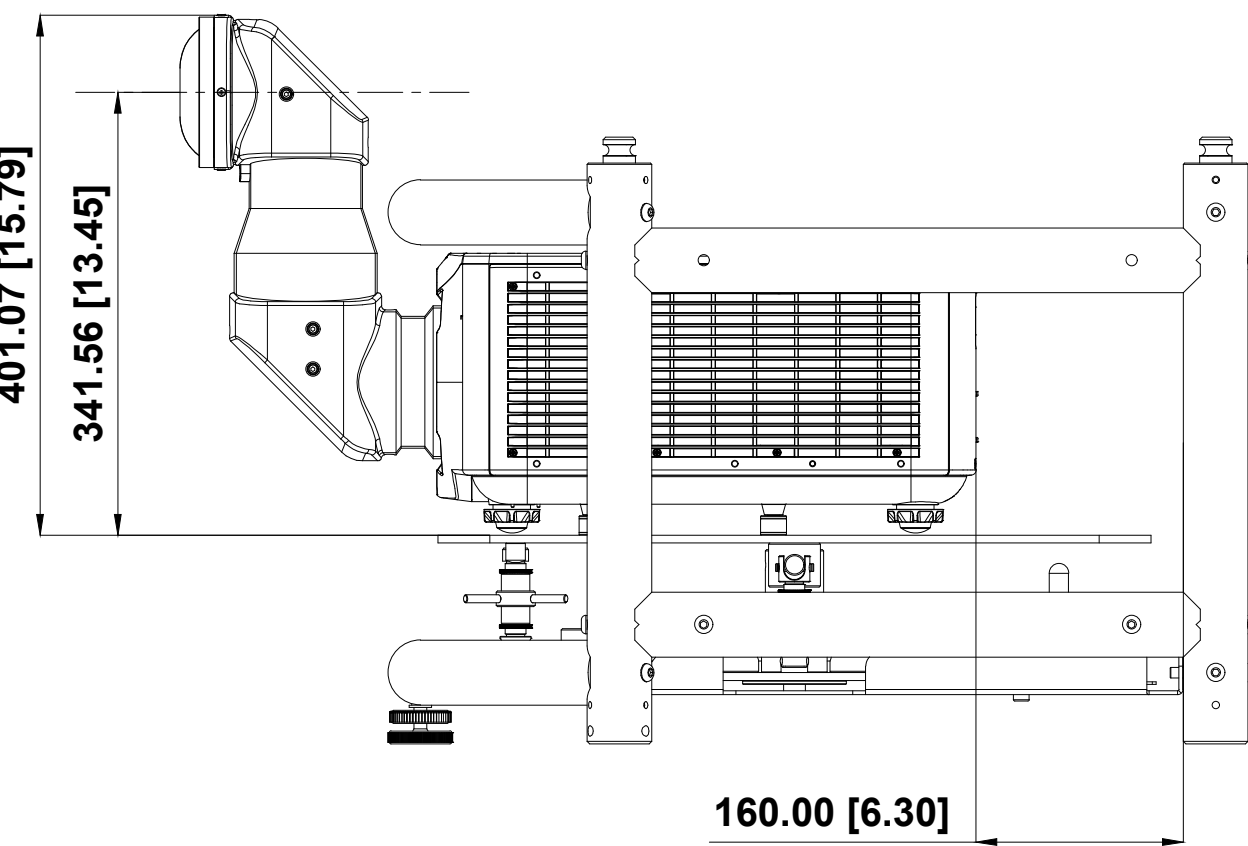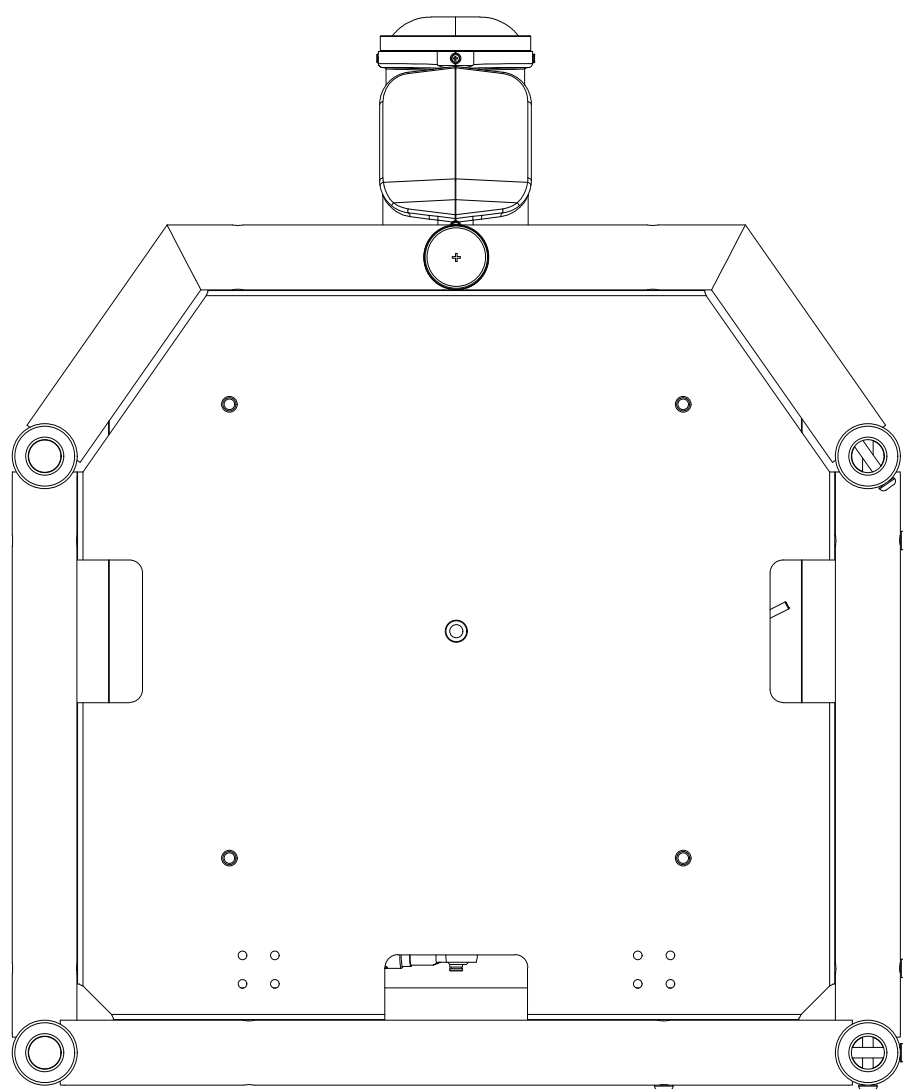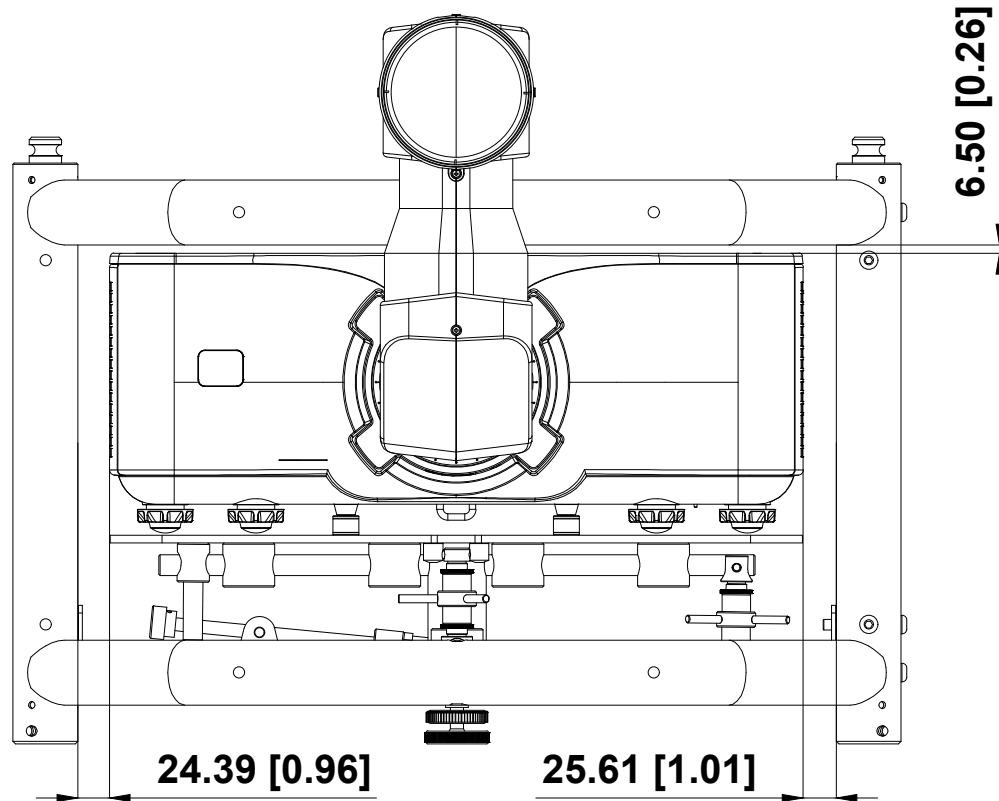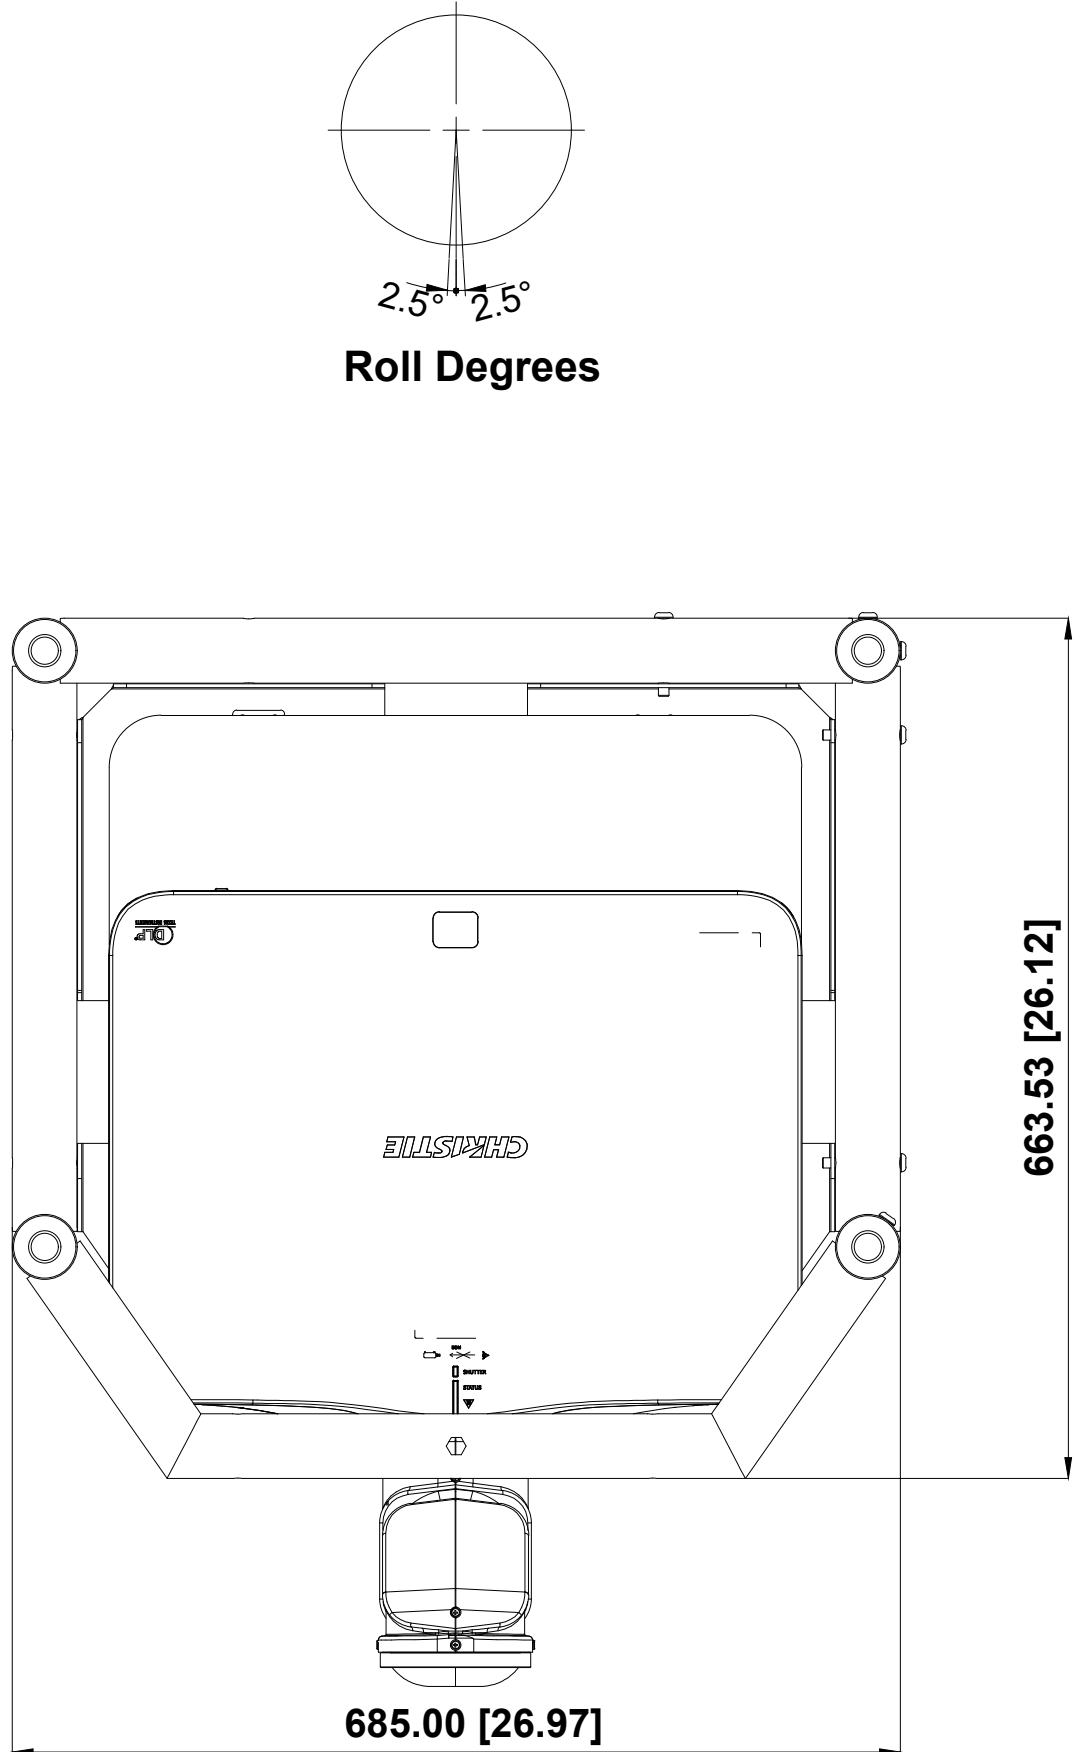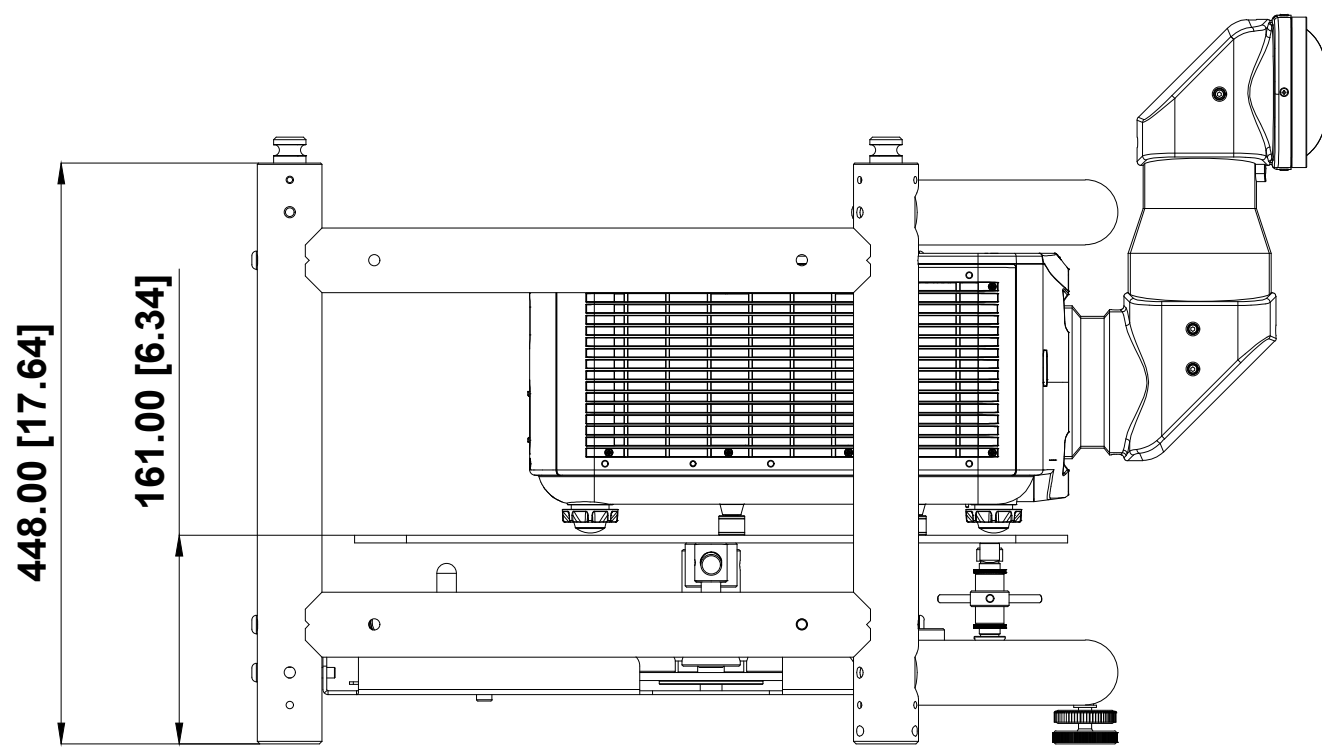


Pitch Degrees

Specification	
Weight Capacity	45 kg (99 lbs)
Maximum Dimensions	685 x 665 x 470 mm (27 x 26 x 18.5 inches)
Roll	±2.5°
Pitch	±2.5°
Yaw	±5°
Mass	26 kg (57 lbs)

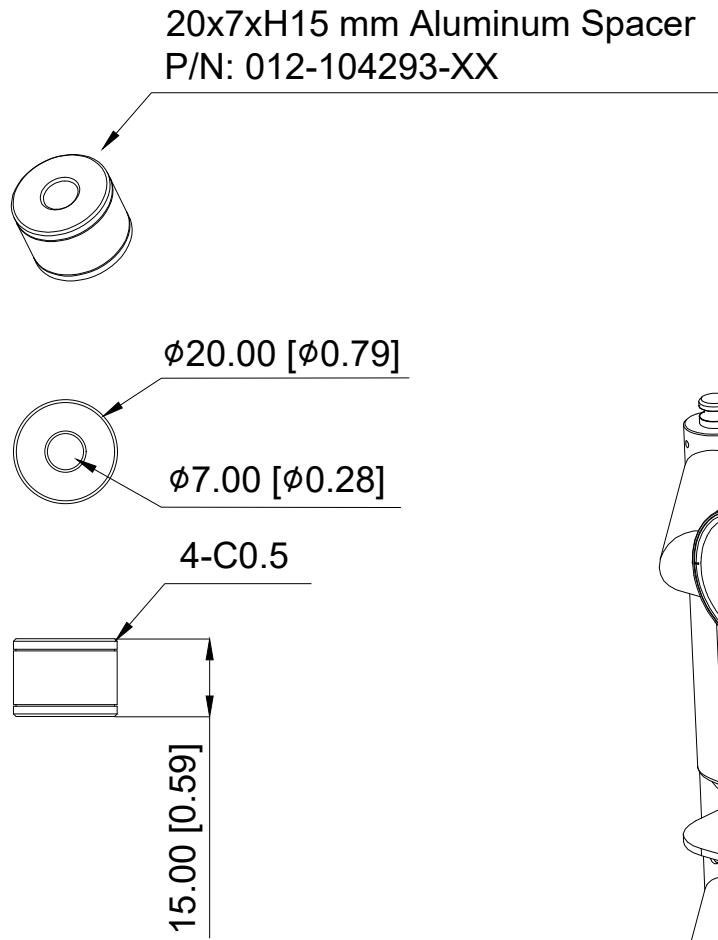

QwikRig Rigging Frame V2
P/N:140-154101-XX

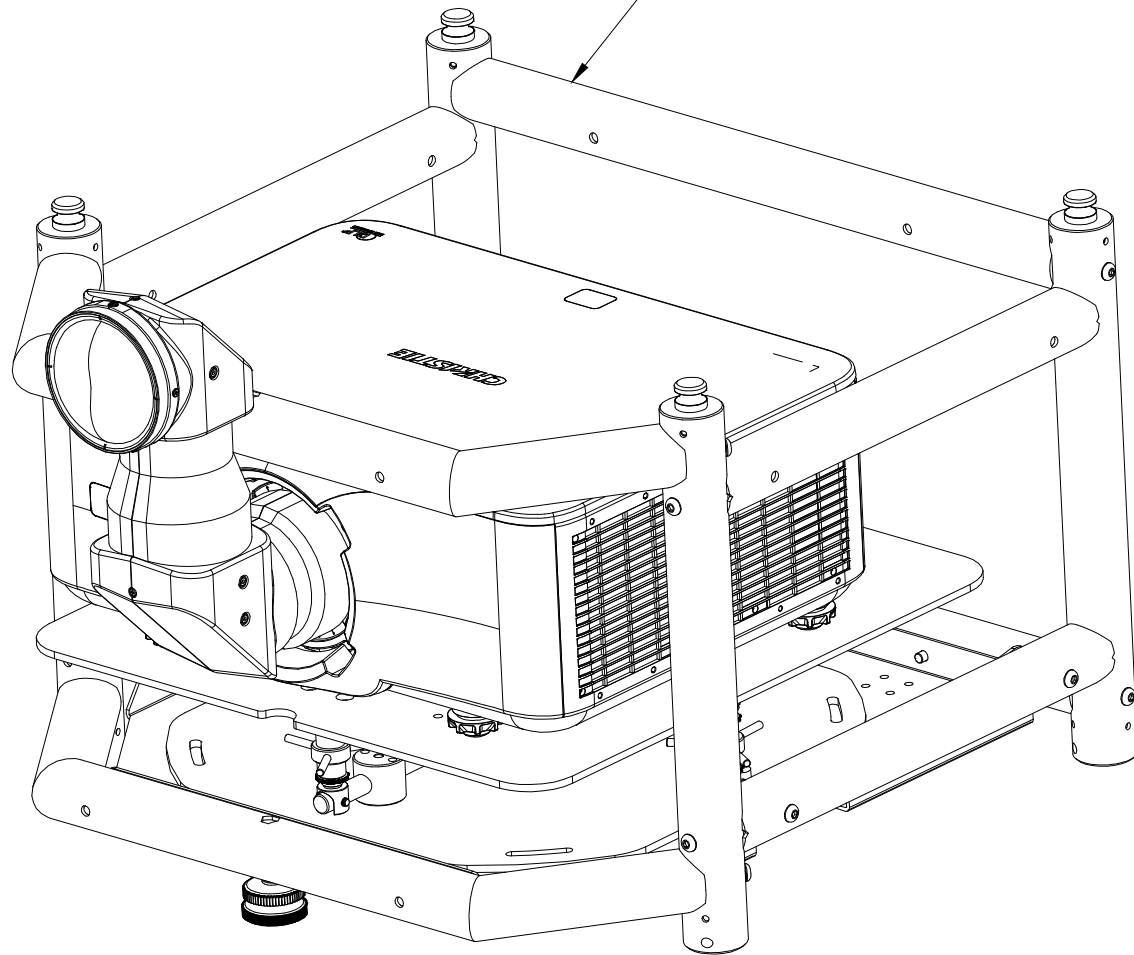

8

7

6


5

4

3

2

1

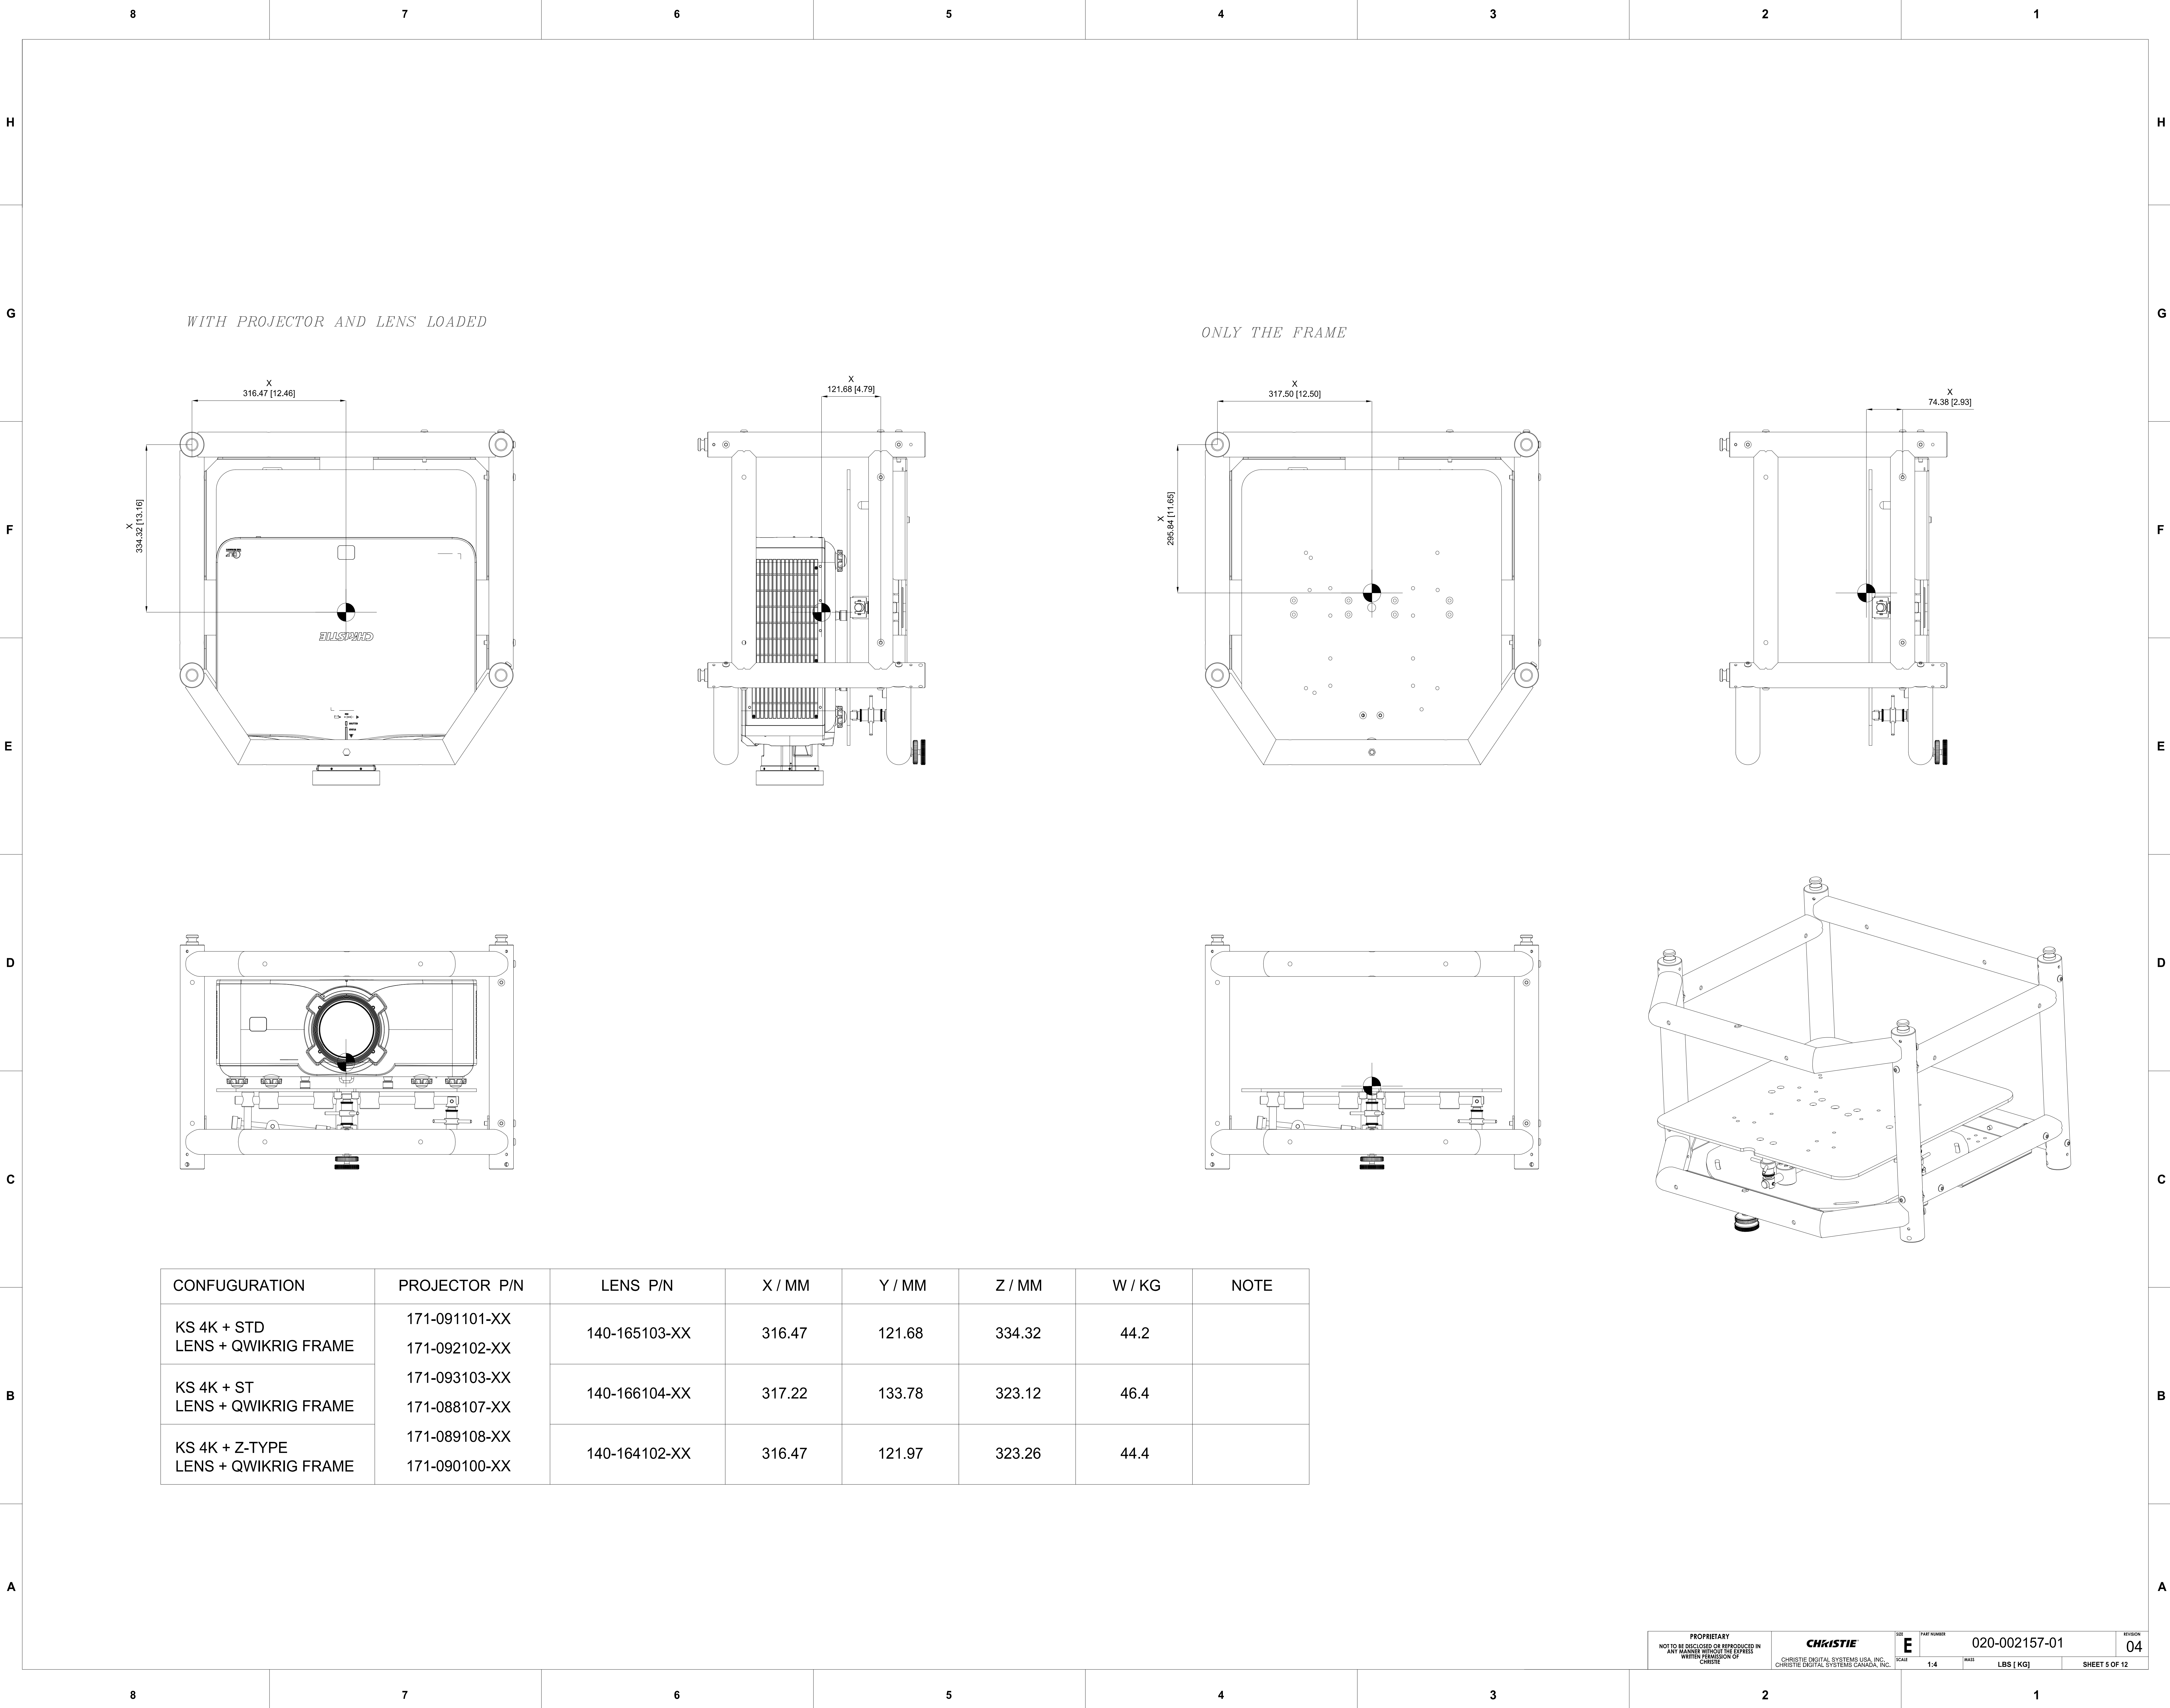

H

G

F

E

D

C

B

A

8

7

6

5

4

3

2

1

H

G

F


E

D

C


B

A







Roll Degrees

Step 2: Secure the Projector to the Rigging Frame by 4-M6x35 screws

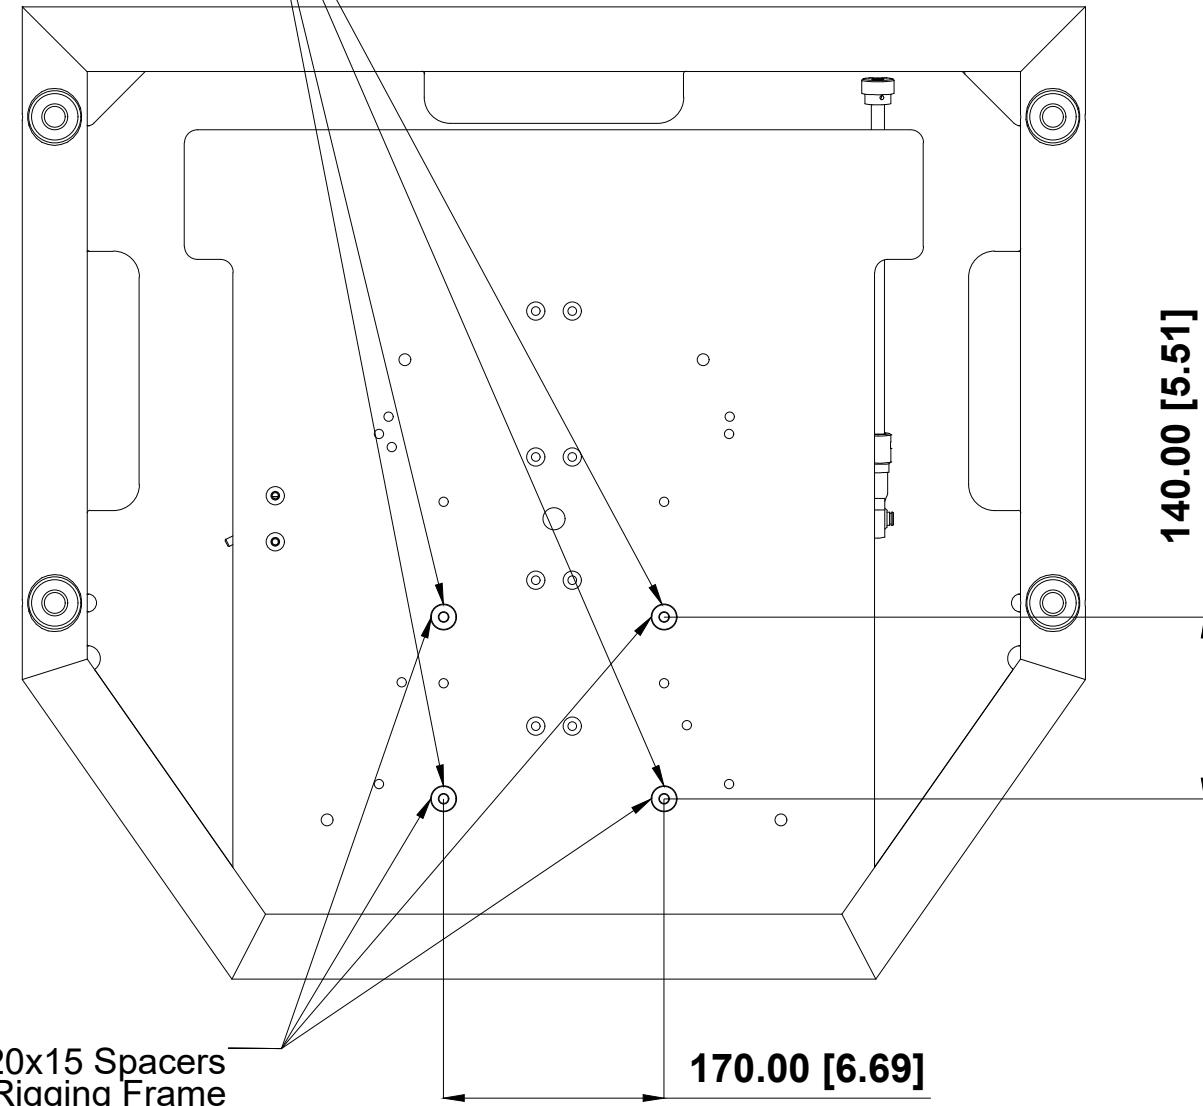


Step 1: Put 4- ϕ 20x15 Spacers on Rigging Frame

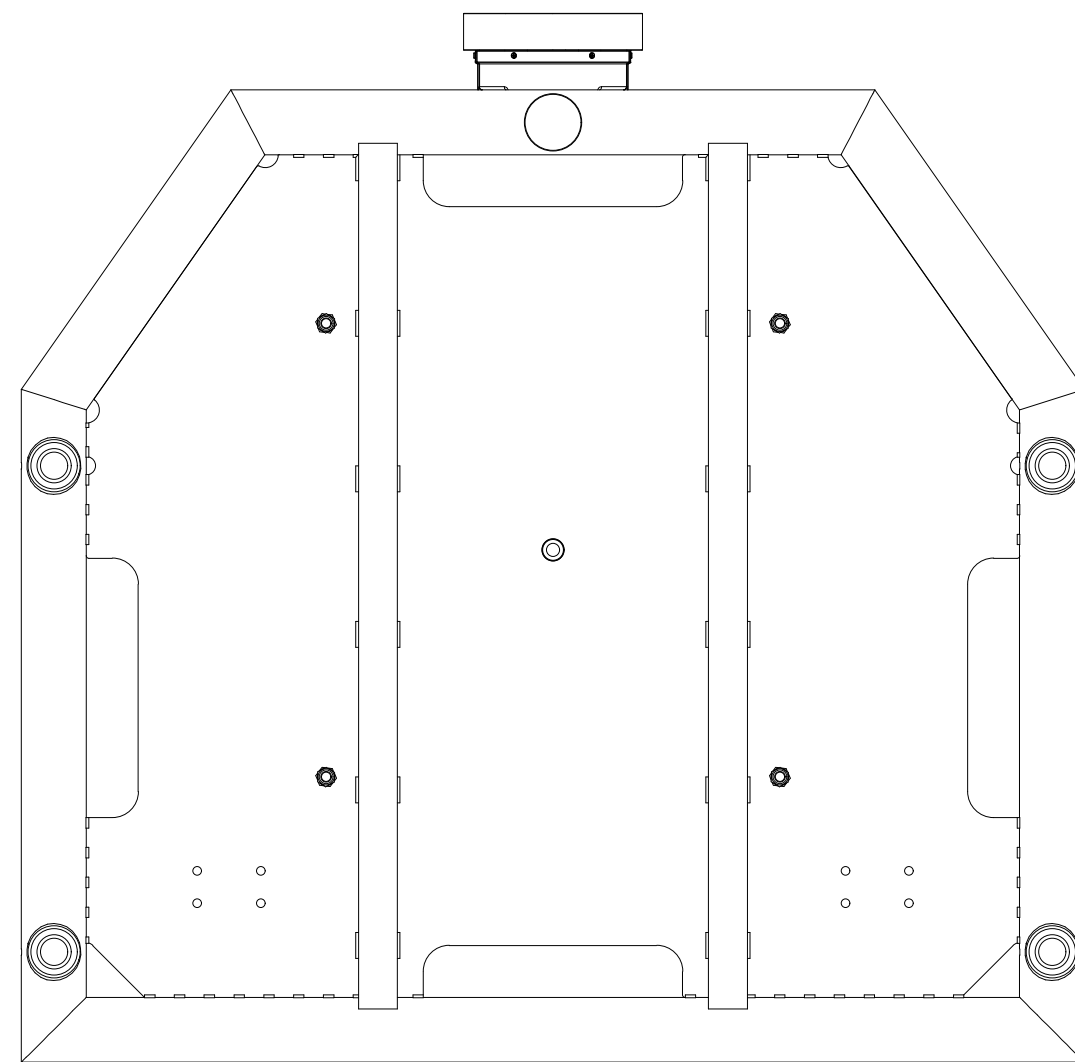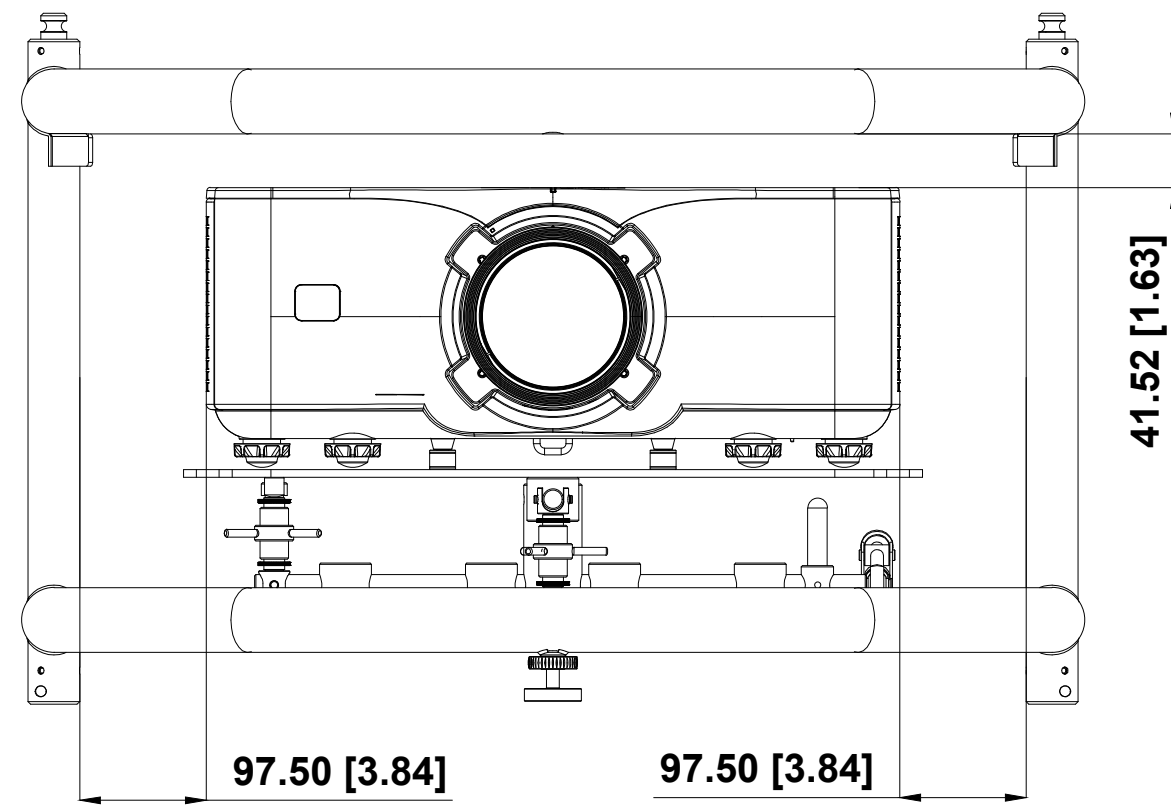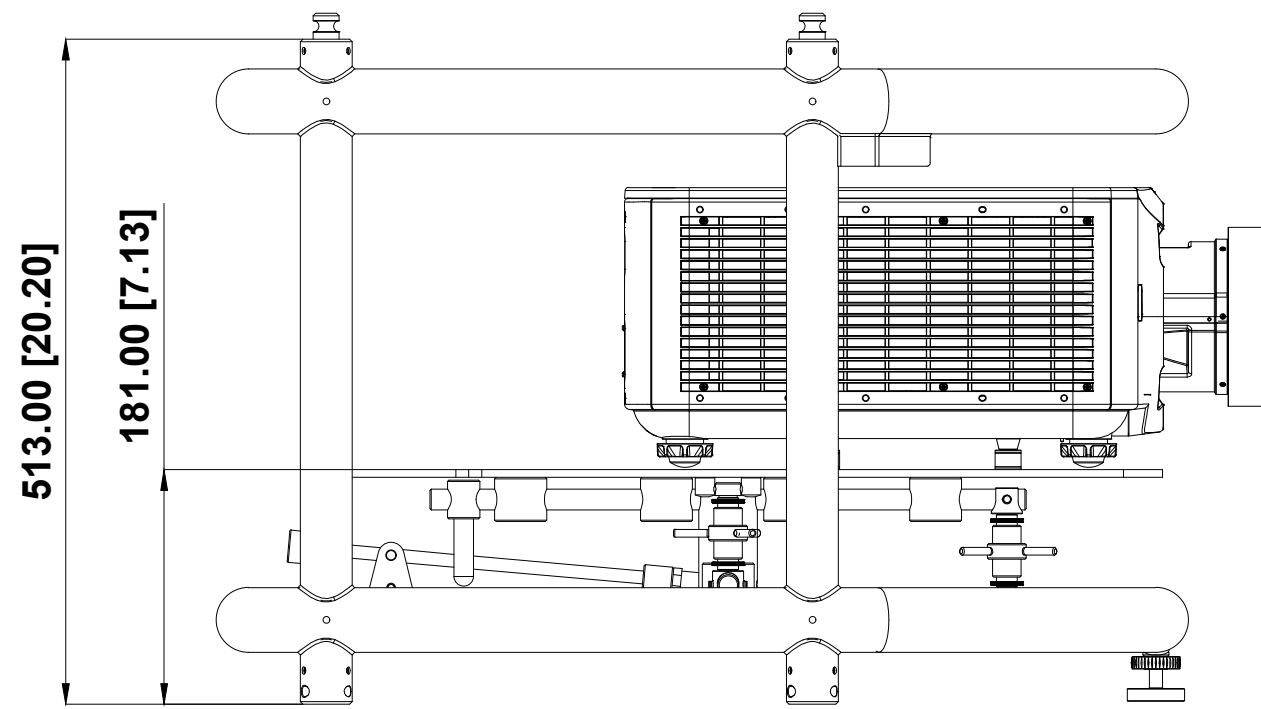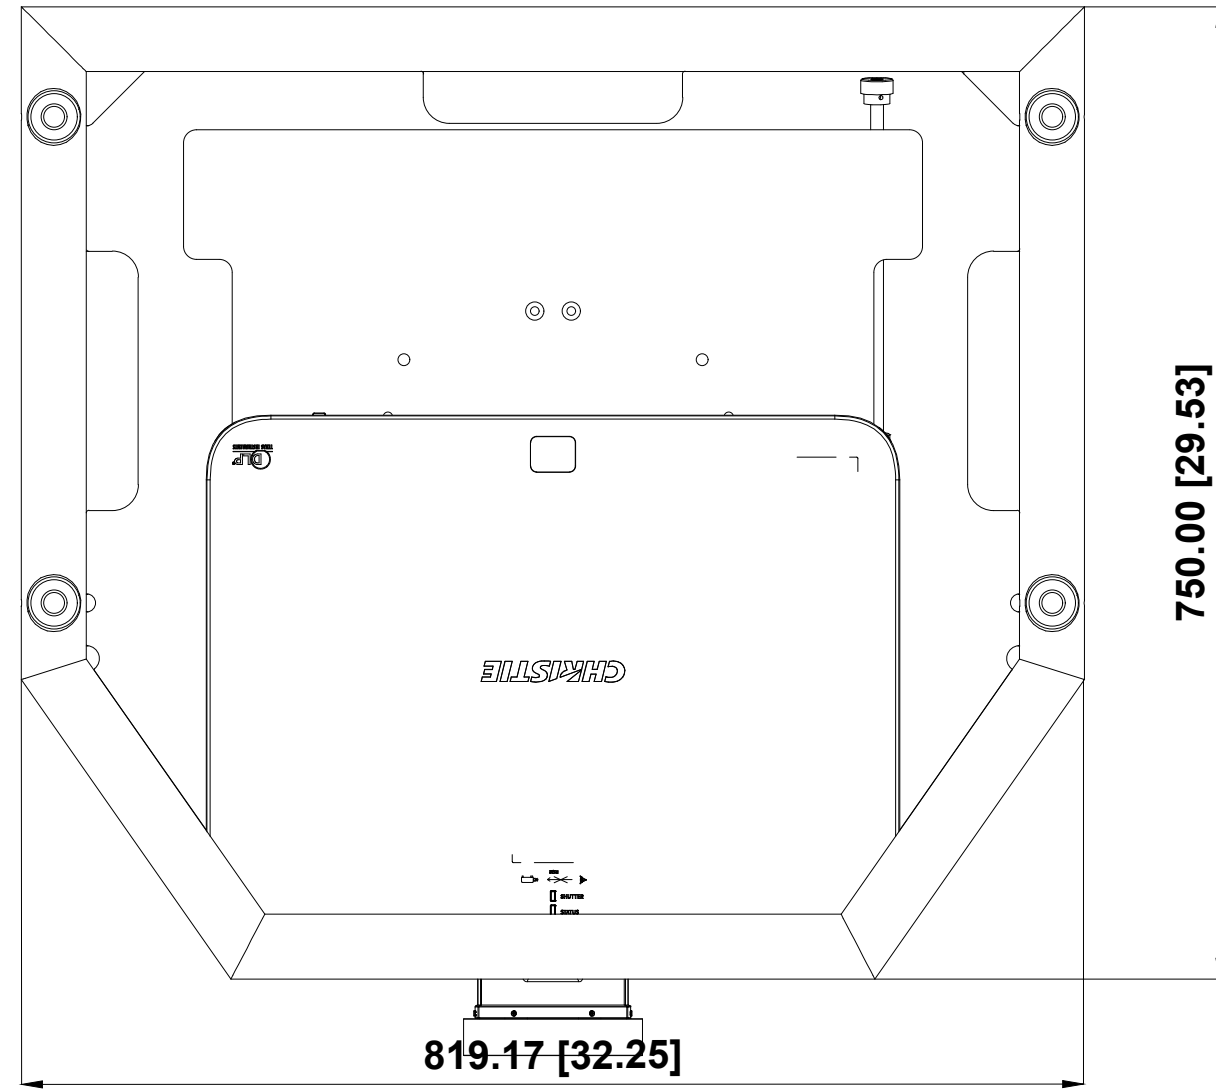


Specification

Weight Capacity	45 kg (99 lbs)
Maximum Dimensions	820 x 750 x 533 mm (32.3 x 29.5 x 21 inches)
Roll	$\pm 3^\circ$
Pitch	$\pm 3^\circ$
Yaw	$\pm 5^\circ$
Mass	35 kg (77 lbs)

20x7xH15 mm Aluminum Spacer
P/N: 012-104293-XX




$\phi 20.00$ [$\phi 0.79$]



$\phi 7.00$ [$\phi 0.28$]





4-C0.5




15.00 [0.59]

One Rigging Frame V2
P/N: 140-155102-XX

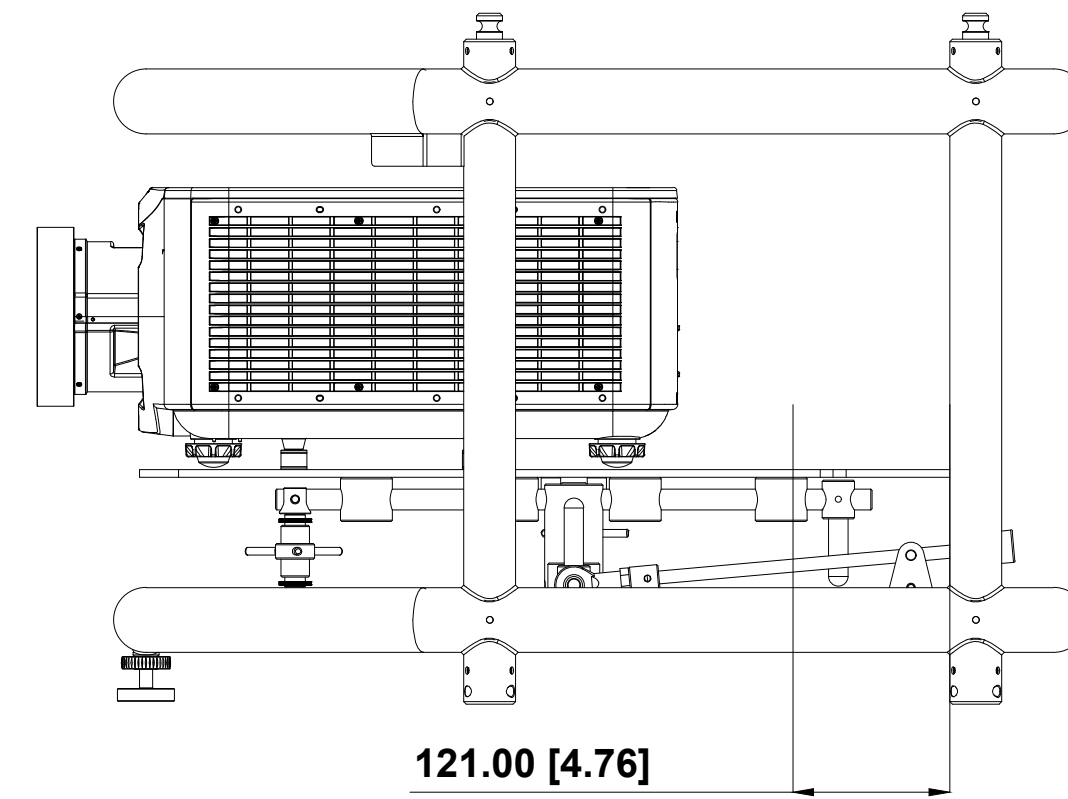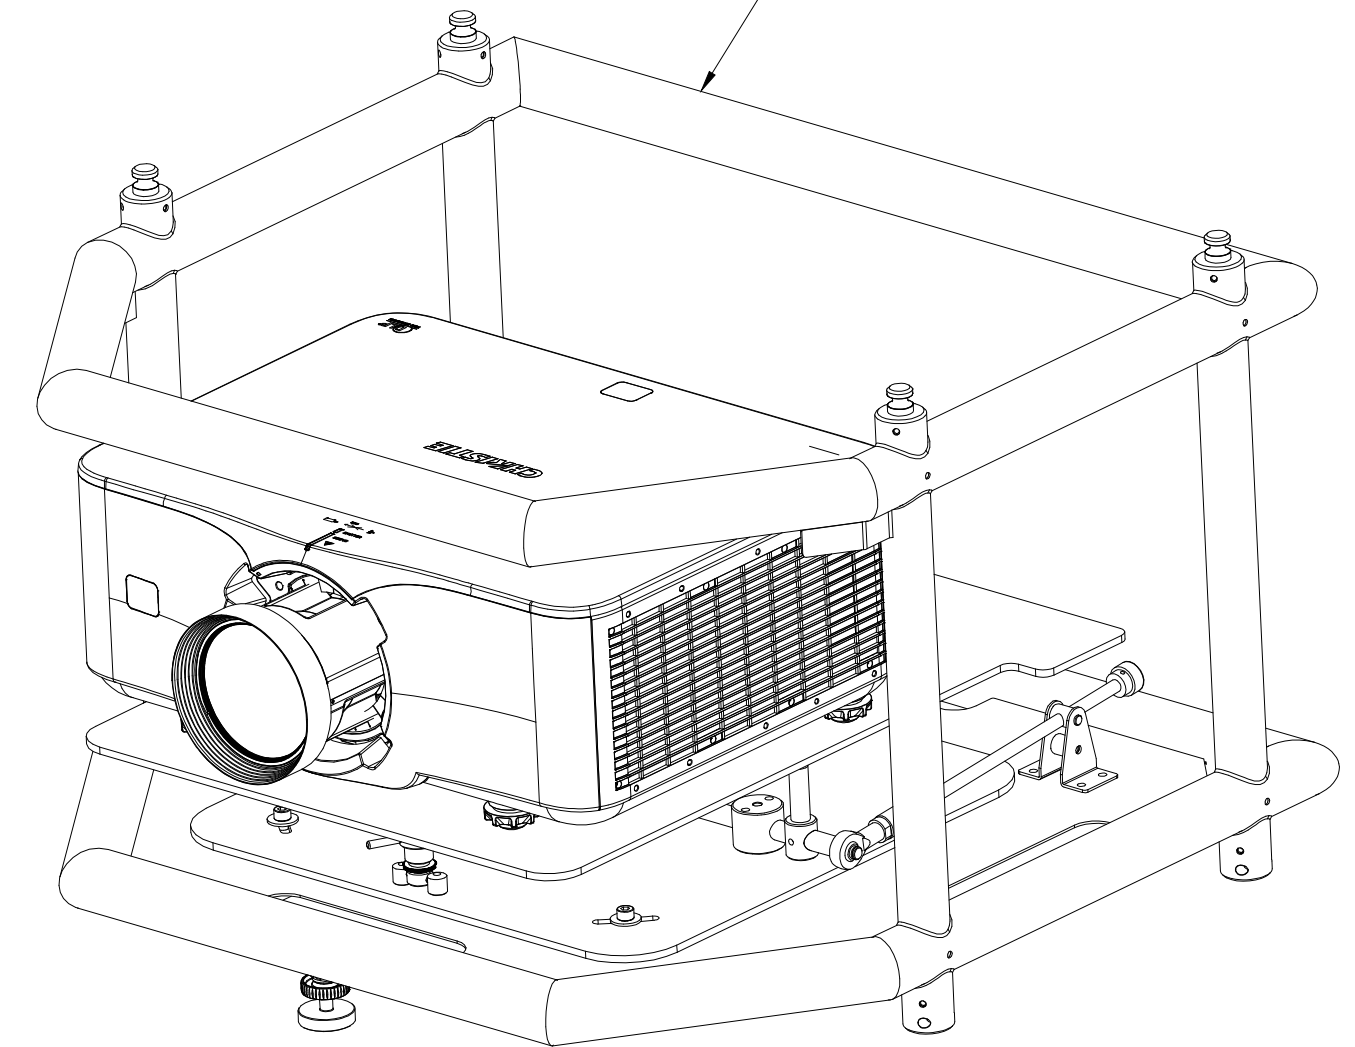

4.5° 4.5°

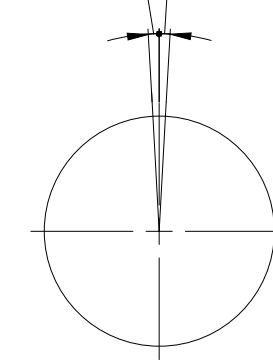

Pitch Degrees

8

7

6

5

4

3

2

1

H

G

F

E

D

C

B

A

8

7

6

5

4

3

2

1

H

G

F


E

D

C


B

A







Roll Degrees

Step 2: Secure the Projector to the Rigging Frame by 4-M6x35 screws

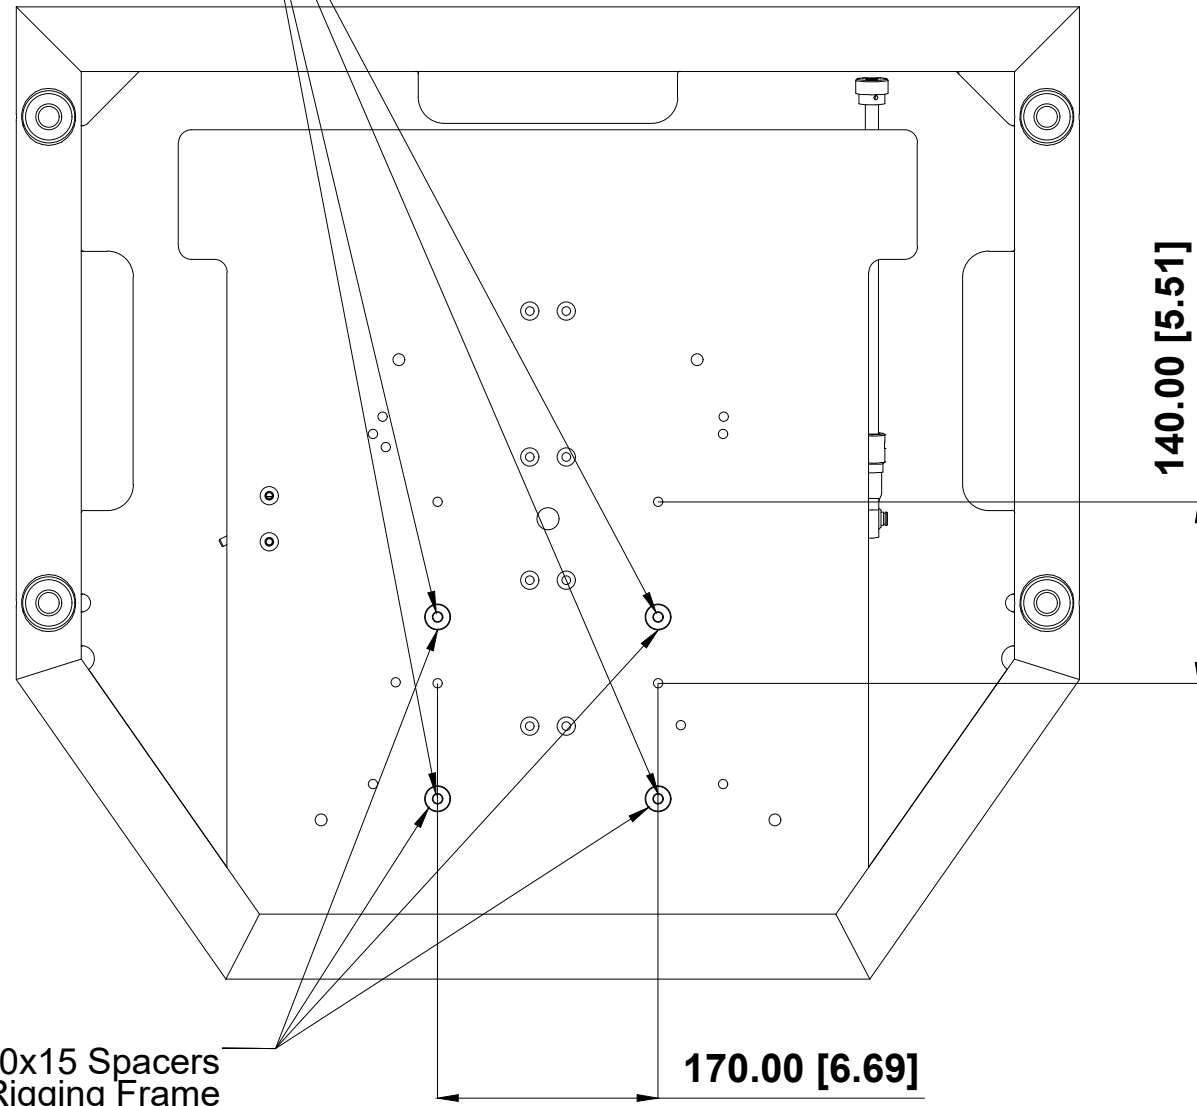


Step 1: Put 4- ϕ 20x15 Spacers on Rigging Frame

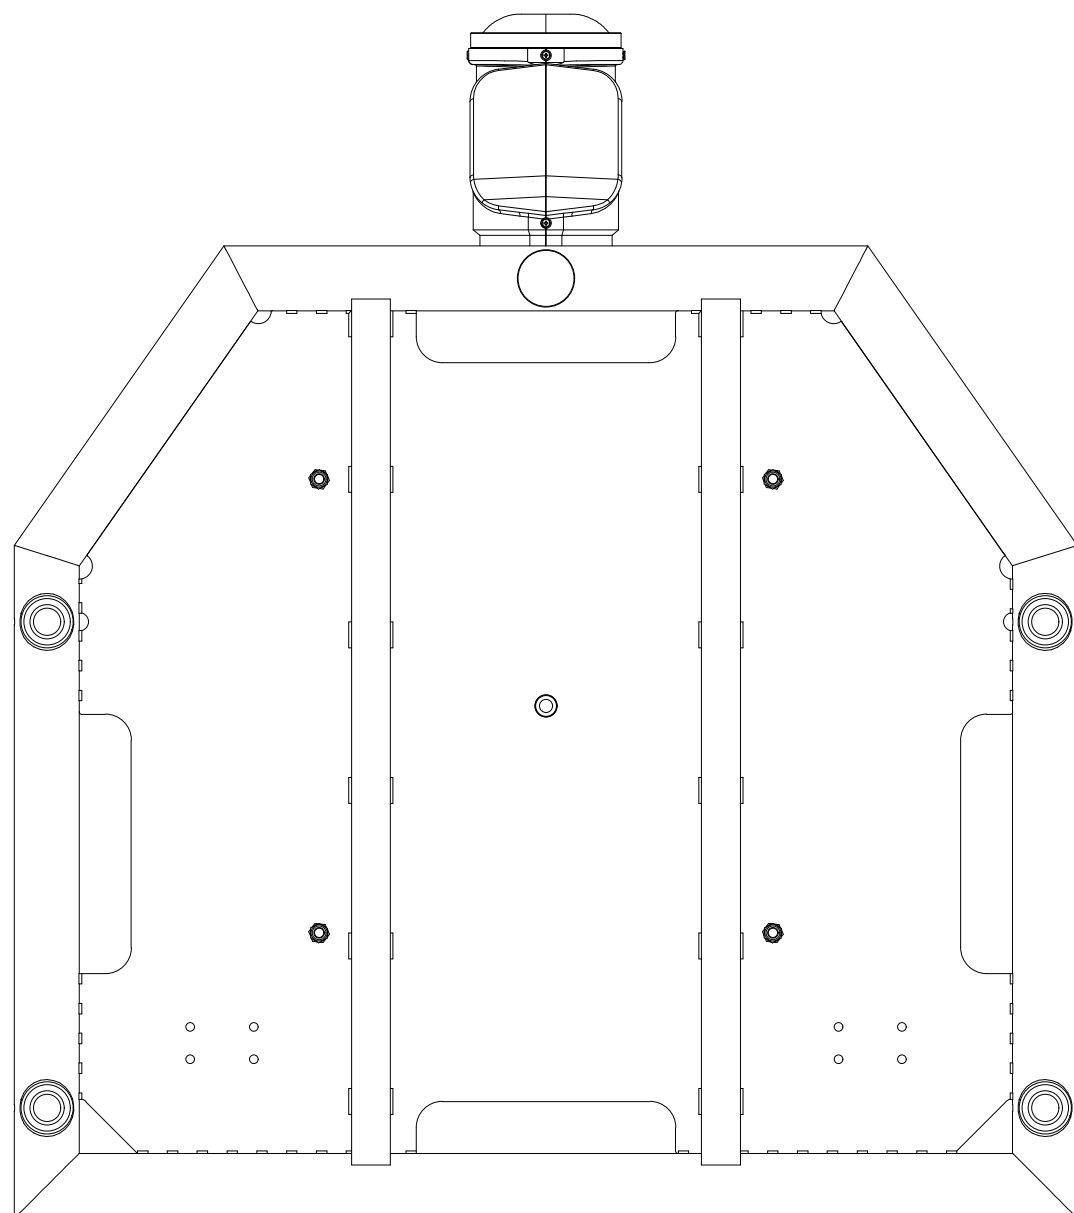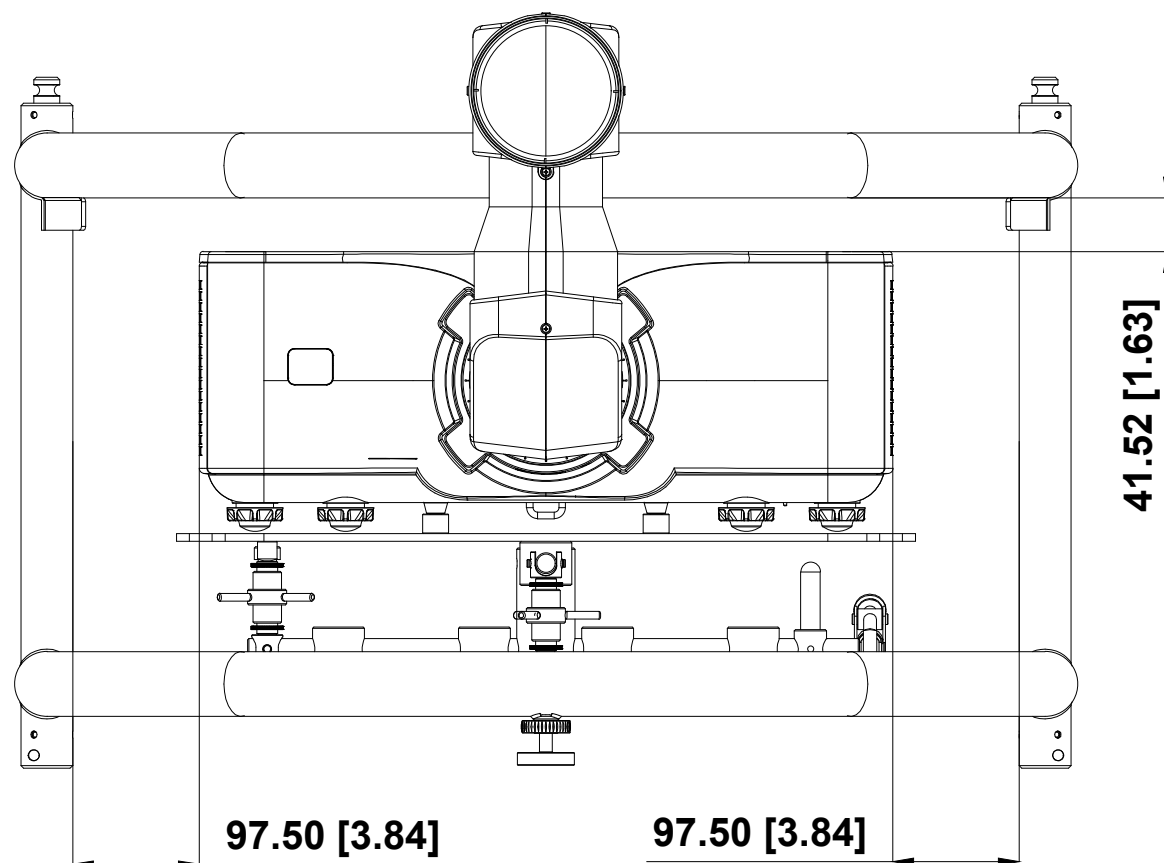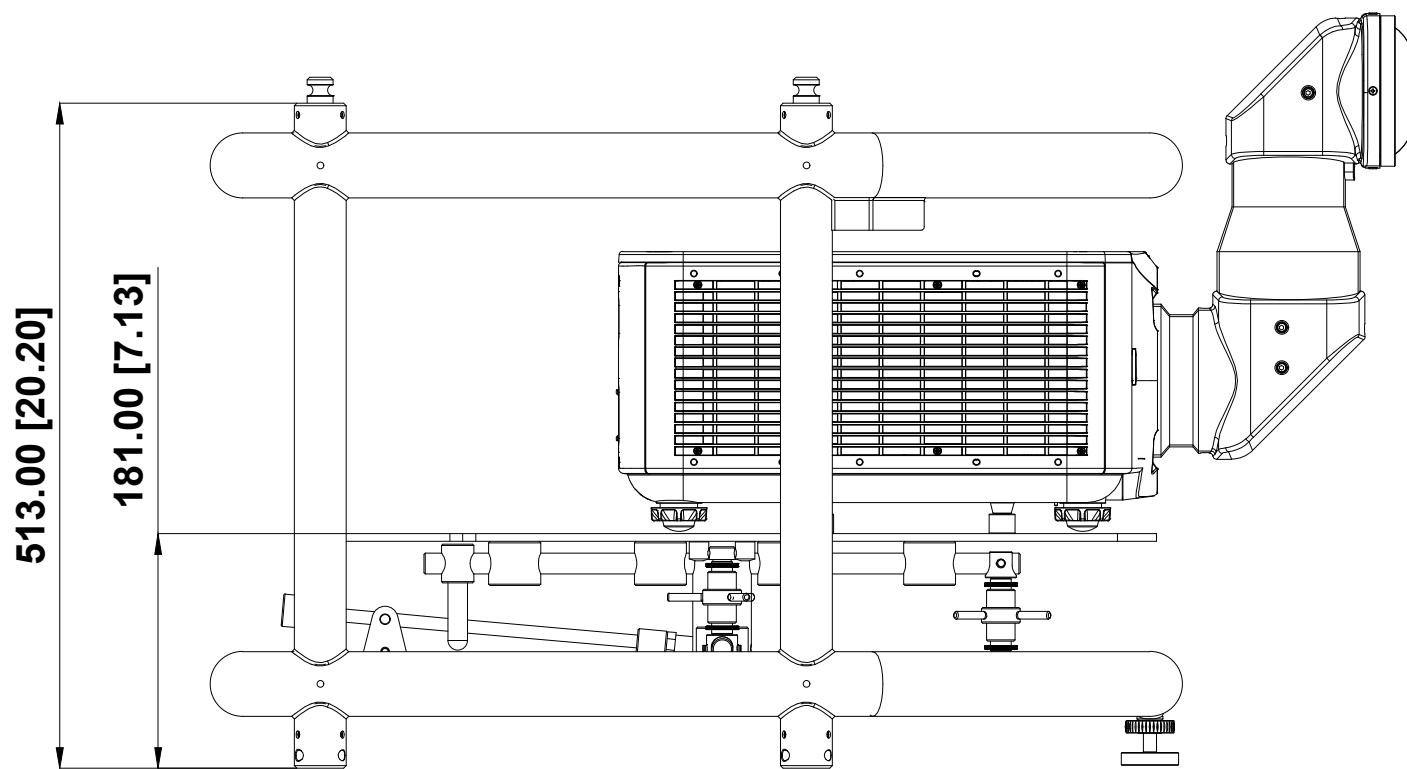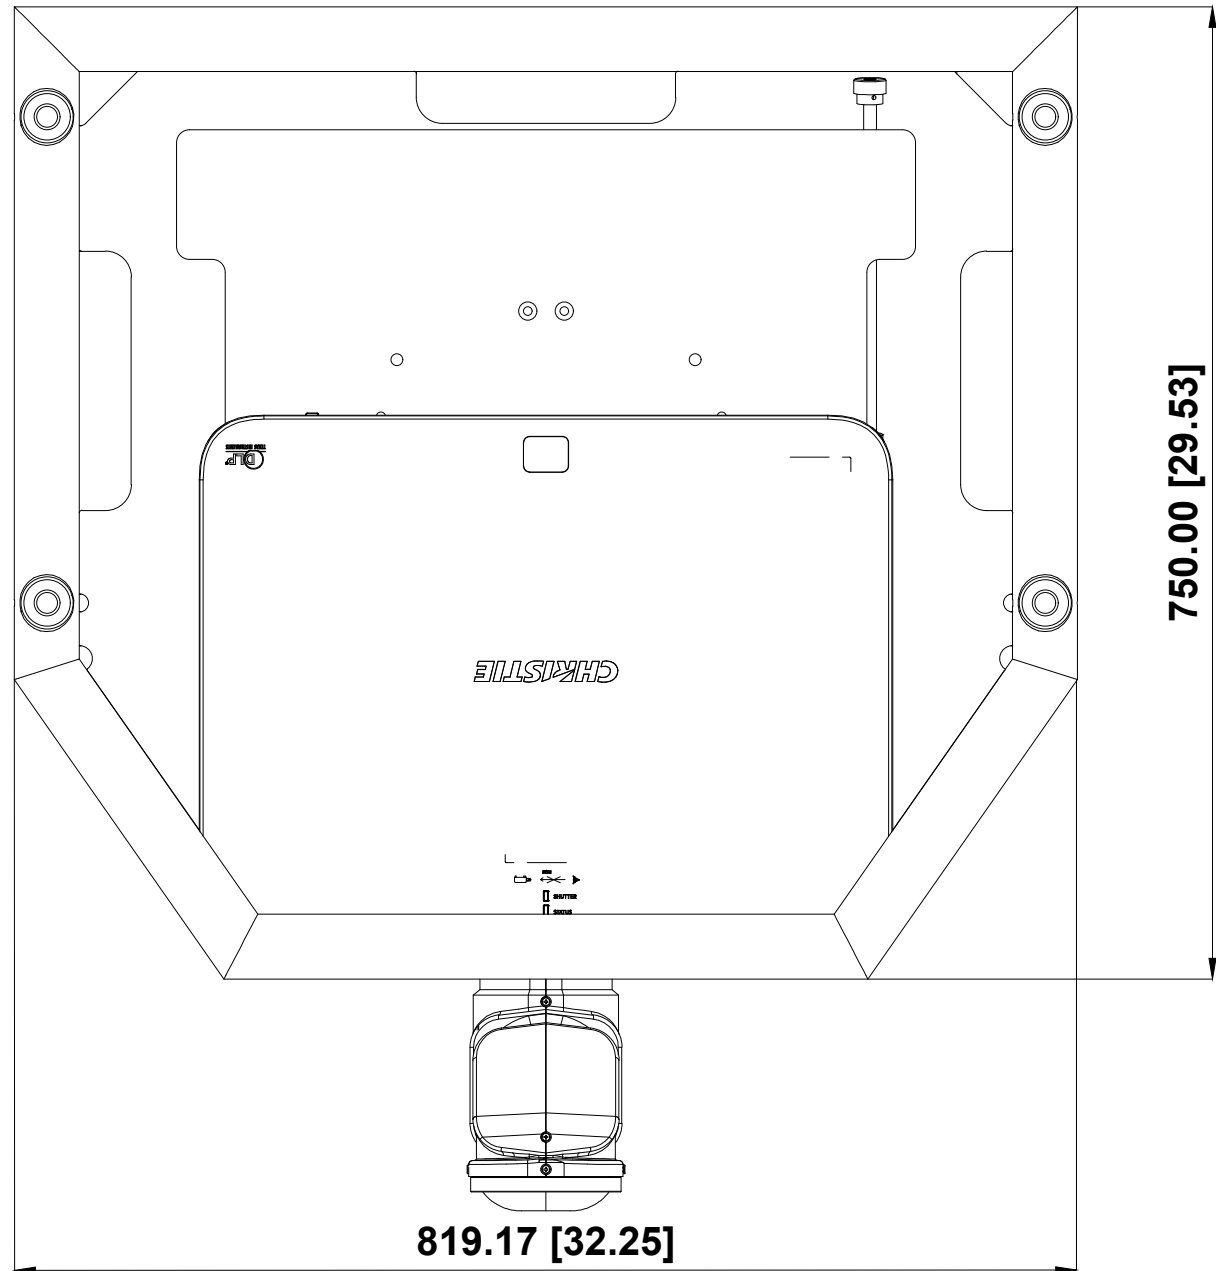


Specification

Weight Capacity	45 kg (99 lbs)
Maximum Dimensions	820 x 750 x 533 mm (32.3 x 29.5 x 21 inches)
Roll	$\pm 3^\circ$
Pitch	$\pm 3^\circ$
Yaw	$\pm 5^\circ$
Mass	35 kg (77 lbs)

20x7xH15 mm Aluminum Spacer
P/N: 012-104293-XX




$\phi 20.00$ [$\phi 0.79$]



$\phi 7.00$ [$\phi 0.28$]





4-C0.5




15.00 [0.59]

One Rigging Frame V2
P/N: 140-155102-XX

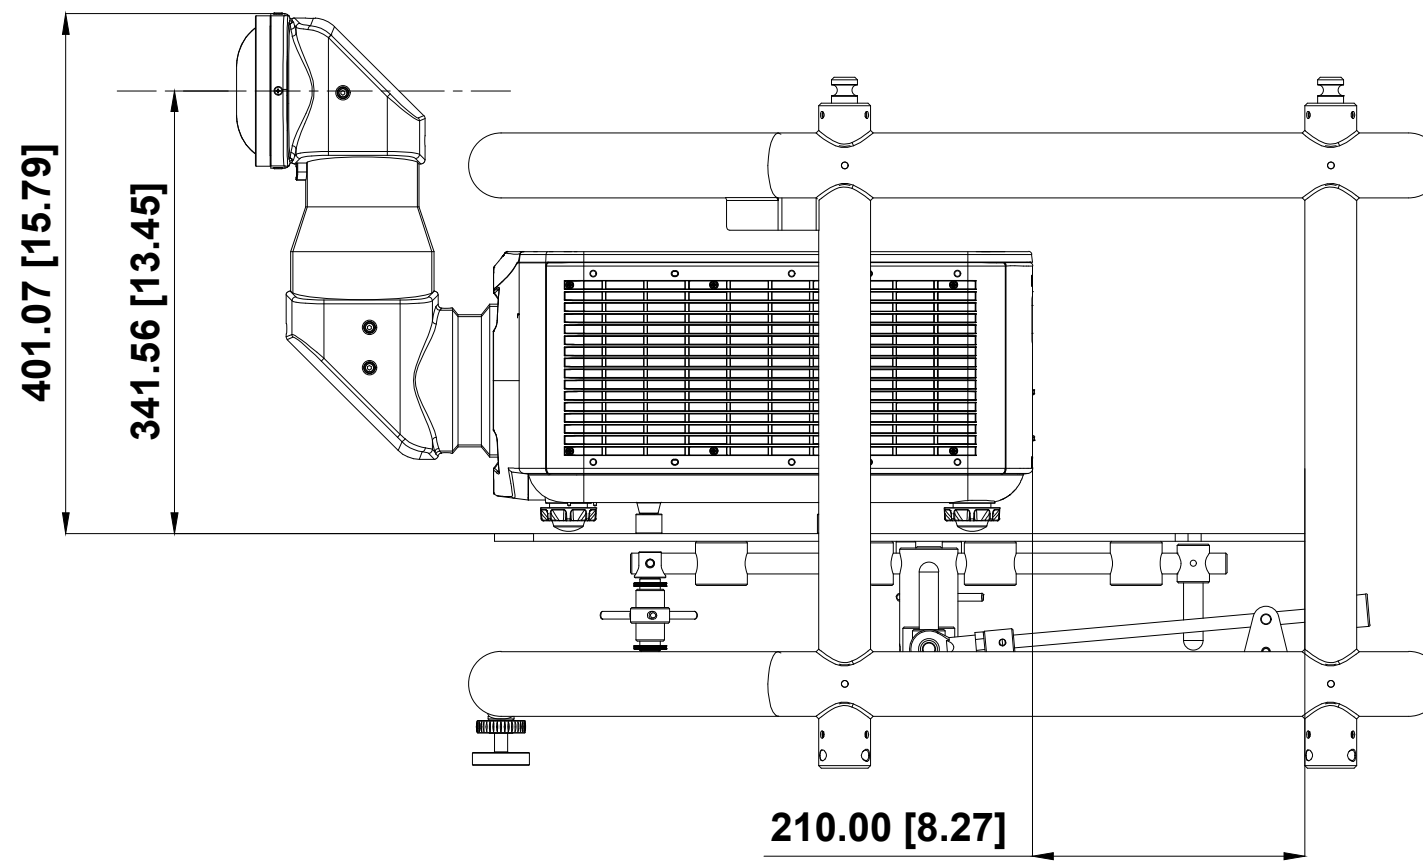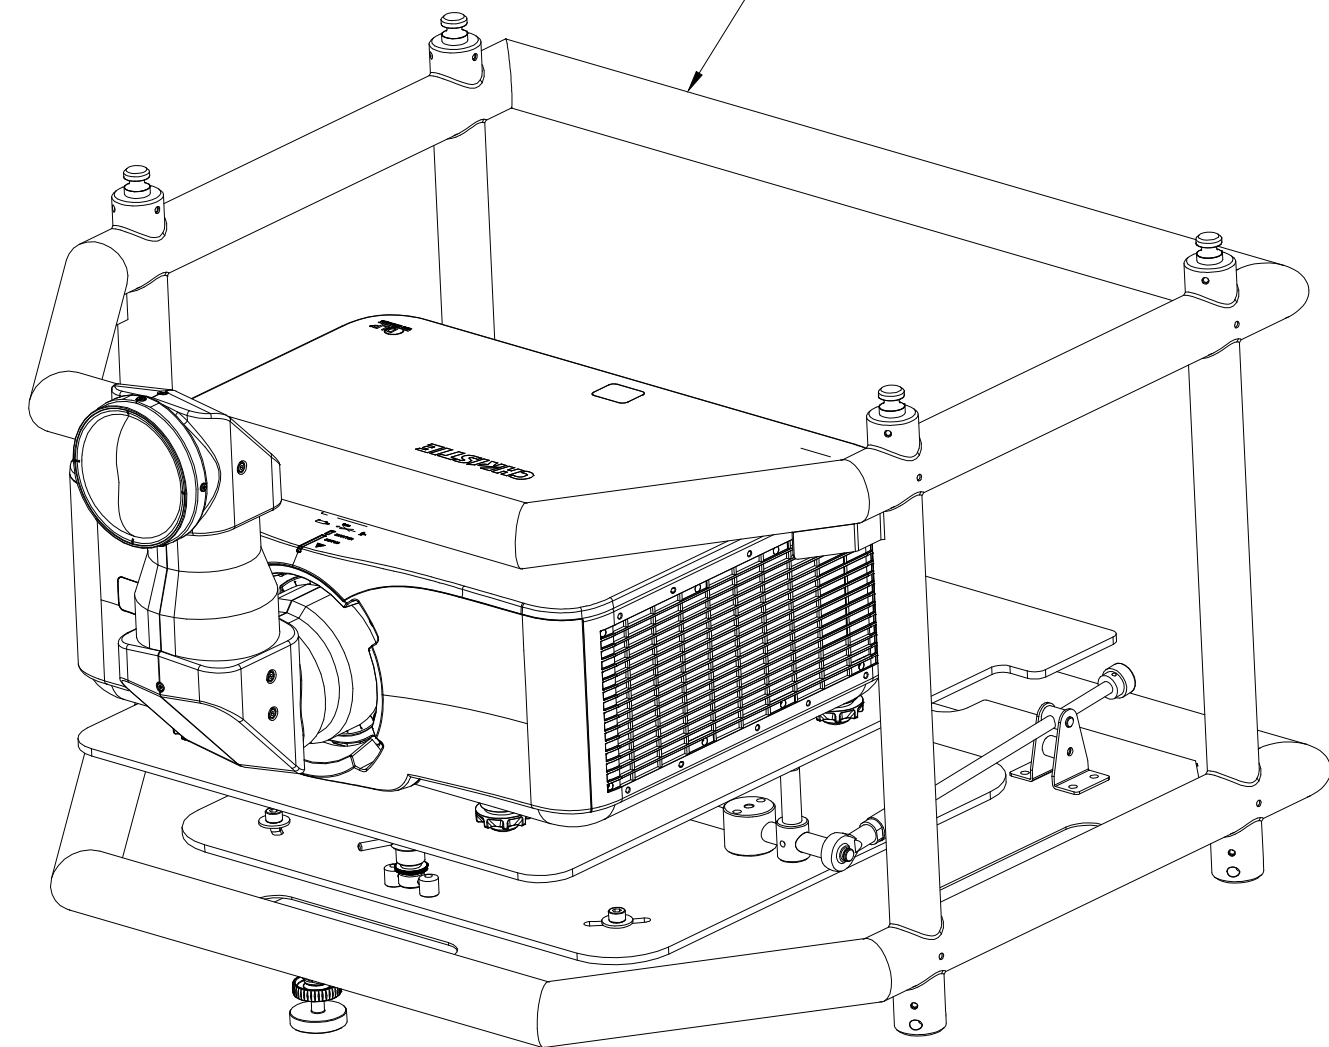

4.5° 4.5°

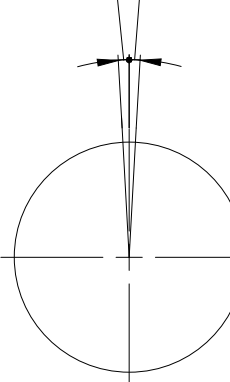

Pitch Degrees

8

7

6


5

4

3

2

1

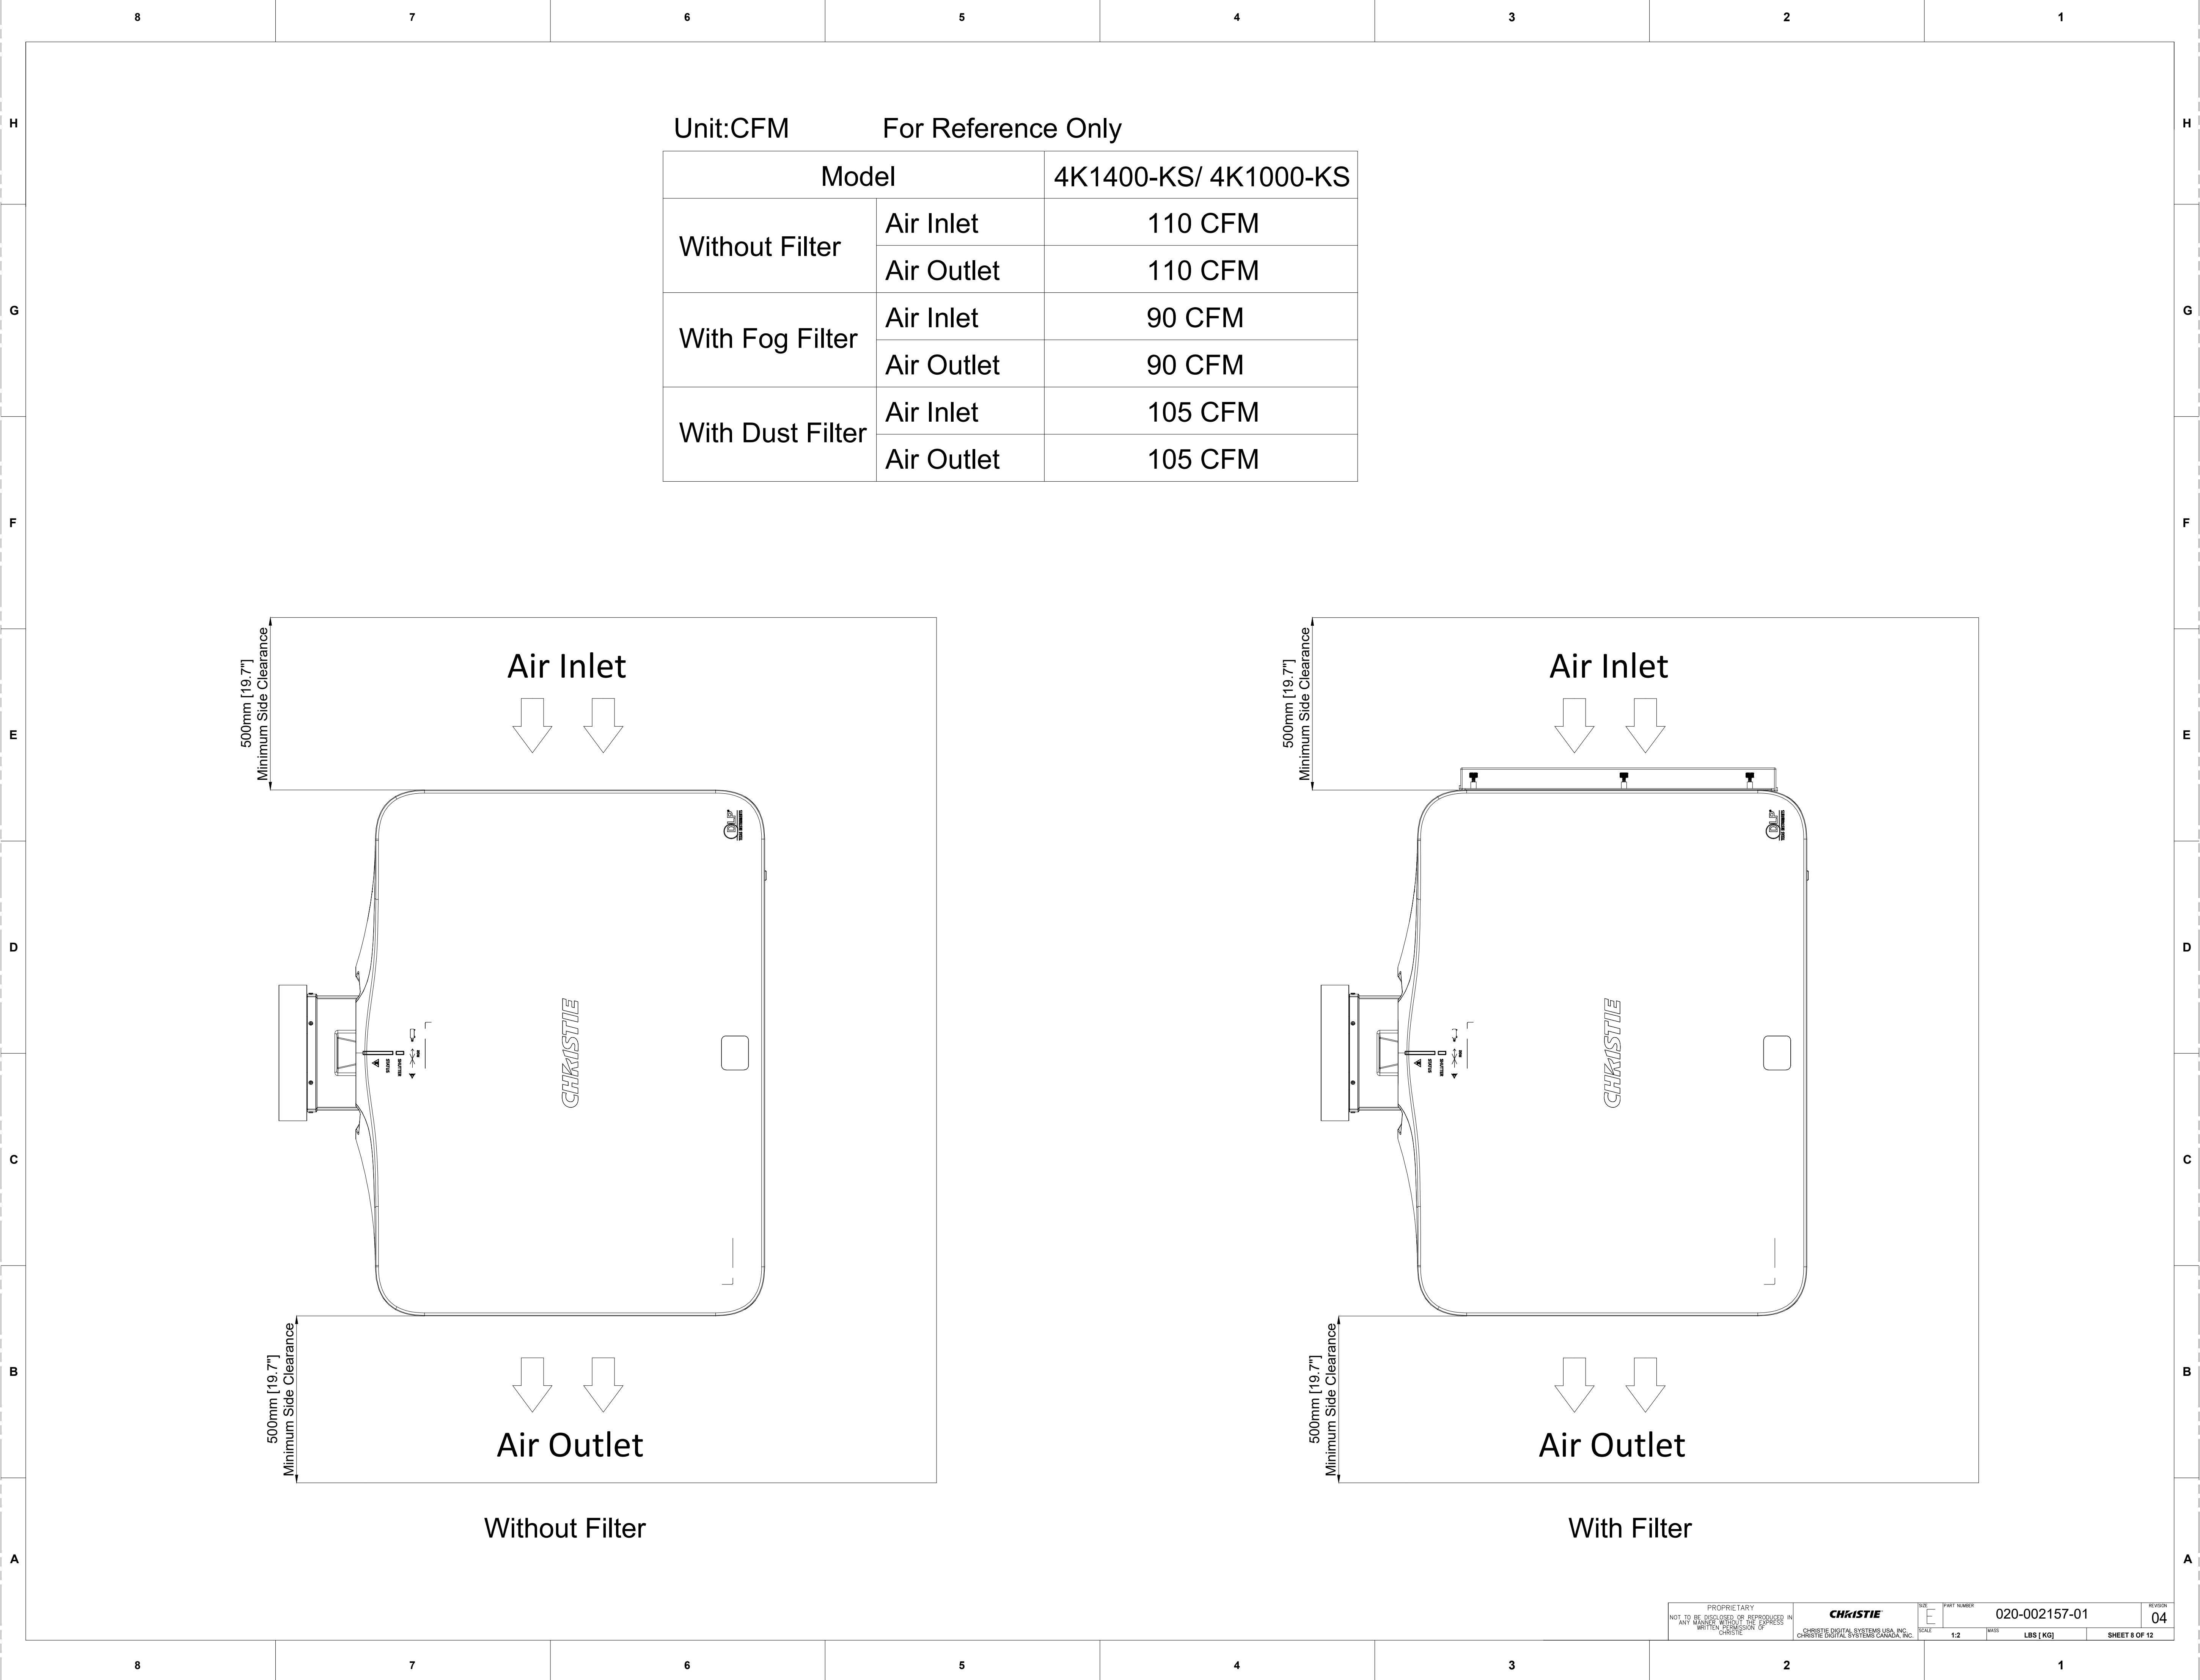

H
G
F
E
D
C
B
A

H
G
F
E
D
C
B
A

8

7

6

5

4

3

2

1

8

7

6





5

4





3

2


1

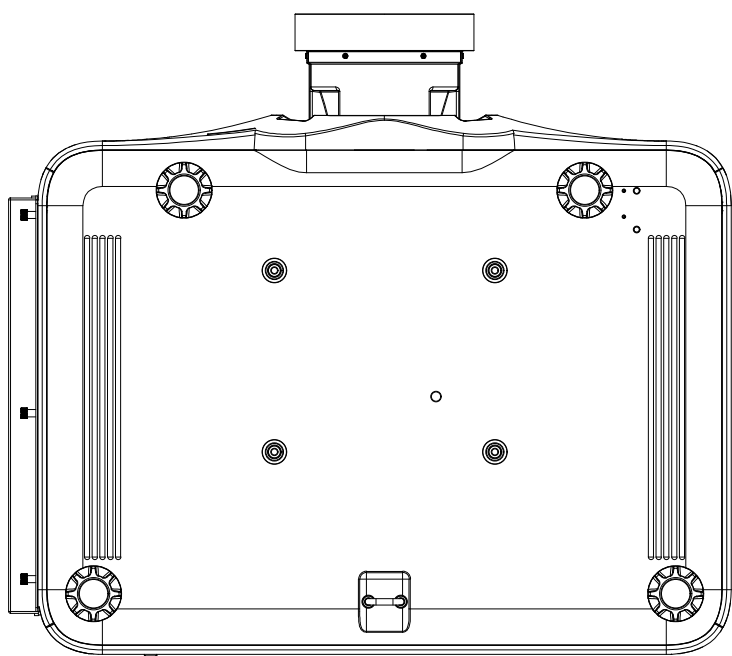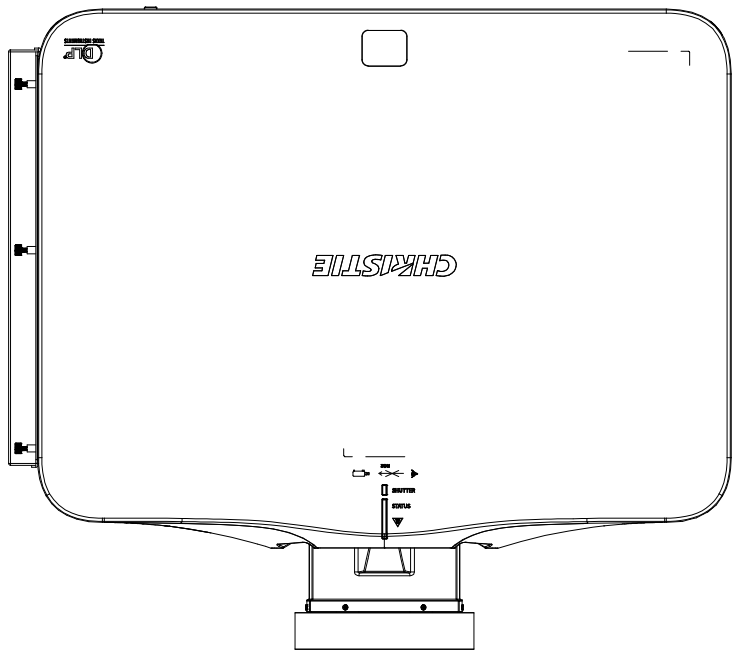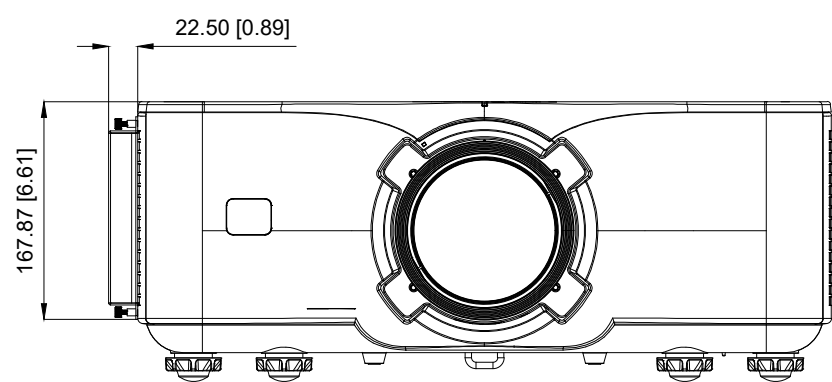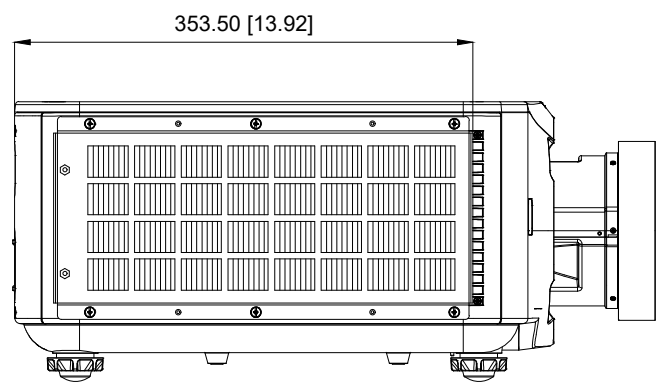


Specification	
Model	Christie KS Series Model
Product NO.	140-167105-XX 140-168106-XX 140-169107-XX
Dimension	323.5x156.3x26.5mm (13.15x4.97x0.85 inch)
Mass	342.25g (0.75lbs)

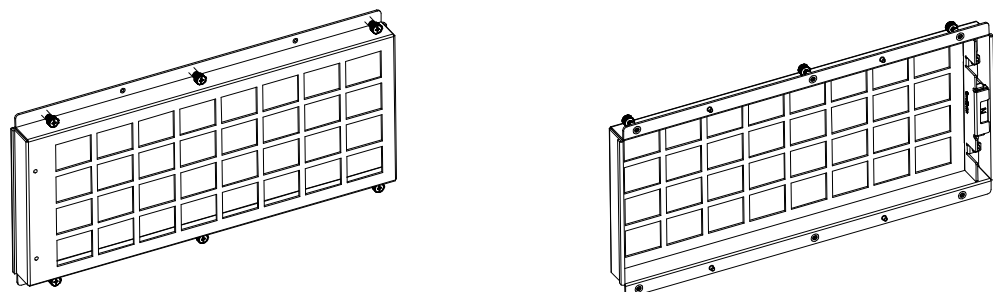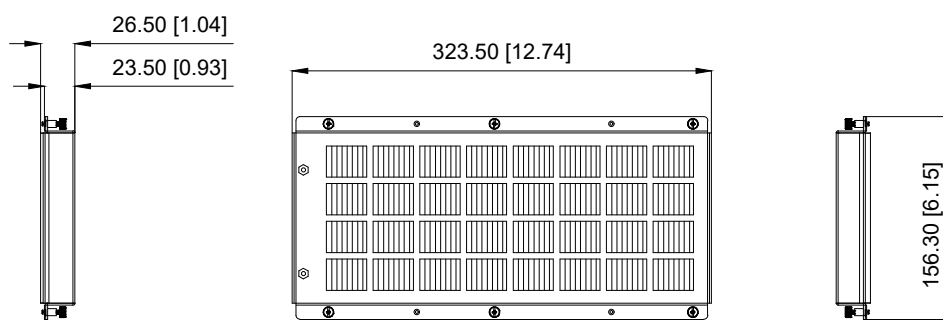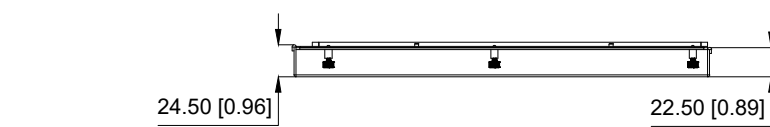


140-167105-XX

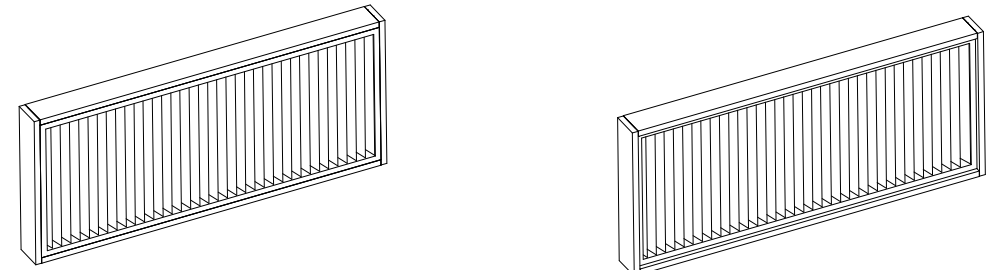


140-168106-XX

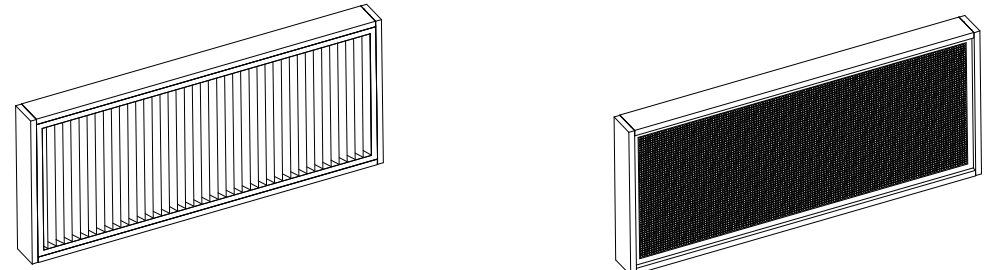



140-169107-XX

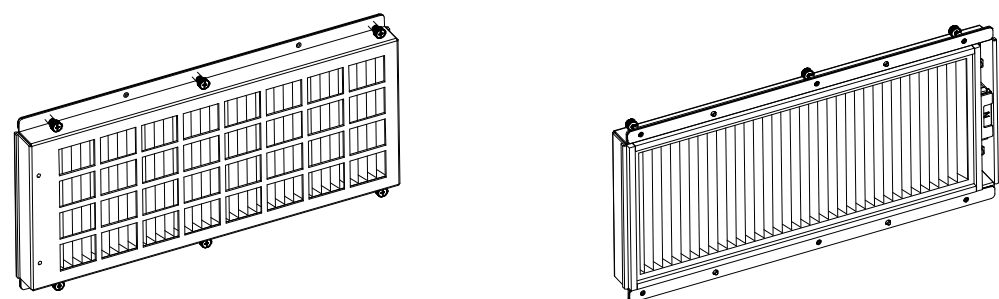

FOG FILTER ASSY

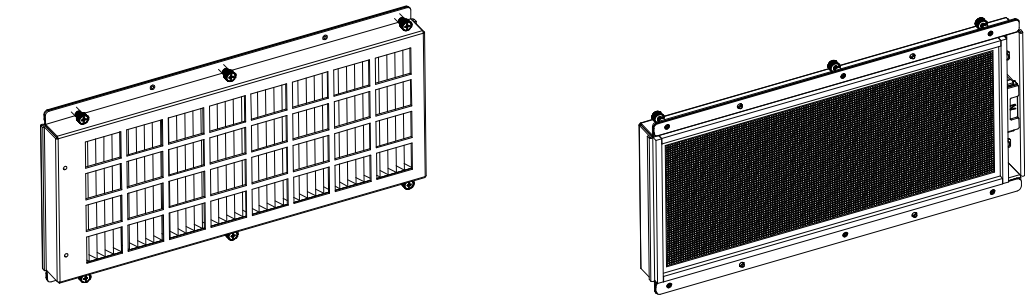

DUST FILTER ASSY

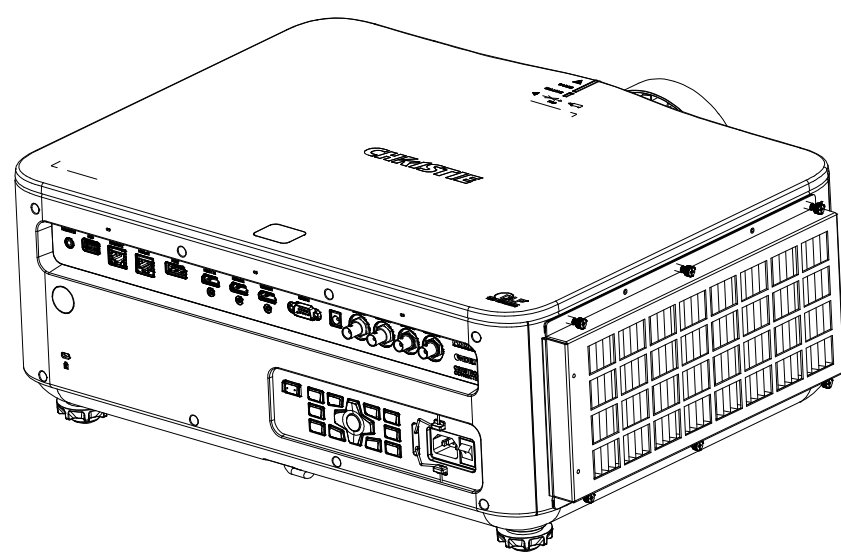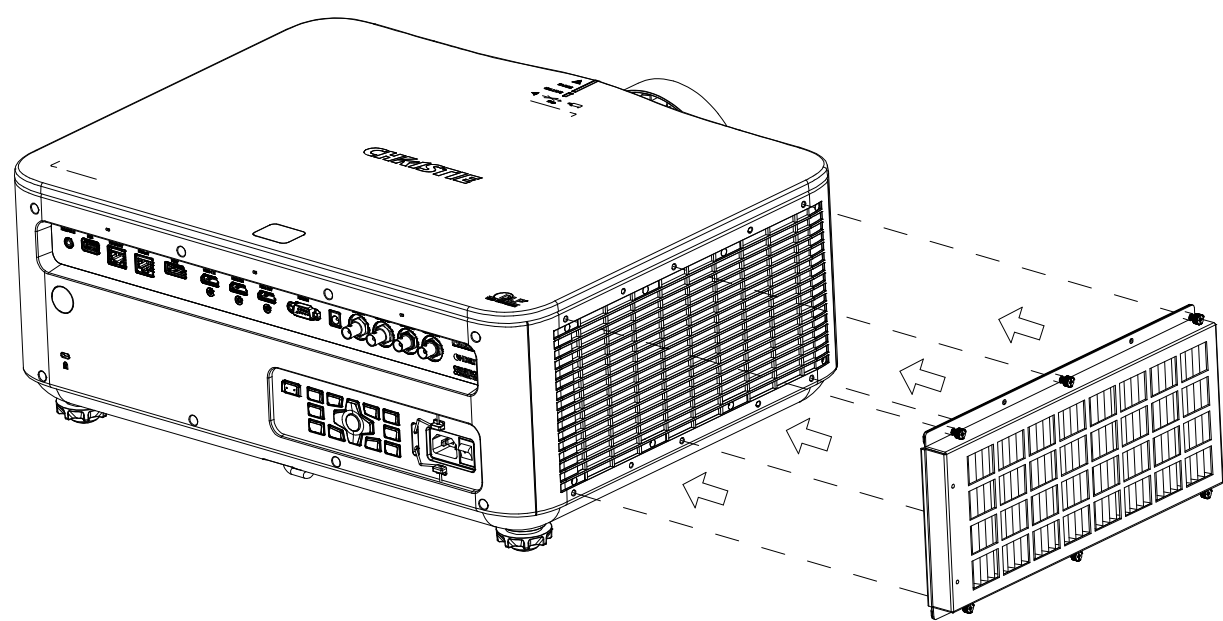

H

G

F

E

D

C

B

A

8

7

6

5

4

3

2

1

H

G

F

E







D

C

B

A

Specification	
Model	Christie C1C 1DLP Camera
Product NO.	156-155102-XX
Dimension	93 x 84 x 48.5 mm (3.67 x 3.30 x 1.91 inches)
Mass	0.2 Kg (0.44 lbs)

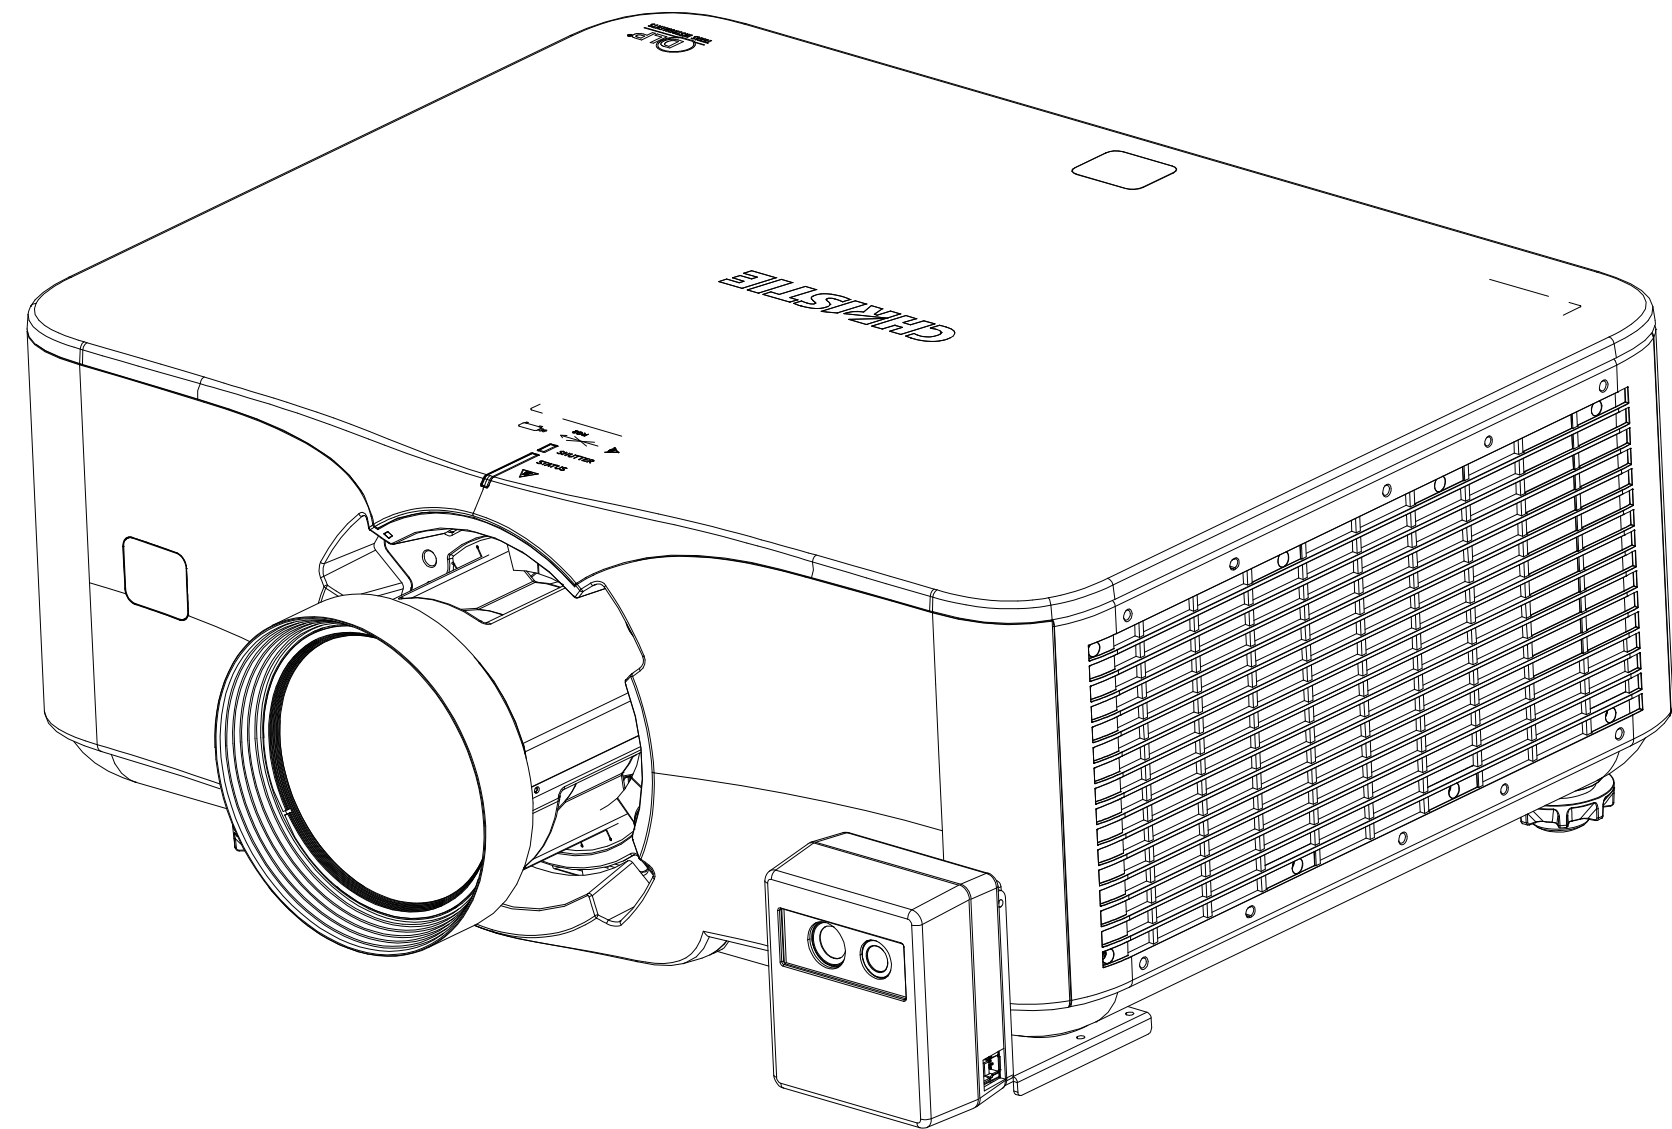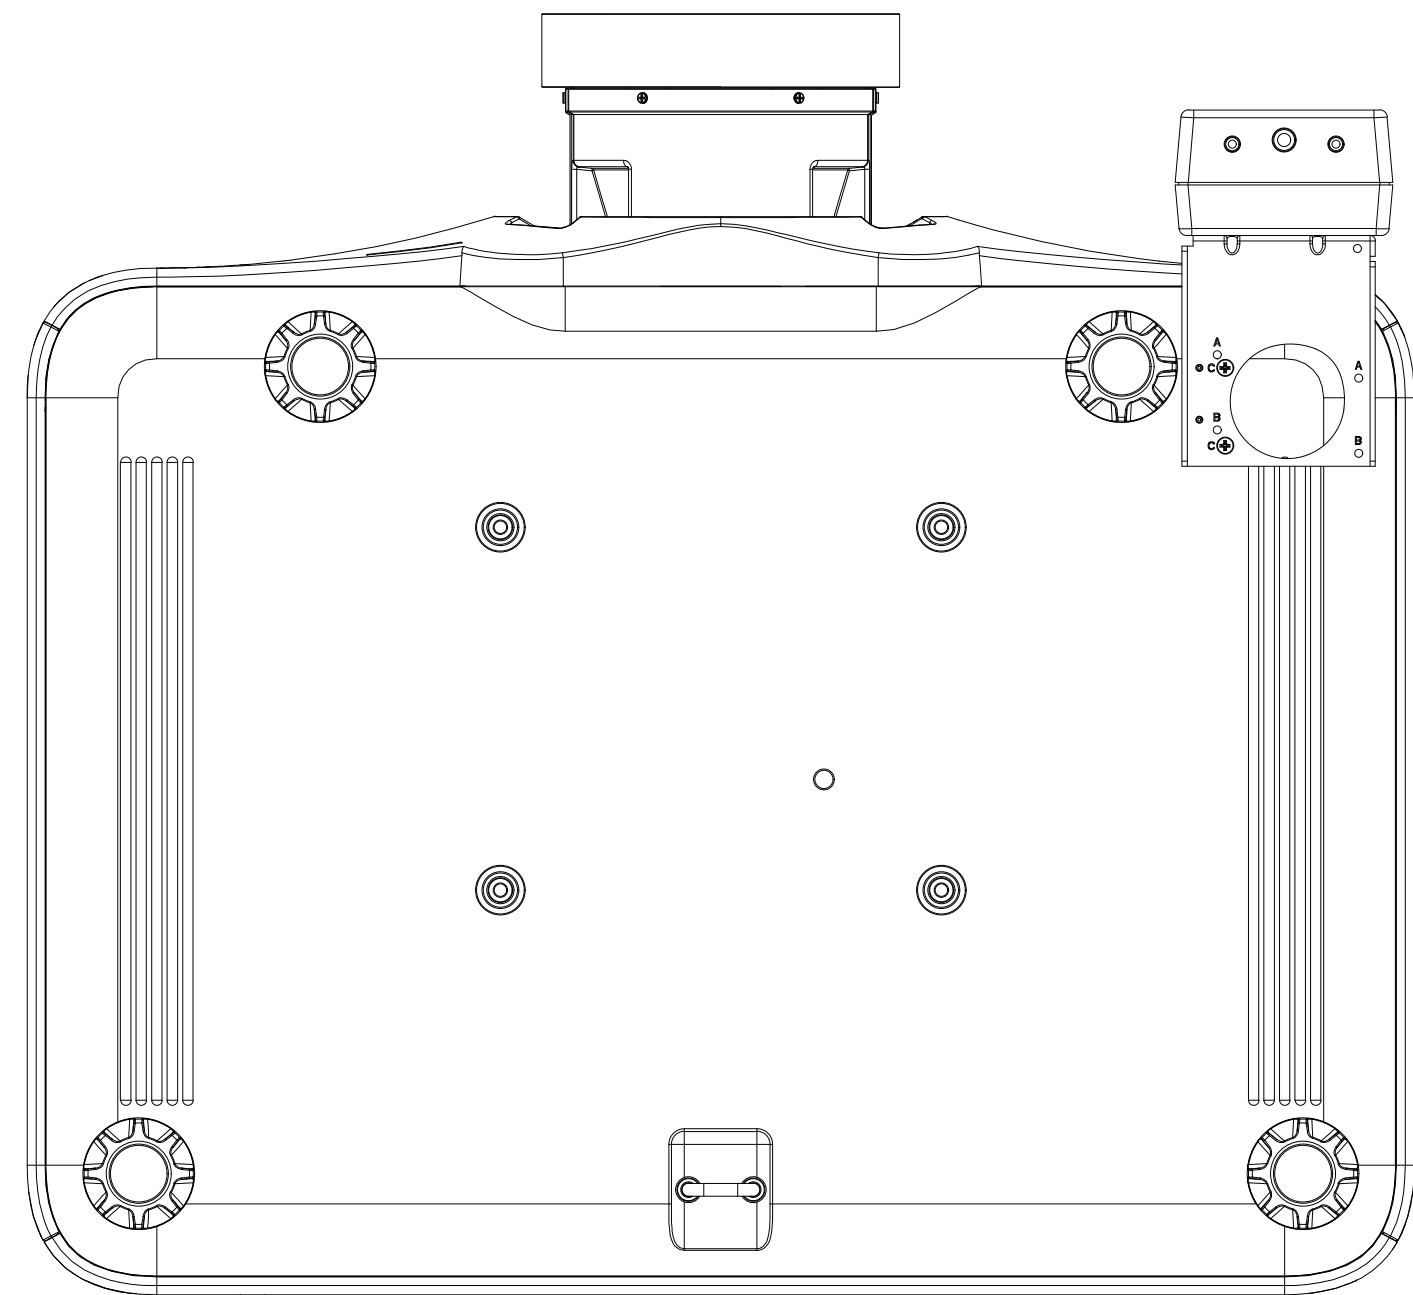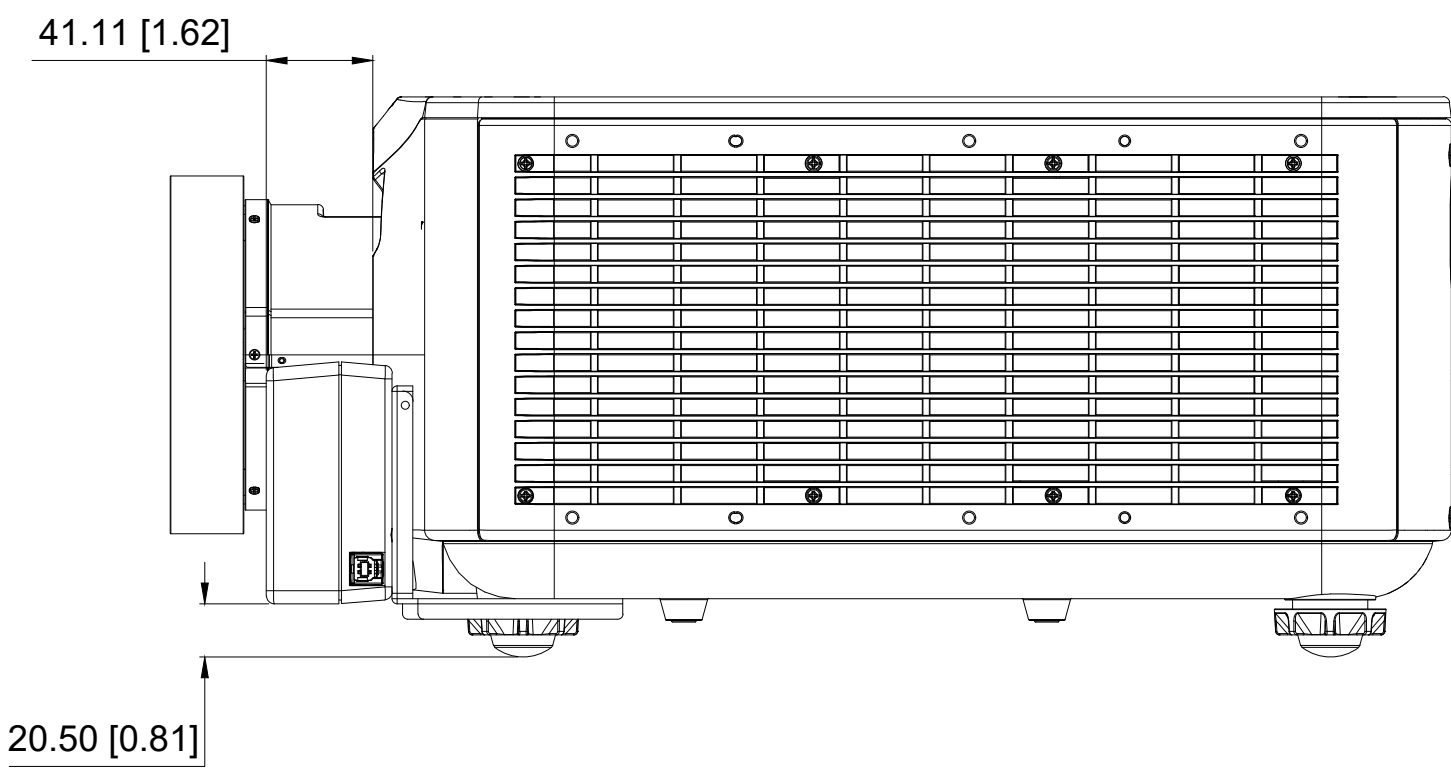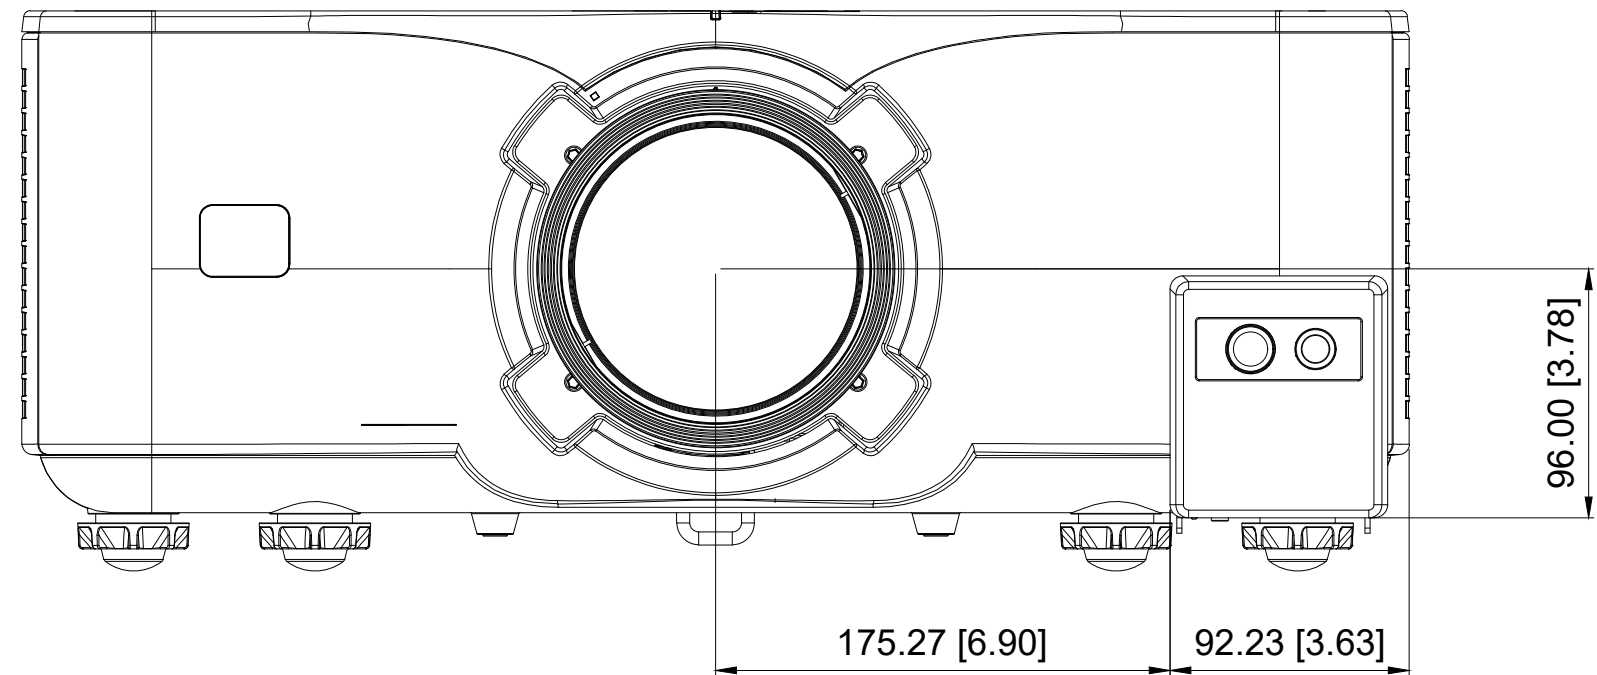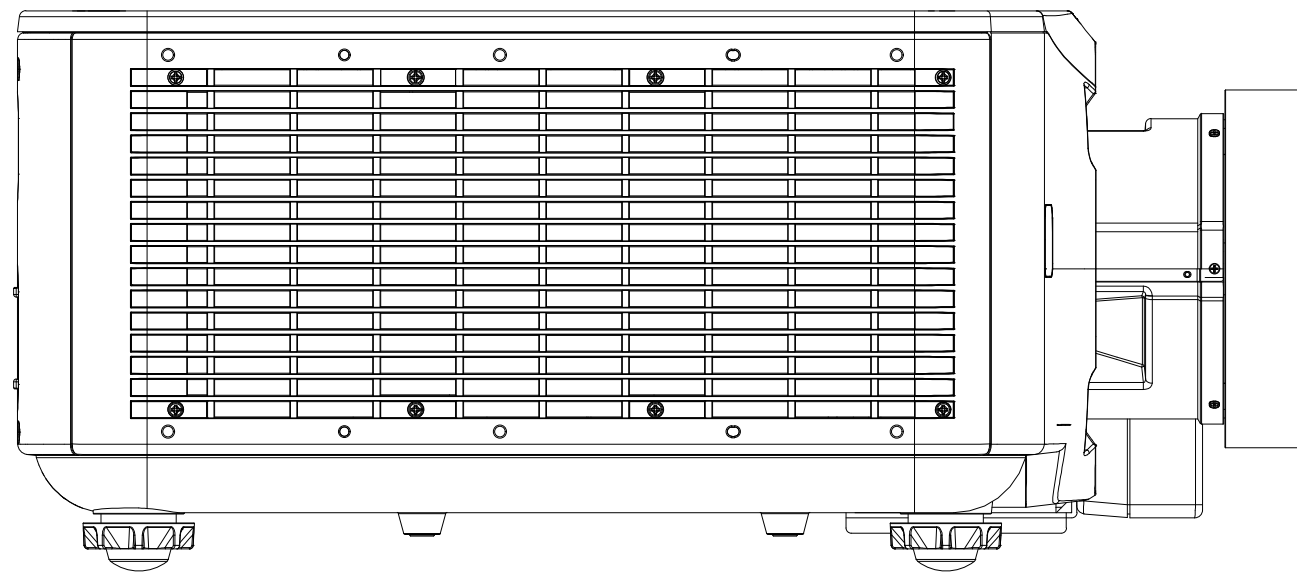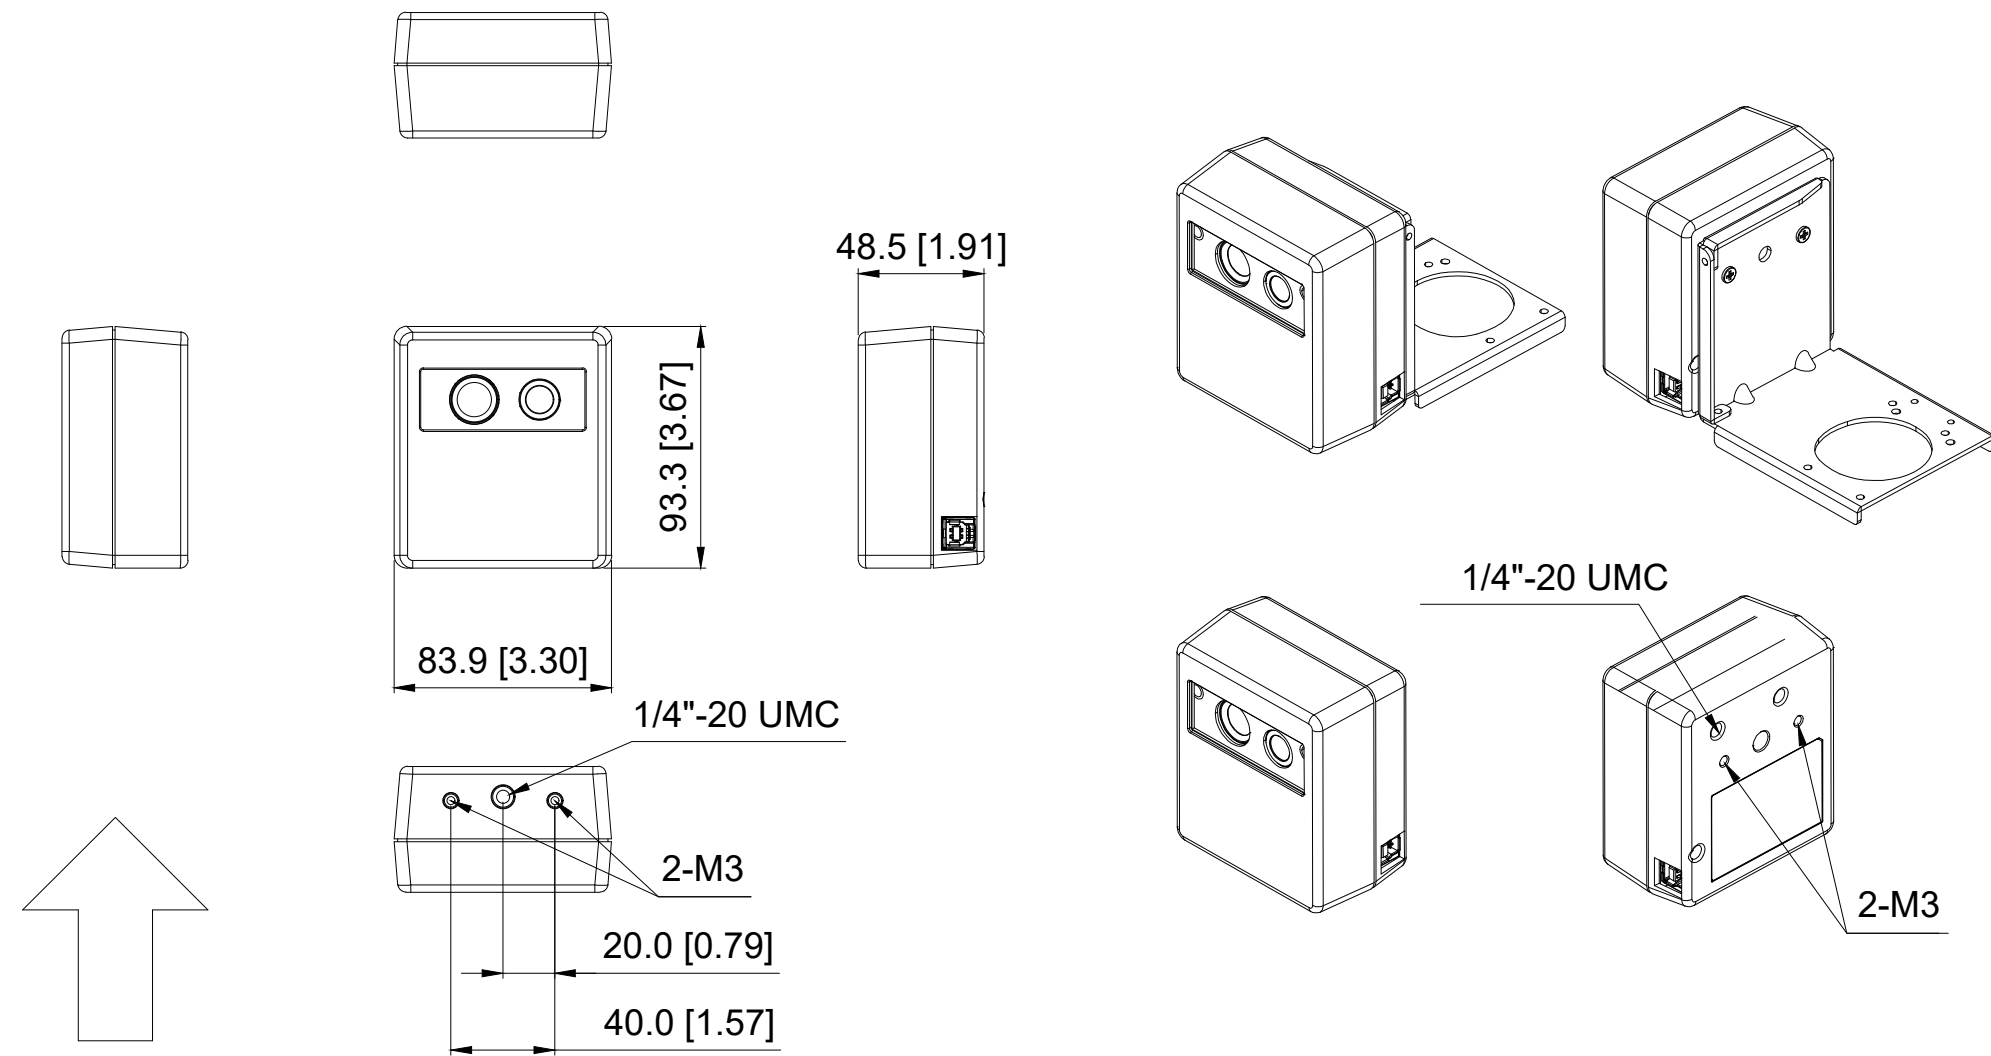

8

7

6

5

4


3

2


1

H
G
F
E
D
C
B
A


H
G
F
E
D
C
B
A

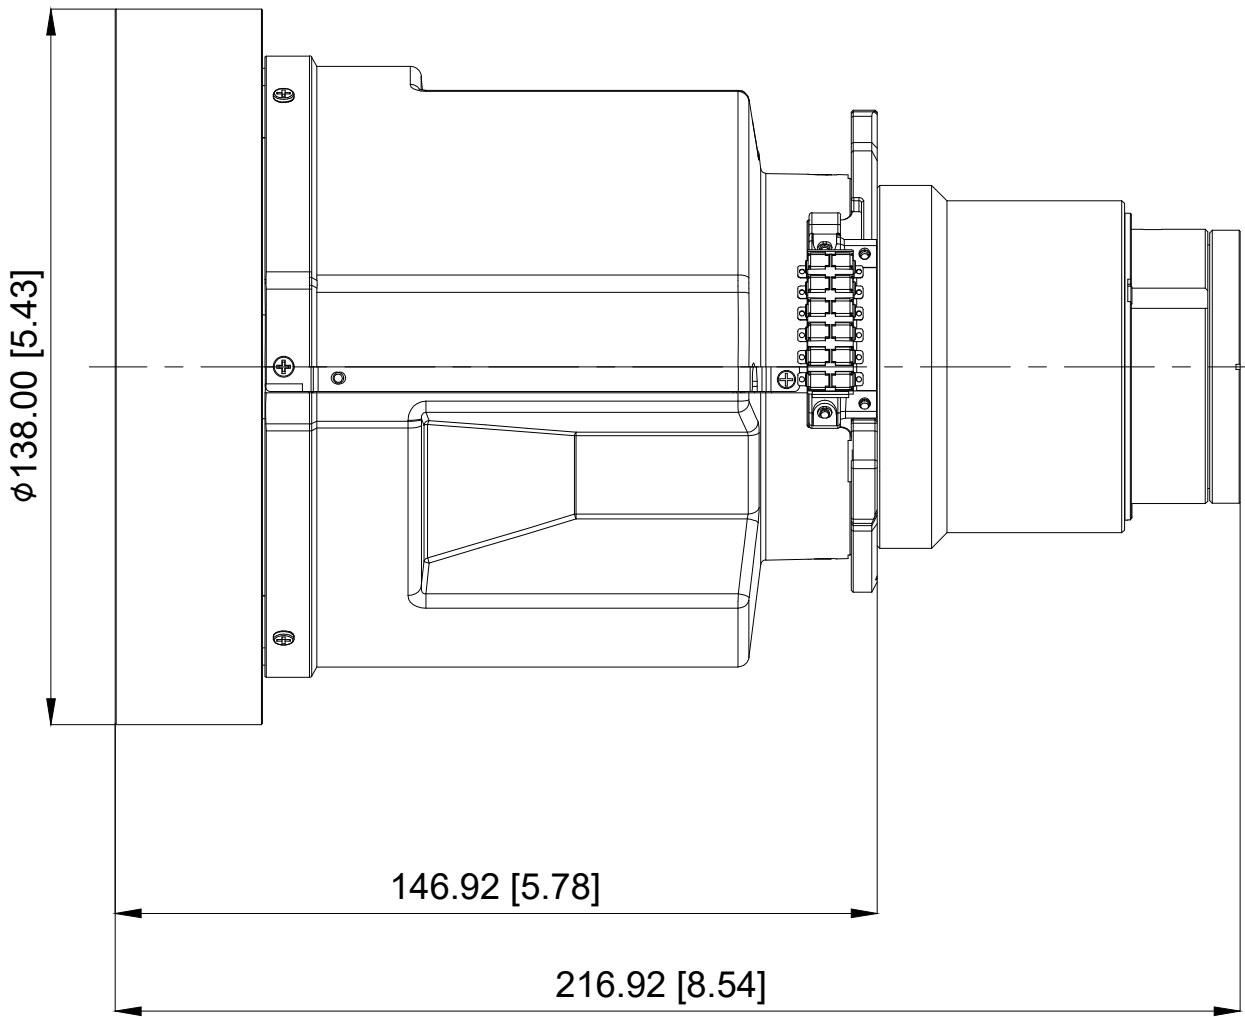


140-165103-XX

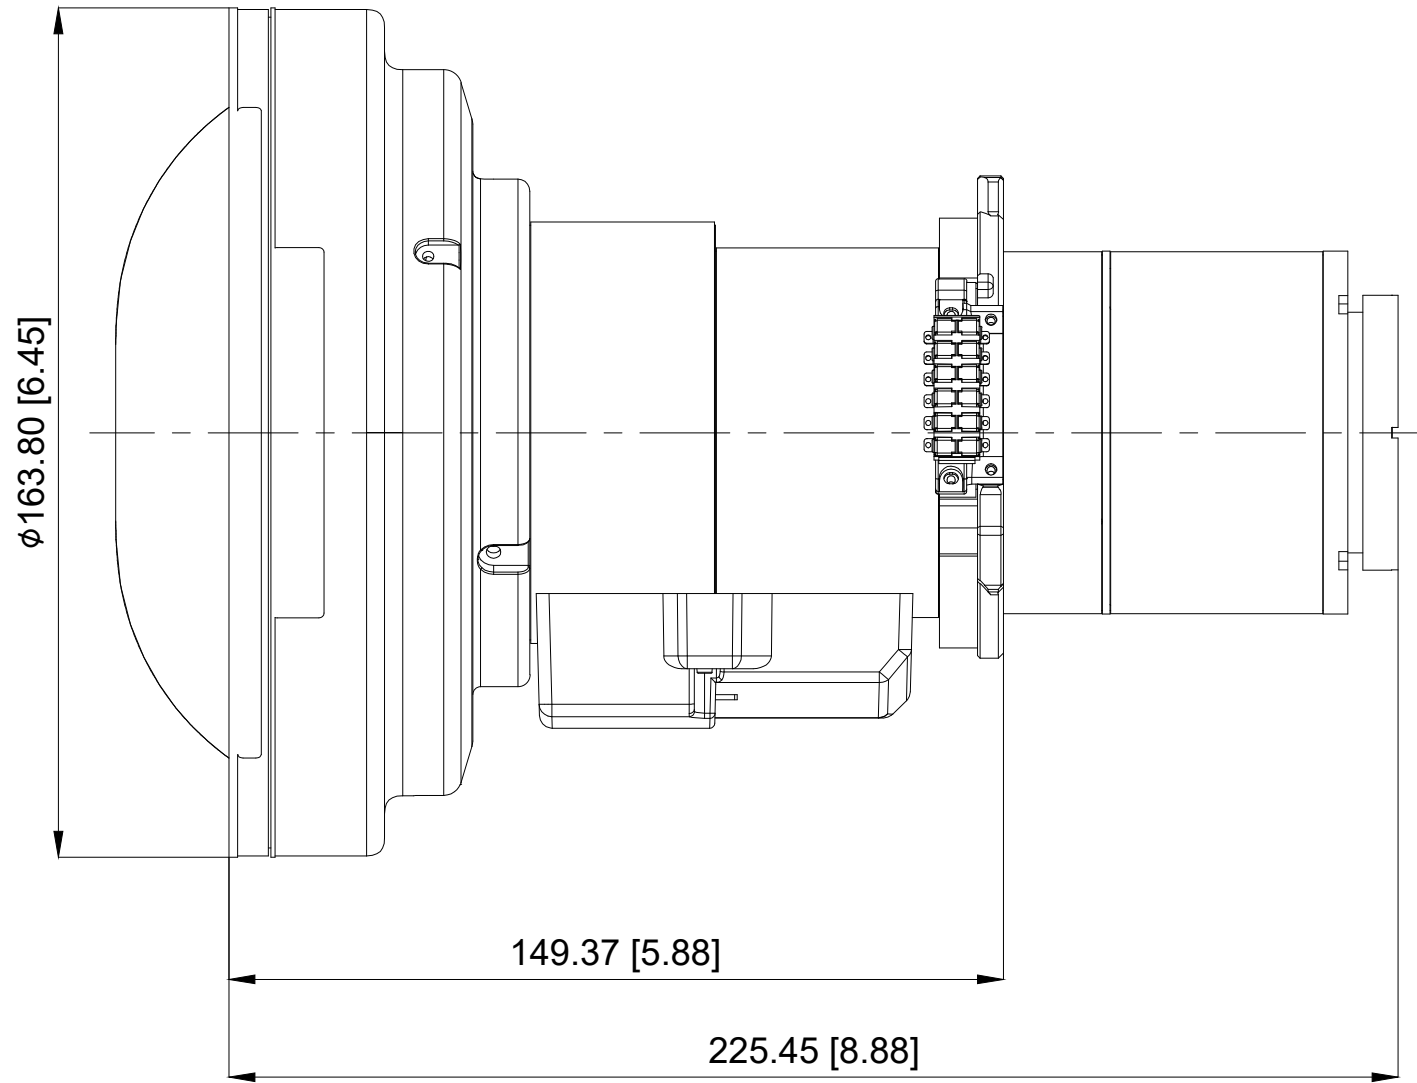

140-166104-XX

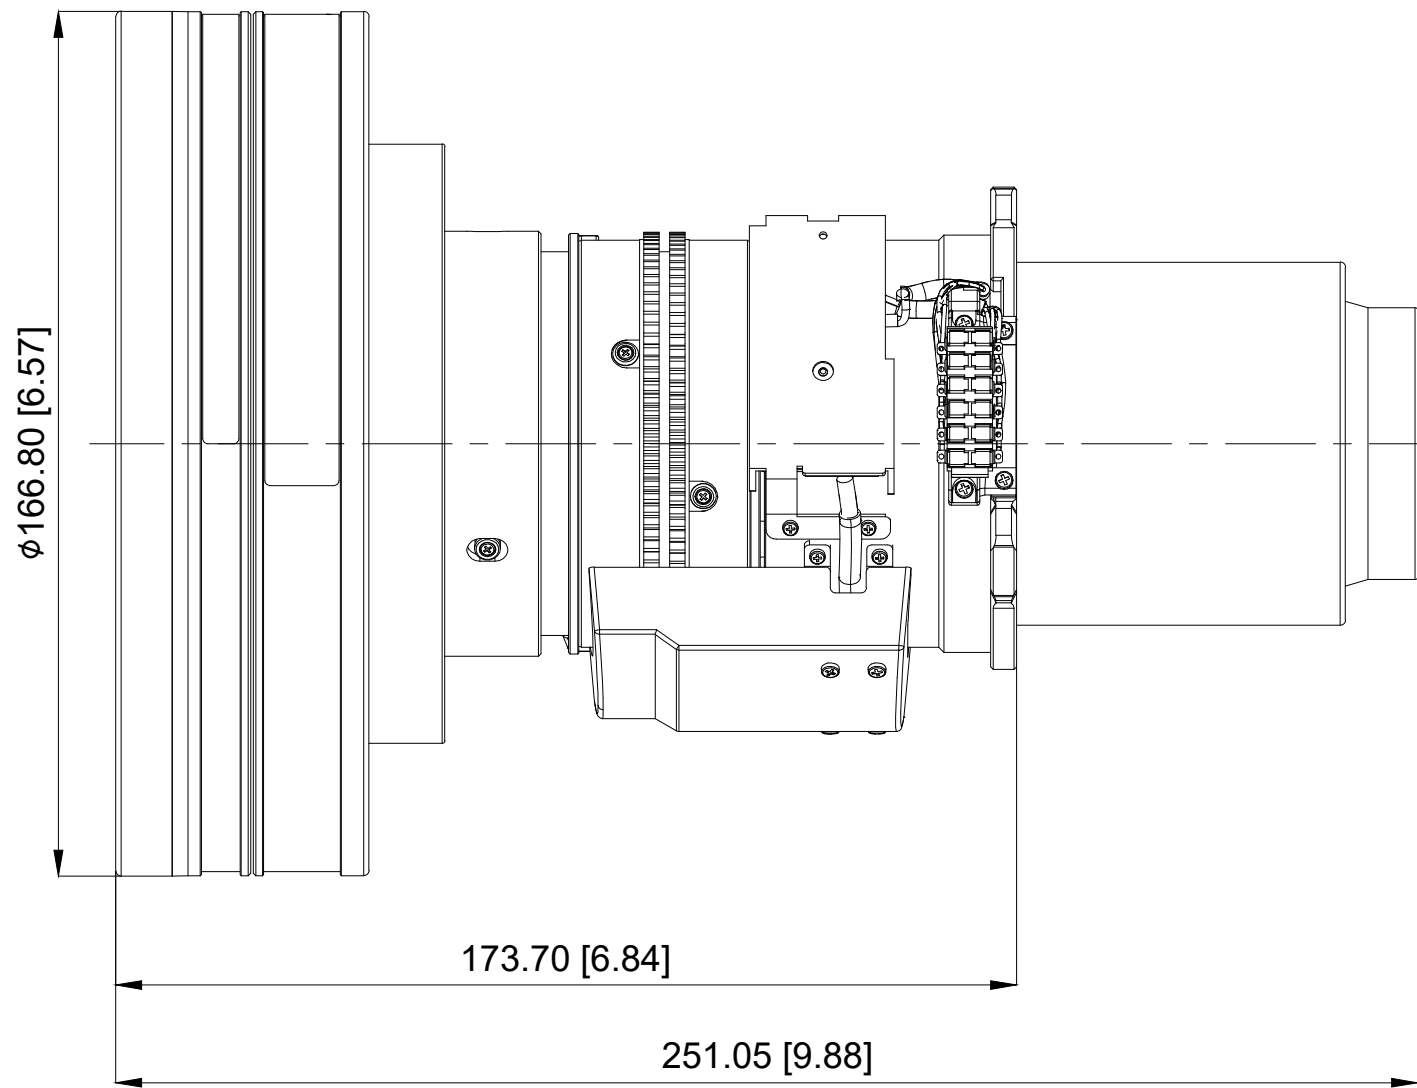

140-159106-XX

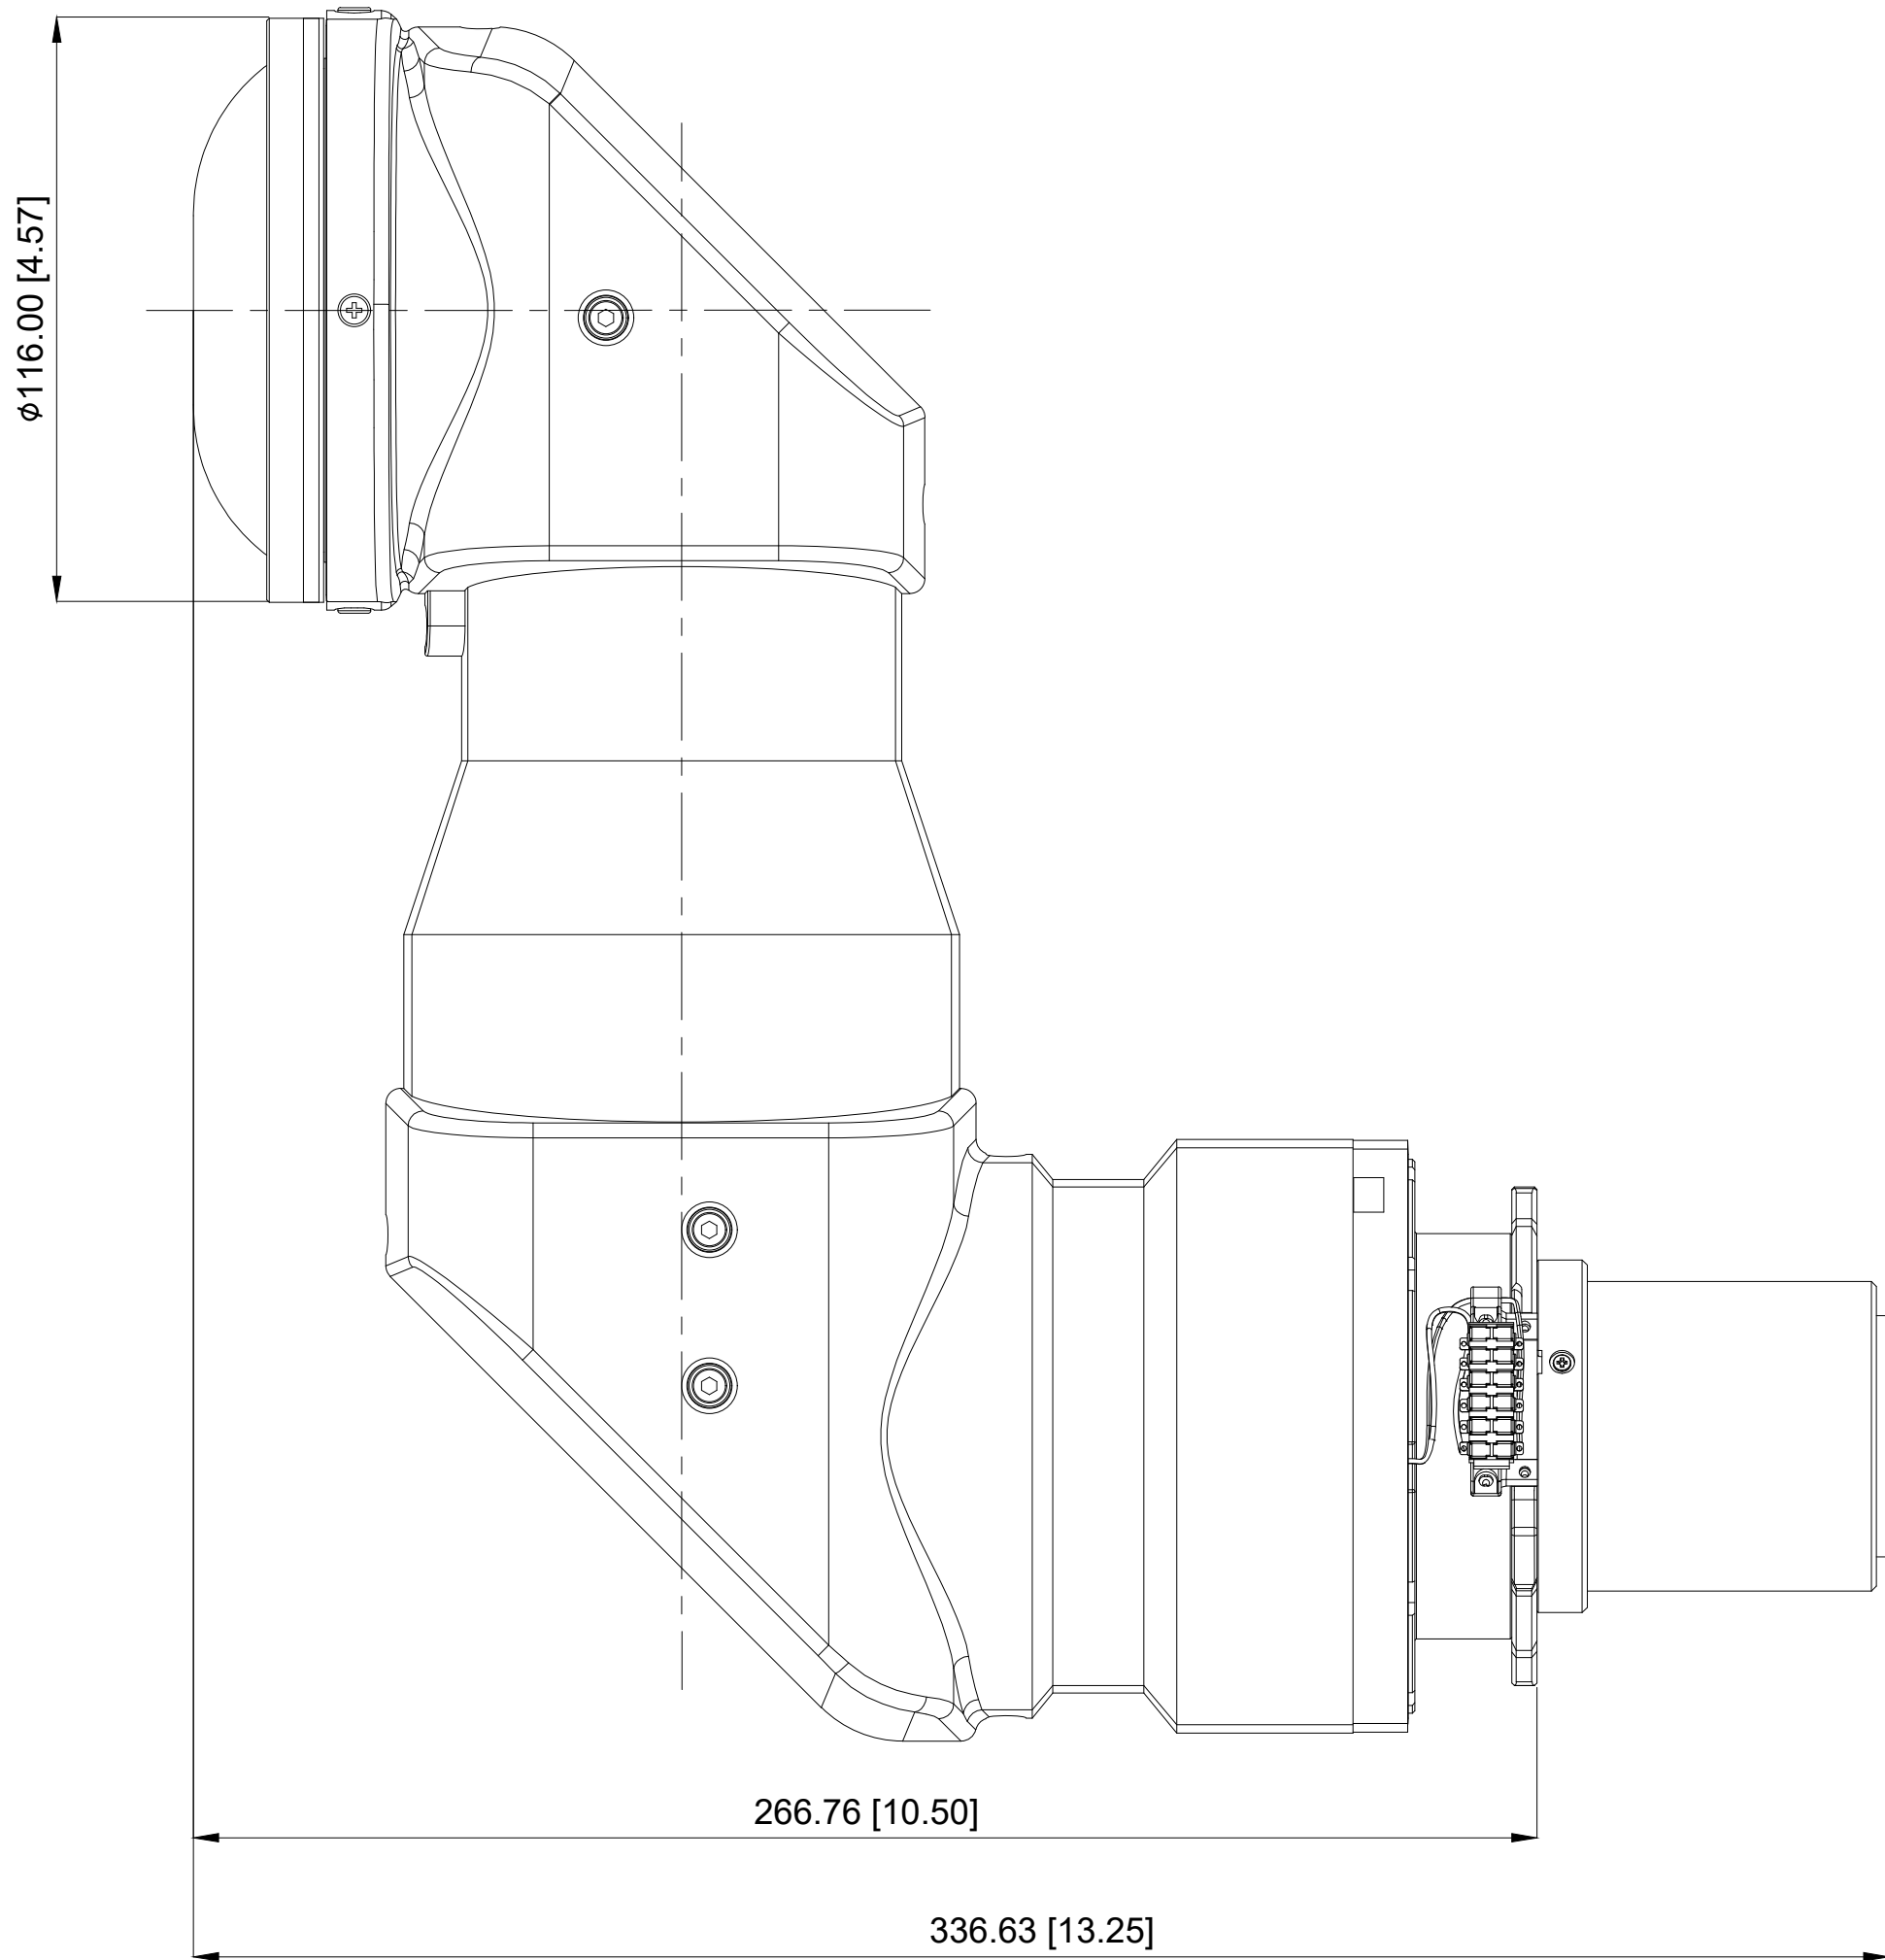

140-164102-XX

LENS P/N	UHD	NET WEIGHT	GROSS WEIGHT
140-165103-XX	Optional Lens(TR 1.25-2.0)	1.9 KG	2.4 KG
140-166104-XX	Optional Lens(TR 0.5-0.65)	2.1 KG	2.7 KG
140-159106-XX	Optional Lens(TR 0.9-1.3)	3.0KG	3.6KG
140-164102-XX	Optional Lens(TR 0.34-0.37)	3.4 KG	6.5 KG

8

7

6

5

4

3

2

1

