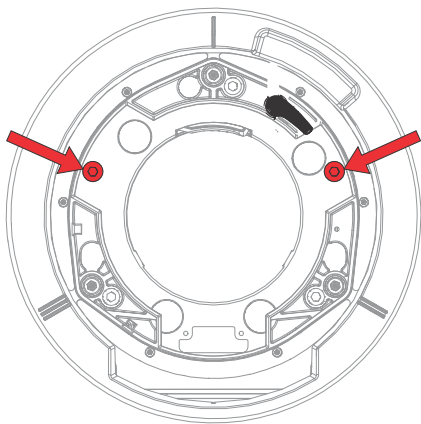

SAFETY NOTIFICATION

Crimson Lens Retaining Screws Required

For all Crimson installations, to ensure safety and stability always install the lens retaining screws.

- If the lens flange has retaining screws, hand tighten the attached screws.
- If the lens flange does not have retaining screws, you must use the lens retaining screws provided in the Screw Safety Lens service kit (P/N: 003-003922-XX). Align the holes in the lens mount and use the 5mm hex driver to fasten the red security screws.



Affected products

The following products are affected:

- Crimson HD25
- Crimson WU25
- Mirage HD25
- Mirage WU25

Technical support

Technical support for Christie products is available at:

- North and South America: +1-800-221-8025 or Support.Americas@christiedigital.com
- Europe, Middle East, and Africa: +44 (0) 1189 778111 or Support.EMEA@christiedigital.com
- Asia Pacific: +65 6877-8737 or Support.APAC@christiedigital.com