

Christie FHD551-W

Advertising/digital signage
Design and architecture
Digital out-of-home
Events and large venues

Public display
Rental and staging
Retail spaces
Transportation



Take your message outside with brilliant visuals

The Christie® WeatherAll FHD551-W LCD outdoor display allows you to extend your reach to engage, inform and persuade your audience like never before.


The FHD551-W is the ideal display solution for an outdoor setting, or an active public space such as a pool or recreational area. Fully weatherproof, the FHD551-W is protected by impact- and scratch-resistant bonded glass, giving you an industry-rated display (IP56/NEMA 4) that can be deployed in virtually any environment with complete peace of mind. The high brightness and contrast ratio of the FHD551-W provide pristine visuals so your message will be brilliantly displayed.

The Christie FHD551-W is a sleek, high-definition 55-inch display with integrated high-fidelity speakers, a cooling and filtration system, and several connection options, ensuring seamless integration and trouble-free operation. The combination of this professional-grade, all-in-one solution with Christie's industry-renowned comprehensive support and service makes the FHD551-W the best choice for your outdoor LCD display.




CHRISTIE®

Christie FHD551-W			
Display	screen size (diagonal)	• 55" • 54.6" (138.7cm) active screen size	
	weather rating (IP & NEMA)	• IP 56 • NEMA 4	
	native resolution	• 1920 x 1080 (16:9)	
	technology	• Professional-grade LED Edge Lit LCD with optical bonding	
	response time (typ.)	• 6.5ms (GtoG)	
	brightness & contrast ratio	• 700 nits (cd/m ²) typical ¹ • 4000:1 ² (full on/off)	
	viewing angle	• 178°/178° (horizontal/vertical)	
	refresh rate	• 50/60Hz	
	display orientation	• Landscape or portrait capable	
	display colors	• 10-bit • 1.07 billion colors	
	horizontal frequency	• 15 ~ 94kHz (digital) • 23 ~ 92kHz (analog)	
	vertical frequency	• 23 ~ 85kHz (digital) • 49 ~ 86kHz (analog)	
	inputs	• RS-232c (D-Sub 9-pin) • Component (RCA) • Component audio (RCA L/R) S-Video • Composite video (RCA)	
• Audio in 3.5mini • Infrared extender (3.5 mini jack)			
• PC audio in (3.5 mini jack) • VGA (D-Sub 15-pin)			
outputs	• DVI-D (HDCP compliant) • HDMI x 2 • DisplayPort		
	• Audio out (3.5 mini jack)		
Audio	speakers	• Integrated and weatherproof 4Ω/10W x 2	
Power	power requirements	• 100-240 VAC • 4A • 50-60Hz	
	panel power consumption	• 265W maximum • 175W typical • ≤ 0.5W standby ³	
Environmental	operating environment	• -4~114°F (-20~45°C) • Humidity <95%	
	storage environment	• -22~140°F (-30~60°C)	
Physical	Dimensions (WxHxD)	Weight	
	LCD panel no mount	• 51.2 x 30.4 x 4.8" (1300.6 x 771.4 x 122mm)	• Net 121lbs (55kg)
	shipping dimensions – box, packaging & accessories	• 58.9 x 36.8 x 10.2" (1495 x 935 x 258mm)	• Gross 132lbs (60kg)
	panel mount locations	• VESA standard (WxH) 15.7 x 7.9" (400 x 200mm)	
Features	<ul style="list-style-type: none"> • Optically bonded glass LCD • Landscape or portrait orientation • DACS cooling and filtration system • Winter mode option • Plug-and-Play (DDC2B) • Image Retention Frame Motion (IRFM) mode • Auto scan source selection • Aspect-ratio control Zoom • Picture-in-Picture (PIP) • OSD Key lockout 		
Regulatory approvals	<ul style="list-style-type: none"> • FCC, CE (EU) • TUV (EU) • GoST-R (Russia) • cTUVus (USA & Canada) • VCCI (Japan) • CCC (China) • KC (Korea) • C-Tick (Australia & New Zealand) • NOM-NYCE (Mexico) • Saudi Arabia • South Africa • IRAM (Argentina) • UKR-Sepro (Ukraine) • Kuwait 		
Limited warranty	• Three years parts and labor limited warranty		

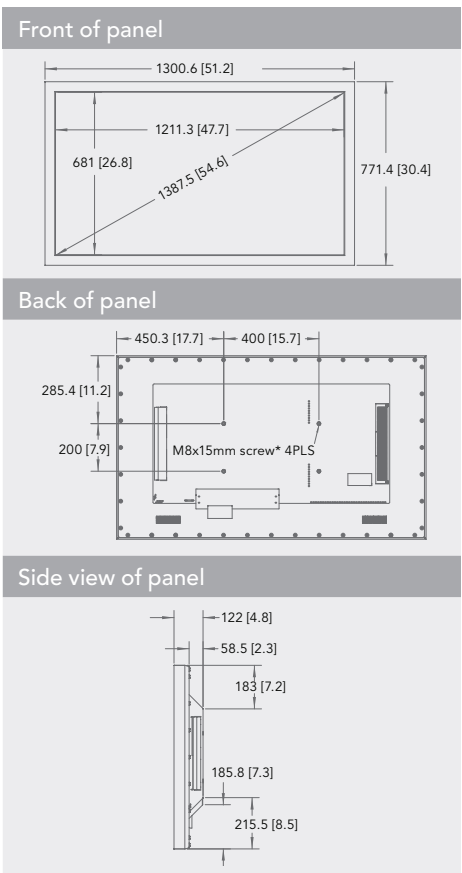


¹ The display brightness specified is measured prior to the adhesion of optically-bonded glass overtop the display.
² The contrast ratio specified is measured prior to the adhesion of optically-bonded glass overtop the display.
³ Standby energy usage >.5W standby when in Winter Mode.


Conventional plastic/glass cover

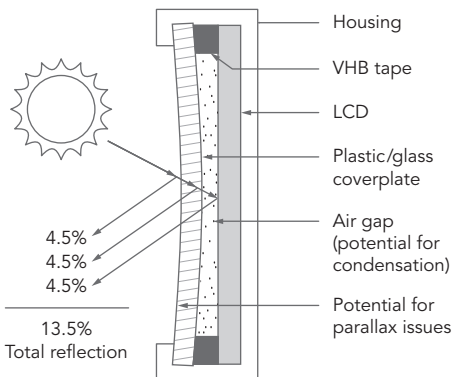

Cover glass optically bonded to LCD

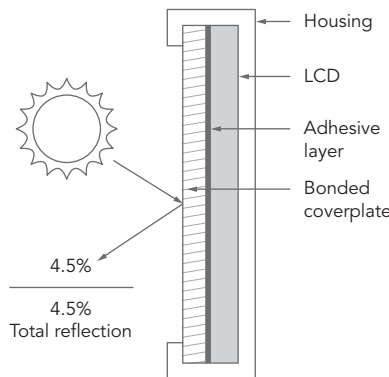

IP56 protection

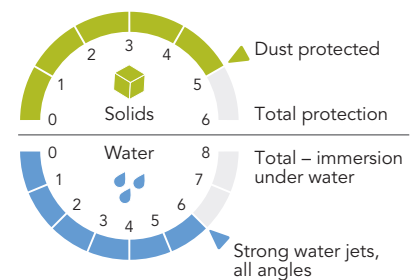

Corporate offices

Christie Digital Systems USA, Inc
 USA – Cypress
 PH: 714 236 8610

Christie Digital Systems Canada Inc.
 Canada – Kitchener
 PH: 519 744 8005

EMEA offices

United Kingdom
 Branch & EMEA
 Head Office
 ViewPoint
 200 Ashville Way
 Wokingham
 Berkshire, U.K.
 RG41 2PL
 PH: +44 (0) 118 977 8000

Africa
 Branch Office
 PH: +27 (0)11 510 0094

Eastern Europe
 Representative Office
 PH: +36 (0)1 47 48 100

France
 Branch Office
 PH: +33 (0) 1 41 21 44 04

Germany
 Branch Office
 PH: +49 2161 664540

Middle East
 Branch Office
 PH: +971 (0) 4 320 6688

Spain
 Branch Office
 PH: +34 91 633 9990

Italy
 Independent Sales Consultant Office
 PH: +39 (0) 2 9902 1161

Russia
 Independent Sales Consultant Office
 PH: +7 (495) 930-8961



For the most current specification information, please visit www.christieemea.com

Copyright 2014 Christie Digital Systems USA, Inc. All rights reserved. All brand names and product names are trademarks, registered trademarks or tradenames of their respective holders. Christie Digital Systems Canada Inc.'s management system is registered to ISO 9001 and ISO 14001. Performance specifications are typical. Due to constant research, specifications are subject to change without notice.
 CHR13637_EN_JAN14

CHRISTIE®