

# J Series

3D mapping  
Amusement  
Arenas/Stadiums  
Broadcast  
Corporate

Energy  
Events/Large venues  
Government  
Higher education  
Home theater

Houses of worship  
Manufacturing  
Medical training  
Scientific research  
And more...



PICTURE BY  
**DLP**  
TEXAS INSTRUMENTS

Designed with your image in mind.

**CHRISTIE**<sup>®</sup>



- ▲ 6850-22,000 center lumens  
SXGA+ (1400 x 1050)  
HD (1920 x 1080)  
WUXGA (1920 x 1200)
- ◀ View the Christie J Series video

# Reliability is in its genes. Performance is its genius.



Superior performance, high brightness and crisp, clear images – these are what you expect in a Christie® 3-chip DLP® projector. We've taken these features, added even more, and wrapped them up in the most compact chassis in its class. Welcome to the Christie J Series. This series of Christie projectors couples the benefits of Xenon illumination – for the most natural color accuracy and stability – with the next level of technology, performance and flexibility.

Creating visually compelling displays is paramount to your success. That's our business too, so we've made higher brightness, Christie Twist™, 3D upgradability and flexibility standard in this series. You'll see we've upgraded our existing 3-chip DLP platform with the features and functionality that you rely on to share, collaborate and create.

We've kept your bottom line in mind, as well. We've made sure that this new series can use existing lenses<sup>1</sup>, lamps, input cards<sup>2</sup>, stacking hardware and other Christie accessories.

The Christie J Series includes 2D and Mirage (3D-capable) models that are available in a broad range of brightness levels and resolutions. Whether your application is in broadcast, energy, entertainment, government, higher education, houses of worship, live events, manufacturing or medical, choose the model that fits your needs and budget, and know that all this is backed by Christie's three-year warranty and our industry-leading service and support.

<sup>1,2</sup> See note on page 12.

# Up to 22,000 lumens of Xenon brightness

You've told us how much you love Xenon technology and we think we know why. The continuous light quality, stable color temperature, excellent color reproduction and relatively little color shift give you eye-catching live displays, easily combat other light sources in the room and still wow your audiences time and again. That's reliability you can trust.

Available in brightness levels ranging from 8500 ANSI (9350 center) lumens through 20,000 ANSI (22,000 center) lumens and three resolutions, SXGA+ (1400 x 1050), HD (1920 x 1080) and WUXGA (1920 x 1200), each model offers more brightness per pound than the competition and ensures that your content can be shown in its native resolution, without scaling.

## Advantages of Xenon lamps

Provides the highest level of on-screen performance, both for brightness and color accuracy


The spectrum of a Xenon lamp results in relatively little color shift over time

A Xenon lamp emits a continuous wavelength spectrum of light throughout the visible range (roughly 400 nm to 700 nm), which approximates the neutral white color of natural daylight

Reaches full brightness in far less time than other lamp technologies

Great for illuminating very large screens or high ambient environments

Xenon lamps have the best color rendering index (CRI) of any lamp technology out there

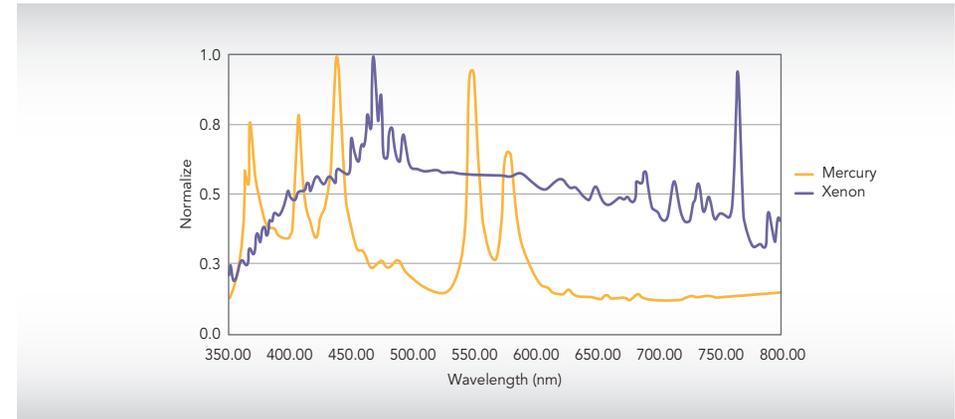

▲ Xenon vs high pressure Mercury lamps

## Christie J Series models<sup>1</sup>

Model	Center lumens	Resolution
Christie DS+10K-J	9350	SXGA+
Roadster S+22K-J	22,000	SXGA+
Roadster HD14K-J	13,200	HD
Roadster HD16K-J	15,400	HD
Roadster HD20K-J	20,000	HD
Roadster WU20K-J	20,000	WUXGA


## Only Xenon in its class

Christie® is the only manufacturer to offer Xenon models that provide less than 10,000 lumens. The 1.0kW and 1.2kW Cermax® lamps make it possible for us to provide models in the less than 10,000-lumen category.

The Christie J Series offers the best color performance of any product in this market space.

## Yellow notch filter

Available as an optional feature for all Christie J Series models, the yellow notch filter is an optical color management device that emulates film-like color. It creates greater separation between the primary colors, RGB, resulting in a larger available color gamut for better reproduction of skin tones and richer color depth and saturation. This is especially apparent in green and red tones, resulting in a more life-like display on the screen. This color filter must be factory installed at time of purchase.

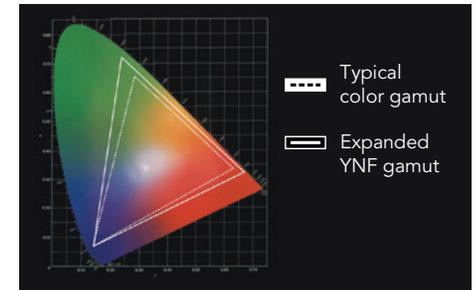

▲ Optional yellow notch filter is ideal for video applications




▲ Standard color gamut



▲ Expanded color gamut

<sup>1</sup> Lumens values are for projectors that do not have yellow notch filter installed.

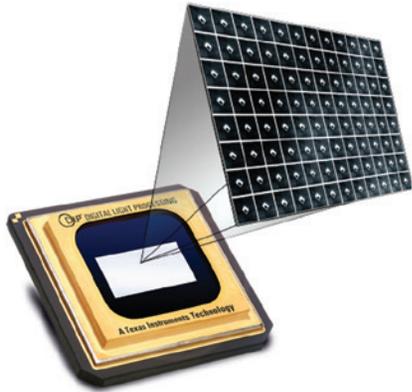

▲ 3-chip DLP technology

## Crisp, clean images time and again

There are many factors that determine the quality of an image – 3-chip DLP® technology, high-quality optics and world-class 10-bit image processing ensure you display the best image. You need all of these elements working together if you're going to present clear, detailed, true-to-life images and information. The Christie J Series encompasses all of this and more. We've also added a dust-sealed engine and optics to help protect your investment and keep maintenance costs low. Liquid cooling and a thermal-feedback system keep your projector at a temperature that ensures optimal performance.

### Image quality

Based on 3-chip DLP technology, high-quality optics and world-class 10-bit image processing, the Christie J Series delivers:

- High brightness
- Excellent color
- Excellent uniformity
- High reliability (>100,000 hours MTBF for DMDs)
- High contrast
- Excellent fill ratio




### Dust-sealed engine

Christie J Series projectors are designed with dust-sealed engines and optics. Since dust and dirt cannot affect the system, image quality is maintained and maintenance costs are lower. Optional fog juice filters are available for projectors exposed to harsh environments.

### Liquid cooling

Christie Roadster and Christie Mirage models (equipped with a 2.0kW, 2.4kW or 3.0kW lamp) include a thermal-feedback system and a liquid-cooling module for the DMDs to continually maintain the projector's temperatures in the correct operating range. This improves the overall DMD performance and reliability when used in harsh environments. It also enables the projector to operate in temperatures up to 104°F (40°C) allowing for use in less than ideal conditions.

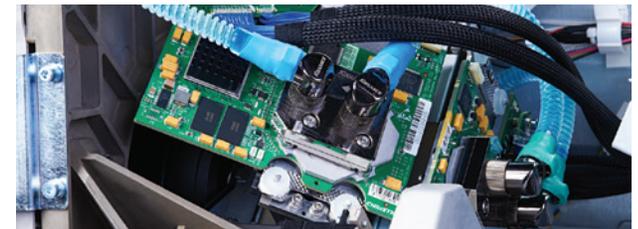

- ▲ Liquid cooling
- ◀ Solomon Victory Theater  
National World War II Museum,  
New Orleans, LA

# Taking performance to a new level

We've embedded powerful features such as Christie® Twist™ and an Intelligent Lens System (ILS™), edge blending and color matching capabilities to ensure that setup and maintenance of your displays are repeatable, quick and easy. Monitoring and controlling your displays from a distance are made simple with our ChristieNET™ web interface. And, when you're close to your projector our intuitive LCD keypad gives straightforward, easy access to manage your display. Additional hardware or software is no longer required; making your life easier.

The Christie J Series platform supports existing stacking hardware, lenses<sup>1</sup>, input cards<sup>2</sup> and other Christie accessories (e.g. portrait lens adapter); as well, the new lamp modules for the Christie J Series can be used with legacy Xenon projector models. This keeps money in your pocket and your displays amazing audiences.


<sup>1,2</sup> See note on page 12.



▲ Grammy award winner Alicia Keys' "As I Am" world tour

## Embedded Christie Twist

Standard in all Christie J Series models, Christie Twist enables seamless edge blending of multiple curved images faster and more easily than through traditional, manual methods. Controlled by an easy-to-use GUI, you can expertly control and edge blend or stack multiple curved images. As well, images can be warped to fit virtually any dimension or shape display. Embedded Christie Twist ensures that all J Series projectors work with value-added accessories, such as Christie AutoStack™.

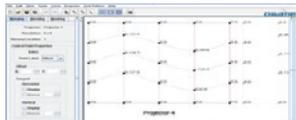

▲ Easy-to-use GUI



▲ Easy-to-use GUI



▲ Image on curved screen - without blending



▲ Curved screen - with blending


"For a recent show, I needed to project onto a multi-dimensional stage with two double-stacked Christie Roadster projectors. I used one PC-based video server per projector to be able to fit the predesigned image and content onto the stage surface, as well as geometrical adjustments to each image independently in order to converge them all.

If Christie Twist had been installed in the projectors, I could have used two computers instead of four, had less image lag, and it would have been cheaper and faster to get the job done. I now see that it makes complete sense to have Christie Twist on every projector used in projection mapping displays because it makes set up easier, reduces the number of the video servers needed for the job and decreases the failure points of the whole system."

Bart Kresa, BARTKRESA design


## Intelligent Lens System (ILS)

The ILS automatically recognizes and calibrates a lens when it is installed. Stepper motor-based encoding ensures that motor drift does not occur, as typically found with DC encoded motors, providing accurate and repeatable recall of all lens offset, zoom and focus positions. This lens system ensures that the images adjust to optimize screen coverage and maintain alignment in applications with moving screens or variable aspect ratios.

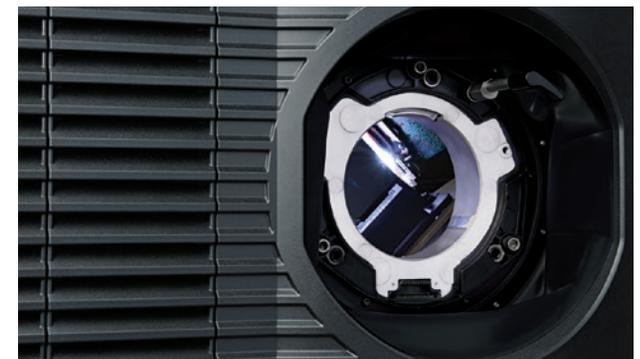

## ChristieNET web interface and Virtual On-Screen Display (OSD)


ChristieNET enables users to access all projector menus and controls through a web interface without disrupting the live presentation. This allows for real-time adjustments and monitoring of each projector on the network – regardless of geographic location. It's easy to set up and maintain the projector system remotely. You don't need to see the screen to set up the system, making it ideal for applications where the screen is rigged or far away. The menus do not show on the projector screen so it won't be a distraction during live performances. A new status screen shows alarms, lamp info, or any system information. The easy-to-use interface lets you upload, backup and restore settings, as well as designate permission-based users.

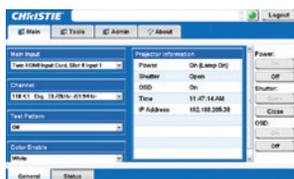

▲ Main page controls and information



▲ Virtual On Screen Display (OSD): access full menu structure, remotely

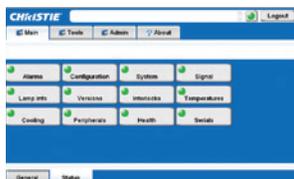

▲ Status and diagnostics: display alarm events for quick projector monitoring and diagnosis



▲ Admin screen includes upload, backup, restore and more


## Embedded edge blending and color matching

Advanced blending capabilities and Comprehensive Color Adjustment (CCA™) ensure digitally accurate color matching and uniformity across multi-screen blended or tiled images.



Overlapping image edges

▲ Without edge blending    ▲ With edge blending

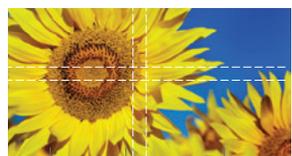

Color matching    Edge blending

## LiteLOC

The LiteLOC™ feature automatically manages your display's brightness levels over time so that you can match the brightness of a multiple projector system in tiled or blended arrays. This feedback system continuously monitors lamp brightness so that, as the lamp goes through its natural brightness decay, the system increases the lamp power in order to maintain consistent brightness.



▲ Without Lite LOC



▲ With Lite LOC

## Wireless projection control

Christie wireless projector control brings projection management to your fingertips – literally – with wireless projector control applications for Apple® iOS and Android-based mobile digital devices.

The Christie InControl app lets you control Christie projectors directly from your iPhone, iPad and iPod; The Christie Virtual Remote app offers the ability to manage Christie projectors using your Android-based mobile device.



The two applications are designed to control any Christie J Series and M Series projectors. Each projector can be controlled individually, or grouped together and controlled simultaneously. The Christie InControl app is available as a free download from the Apple App Store. The Christie Virtual Remote is available as a free download from the Google Play store.

## LCD keypad

This easy-to-use LCD keypad includes:

Contextual menus provide a fully-featured, intuitive interface that removes the need for a cluttered keypad

Large, four line LCD display

Adjustable brightness and timed LCD off mode

Intuitive, user-friendly keypad design that lights up when features are active

Active keys are color-coded amber to indicate that selections will result in changes visible to the audience

## Christie understands 3D


Today, a wide range of applications make use of 3D technology to provide a host of benefits - from decreased costs through virtual design prototyping, increased effectiveness while exploring oil deposits and wells, never-seen-before perspectives designed for medical and scientific research programs, or having fun at a theme park. But it's not just any 3D technology that has been used - only Christie® has been there since the beginning. A true pioneer in the development of 3D projection technology, only Christie can offer the expertise required for today's emerging 3D display applications.

Our Christie Mirage J Series of 3D-capable projectors offers complete compatibility with today's 3D standards. They offer brightness levels ranging from 6200 ANSI (6850 center) lumens through 20,000 ANSI (22,000 center) lumens and contrast ratios that include SXGA+ (4:3), HD (16:9) and WUXGA (16:10). The most compact 3-chip DLP® active stereo projectors in their class, this series of projectors delivers crisp, detailed images with excellent color and brightness.

These projectors offer complete compatibility with today's 3D home entertainment requirements and are ready for Blu-ray™ 3D video, PS3 and other gaming consoles, meeting the mandatory 3D spec for HDMI v1.4a. To ensure your 3D solution is complete, Christie also offers a range of accessories that include: 3D glasses (active and passive), emitters and modulators.

Powered by dual image processing, the Christie Mirage J Series displays full resolution at a native frame rate up to 120Hz. Two standard Dual link DVI input cards support 330 MHz bandwidth for full resolution Dual input 3D.

For the ultimate home theater including Blu-ray 3D video content, the Christie Mirage J Series uses triple flash to provide the best images possible, no matter how fast motion your content might be. You can count on Christie to ensure the highest image quality and a comfortable theater-like viewing experience.

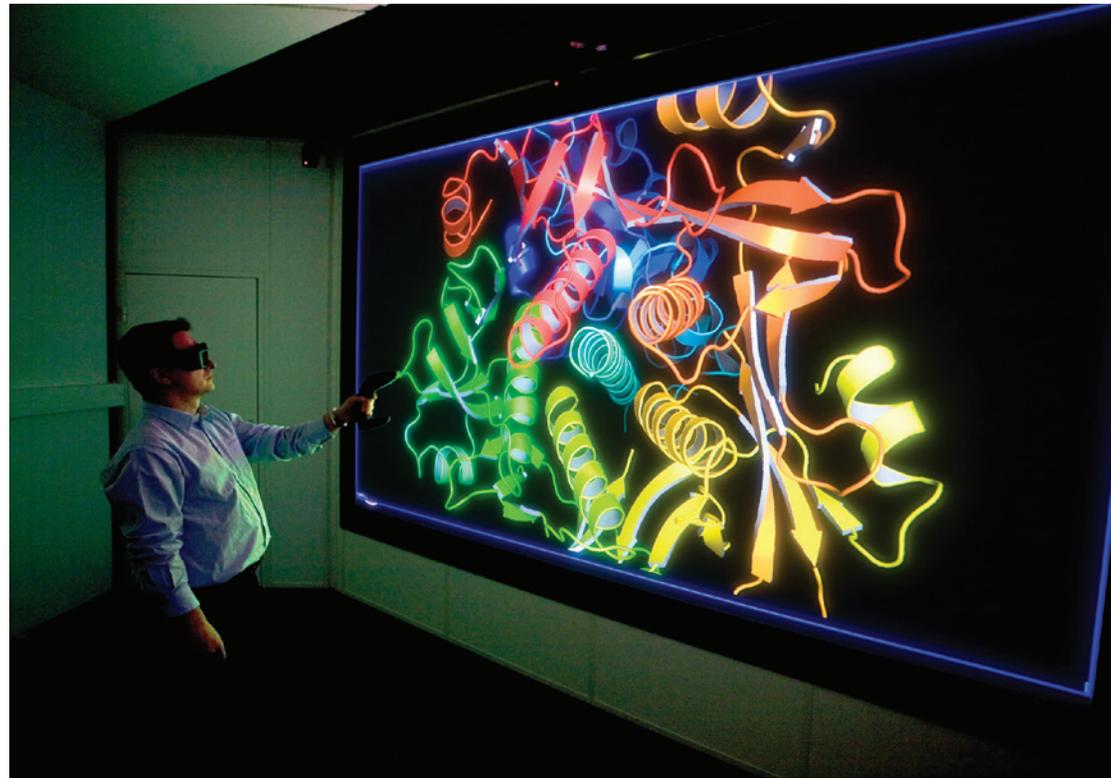

▲ University of Reims Champagne-Ardenne (URCA), 3D display used for scientific research and development

### Christie Mirage J Series models<sup>1</sup>


Model	Center lumens	Resolution
Mirage S+22K-J	22,000	SXGA+
Mirage HD14K-J	13,200	HD
Mirage HD16K-J	15,400	HD
Mirage HD20K-J	20,000	HD
Mirage WU7K-J	6850	WUXGA
Mirage WU14K-J	13,200	WUXGA
Mirage WU20K-J	20,000	WUXGA




◀ View the Christie Mirage J Series video

<sup>1</sup> Lumens values are for projectors that do not have yellow notch filter installed.


## Active stereoscopic viewing - single projector

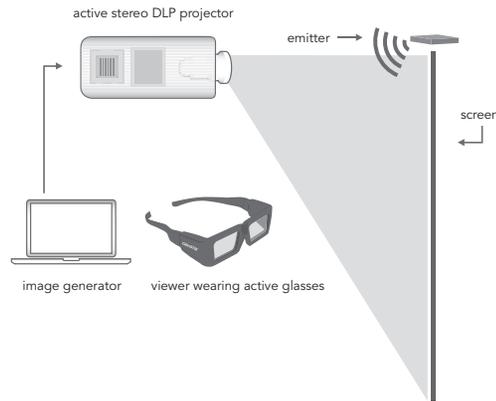

## Passive stereoscopic viewing - single projector

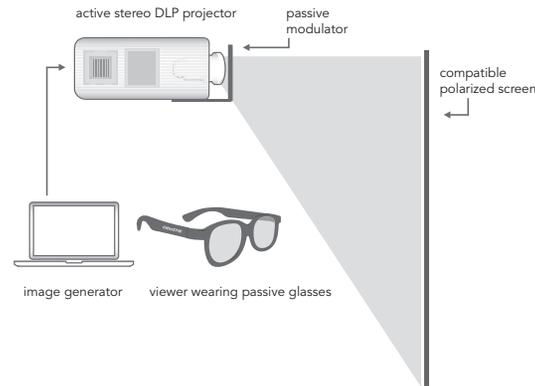

## Active stereoscopic viewing - multiple projectors

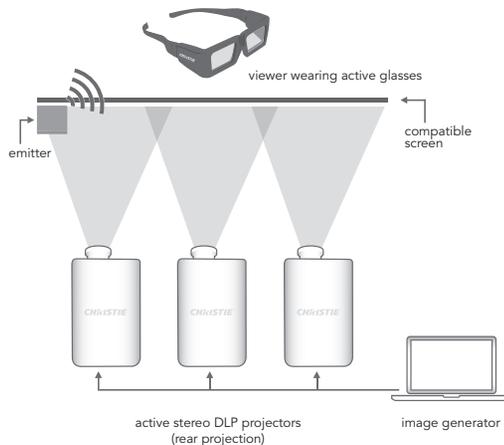

## Active stereoscopic viewing

Active stereoscopic displays provide the best 3D imagery available today. Active stereo is typically used for applications where life-like color reproduction and finite detail are required for precise content in key decision-making applications. Offering the most detailed and life-like 3D images, the Christie Mirage J Series uses Xenon-based illumination for the best color reproduction and can be used with Christie Mirage 3D active stereoscopic accessories, including an emitter and LCD shutter glasses. For applications that require a larger display for 1:1 scale visuals, you can use multiple Christie Mirage J Series projectors blended into a single, larger display.

# Christie Mirage J Series

In addition to offering the highest brightness and a variety of resolutions while operating at a full 120Hz, the Christie Mirage J Series is flexible in terms of its input capabilities, and the type of stereo you wish to utilize. The Christie Mirage J Series creates stunning 3D imagery from a single projector whether you want to run commercial-grade 3D inputs like native 60Hz per eye or the latest consumer standards like Blu-ray triple flash or broadcast side-by-side.

## Passive stereoscopic viewing

When it comes to 3D for a larger crowd, passive stereoscopic displays offer the best return on investment. Using low-cost polarized glasses that can be given away or recycled after a single use, a passive stereo display is a cost effective way to deliver quality 3D images. Combine a silver screen and Christie Mirage J Series projectors with Christie Mirage 3D accessories, including our passive modulator and circular polarized 3D glasses, and you can bring incredible eye-popping 3D to even the largest of audiences!

## Active single projector versus stacked dual projectors

Single, active 3D projection eliminates the need to stack, align and color match projectors and continually monitor and match brightness of two projectors for consistent left eye/right eye display. Typically for comparable brightness, single active 3D projection will operate with less noise, heat, physical space requirements and consumables along with fewer failure points and overall lower power consumption.

Source	Input signal type	Dual DVI input card DVI-D	VGA	HDMI	Analog BNC input card RGB/YPrPb	SDI
Data/Graphics	frame sequential - native 3D	• Range 96-120Hz (48-60Hz per eye, >165MPixels < 330M Pixels)	•	•		
		• Range 96-120Hz (48-60Hz per eye, <165MPixels)	•	•	•	•
	frame doubled <165MPixel	• Range 48-60Hz (24-30Hz per eye) doubled to 96-120Hz	•	•	•	•
	dual input 3D each input <165MPixel	• 2 input cards: 48-60Hz per eye. Two identical formats, frame-locked, passive 3D inputs are fed into the projector and frame-interleaved to create active 96-120Hz 3D	•	•	•	•
		• 1 input card: 48-60Hz per eye. Two passive 3D inputs are fed into the projector, one per eye on the same input card and frame-interleaved to create active 96-120Hz 3D			•	•
frame tripled - triple flash	• 48Hz (24Hz per eye) tripled to 144Hz	•	•	•	•	

Source	Input signal type	Dual DVI input card DVI-D	VGA	HDMI	Analog BNC input card RGB/YPrPb	SDI
Blu-ray	for movie content: <165MPixel					
	frame packing	• 1080p @ 23.98/24Hz		•		
	frame tripled - triple flash (automatically) <sup>1</sup>	• Range 48Hz (24Hz per eye) tripled to 144Hz		•		
PS3, XBOX, PC	for game content: <165MPixel					
	frame packing	• 720p @ 50 or 59.94/60Hz	•	•		
Sat/Cable, Set top box etc.	for broadcast content: <165MPixel					
	side-by-side horizontal	• 1080i @ 50 or 59.94/60Hz	•	•	•	•
		• 720p @ 50 or 59.94/60Hz	•	•	•	•
	top and bottom	• 1080p @ 23.97/24Hz	•	•	•	•
	• 720p @ 50 or 59.94/60Hz	•	•	•	•	

• = Available

## Standard 3D inputs

Whether your data content or images are being generated by a computer, a Blu-ray™ player, a gaming console, or a server - 3D content comes in a wide variety of shapes and sizes. The way that your content is distributed can have an impact on your 3D experience.

## 3D upgradable



Christie® also makes it easy to future proof your investment by being the first in the industry to offer upgrade paths for select 3-chip DLP® projectors to Mirage Series models. Whether you need 3D capability today or tomorrow, Christie has the innovation, breadth of technologies, engineering strength and the integration expertise to offer the right display solutions to fit your business needs.

	Description	Part number
3D upgrade kits	3D upgrade kit for Christie S+22K-J	132-107109-XX
	3D upgrade kit for Christie HD14K-J	132-104106-XX
	3D upgrade kit for Christie HD16K-J	132-106108-XX
	3D upgrade kit for Christie HD20K-J	132-108100-XX
	3D upgrade kit for Christie WU20K-J	132-109101-XX

<sup>1</sup> Blu-ray content is always forced to be triple flashed (144Hz output). No need to select "Triple Flash" from the menu as this is intended for DVI sources, not Blu-ray.



▲ Christie 3D active glasses



▲ Christie 3D passive glasses



▲ Emitter (active) - standard and long range



▲ Modulator (passive)

### 3D Accessories

	Description	Part number
Active stereo	Glasses - single	• 108-407102-XX
	Glasses - 10 pack	• 108-409104-XX
	Emitter - standard range	• 108-410106-01
	Emitter - long range	• 108-415101-01
Passive stereo	Glasses - single	• 108-412108-XX
	DepthQ polarization modulator	• 108-411107-XX

## Benefits of 3D

Provides perspective not possible with traditional 2D software and tools

Reduces time to market

Excites audiences ... WOW! factor

Accelerates understanding and decision making

Enables faster, more intuitive interaction with data

Promotes collaboration and focus on collective strengths

Ensures greater accuracy of concepts and designs

Removes inherent boundaries found in traditional tools

## Designed to work with you

Christie® J Series is designed with many robust features that take some of the complexities out of your job. The easy-to-use lamp insertion mechanism lets you replace the lamp yourself quickly and easily. The portrait display adapter gives you the option to create displays in portrait orientation with 1.0kW or 1.2kW models, while the Christie Roadster models have built-in portrait capabilities. Even if you have existing rigging and stacking mounts, lenses<sup>1</sup>, lamps, input cards<sup>2</sup>, stacking hardware and other Christie accessories you can use them with the Christie J Series.



▲ Optional portrait display adapter



▲ Christie Roadster models have built-in portrait capabilities



▲ Stack projectors for redundancy or additional brightness



▲ Stacking kit

### Rigging and stacking

Christie's stacking kit enables you to stack up to a maximum of three of the projectors (equipped with a 1.0kW or 1.2kW lamp) into a light-weight, sturdy frame. Customers with existing stacking mounts and hardware can use the same equipment with Christie J Series models. This means that you can effortlessly stack a Christie Roadster S+20K with a Christie Roadster S+22K-J, for example.

### Hybrid stack

The stacking frame can also connect to the integral rigging points on any Christie Roadster model for a hybrid stack with a model that uses a 1.0kW or 1.2kW lamp. Adjustable mount wheels aid in projector alignment.

### Portrait capabilities

Christie 3-chip DLP® projectors offer the flexibility to project in portrait orientation. For models using a 1.0kW or 1.2kW lamp, the portrait display adapter makes the change in orientation easy. The adapter attaches to the projector's lens and enables you to project the image in portrait orientation instead of landscape. Christie Roadster models have built-in portrait capabilities and do not require the portrait display adapter.

### Setup lights

Christie Roadster and Christie Mirage models (equipped with a 2.0kW, 2.4kW or 3kW lamp) include 'convenience lights' that allow for easy set up in dark environments.

### Bulb replacement

Reduce your cost of ownership by replacing only the bulb - not the entire lamp module assembly (for models equipped with a 2.0kW, 2.4kW or 3.0kW lamp).



▲ Easy-to-use lamp insertion mechanism



▲ Setup lights



▲ Fog filter

▶ CT lens mount

## Legacy compatibility

<b>Lenses</b>	The ILS™ lens adapter kit enables you to convert your existing CT <sup>1</sup> lenses to function with Christie J Series projectors. The conversion kit includes complete instructions and allows you to make the change in the field. Christie J Series models can be shipped with a CT <sup>1</sup> lens mount option (must be specified at time of purchase) to allow you to continue using existing CT lenses.
<b>Lamps</b>	Legacy Xenon lamp modules are compatible with the Christie J Series projectors. The new lamp modules for the Christie J Series with lamp memory cards, contain a serial number and hours of use information to make inventory and usage tracking quick and easy in all Christie J Series projectors. Lamp hour tracking capabilities are not enabled in legacy models.
<b>Input cards</b>	The input cards <sup>2</sup> used in Christie M Series projectors are also compatible with Christie J Series models.
<b>Rigging and stacking</b>	Customers with existing stacking mounts and hardware can use the same equipment with the Christie J Series models.

### Fog filter options

To help extend the life of your projector and protect your investment, optional fog juice filters are available for environments that require more than the protection of our dust-sealed engine.

The design of the fog juice filter kits - attached to the projector - reduces the affects of the oil or juice created by fog, smoke, hazers and pyrotechnics. These kits include easy-to-install external media mounts and one set of filters (internal and external). The life of the filters depends on the amount of bi-product captured, but they typically can last up to 20 hours.

### Serviceability and support

All Christie 3-chip DLP projectors ship standard with a three-year warranty on parts and labor (including light engine).

### Environmental commitment

We recognize our responsibility to control the impact our business activities, products and services have on the environment. We're fully committed to finding and using environmentally friendly solutions, and to meeting or exceeding applicable laws, regulations and organizational objectives. You'll notice that the Christie J Series includes features that support our commitment to being eco-friendly.

As an industry leader, we are committed to the prevention of pollution and continual improvement through implementation of our ISO14001 registered environmental management system.

#### Efficiency

The lamps used in Christie J Series projectors produce the highest lumens per watt, enabling brighter images

without additional power requirements. As well, liquid cooling with the thermal-feedback system in the Christie Roadster and Christie Mirage models (equipped with a 2.0kW, 2.4kW or 3.0kW lamp), improves performance and enables the projectors to run cooler in harsh environments, using less power to keep the DMDs cool. DLP projectors offer higher brightness from smaller units and consequently use less power to achieve the same levels of brightness.

#### Auto shut-off and eco mode

Reduce your cost of ownership by reducing power consumption and extending lamp life when the projector isn't being used. These projectors can run in eco mode, which reduces brightness and therefore reduces your power requirements and extends the life of your lamp. A reduction in the projector's

thermal output minimizes energy use and possible air-conditioning needs.

#### Low power standby modes

Standby power consumption (phantom power draw) is less than 30W.

#### Bare bulb replacement

You can replace lamps instead of the entire lamp module assembly, reducing unnecessary waste and extra shipping requirements.

#### Bulb replacement

In Christie Roadster and Christie Mirage models (equipped with a 2.0kW, 2.4kW or 3kW lamp) you can replace bulbs instead of the entire lamp module assembly, reducing unnecessary waste and extra shipping requirements.




<sup>1</sup>CT refers to the suite of lenses available for use with Christie's legacy Xenon platform. Note: ILS capabilities are not available with CT lenses and lens mount.

<sup>2</sup>Legacy input cards are not compatible with Christie J Series models.

# Expanded lens suite

This full suite of fixed, short zoom and long zoom lenses for SXGA+, HD and WUXGA resolutions, provides the broadest range of lenses in this marketplace.

Lenses	Part number
ILS Lens 0.73:1 SX+/0.67:1 HD	118-100110-XX
ILS Lens 1.2:1 SX+/1.1:1 HD	118-100117-XX
ILS Lens 1.25-1.6:1 SX+/1.16-1.49:1 HD	118-100111-XX
ILS Lens 1.5-2.0:1 SX+/1.4-1.8:1 HD	118-100112-XX
ILS Lens 2.0-2.8:1 SX+/1.8-2.6:1 HD	118-100113-XX
ILS Lens 2.8-4.5:1 SX+/2.6-4.1:1 HD	118-100114-XX
ILS Lens 4.5-7.5:1 SX+/4.1-6.9:1 HD	118-100115-XX
ILS Lens 7.5-11.2:1 SX+/6.9-10.4:1 HD	118-100116-XX

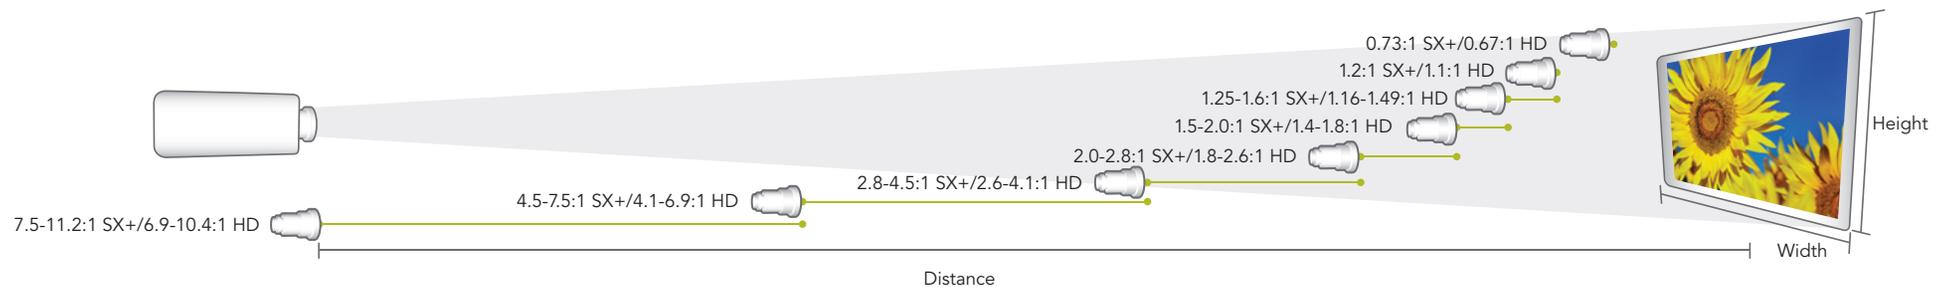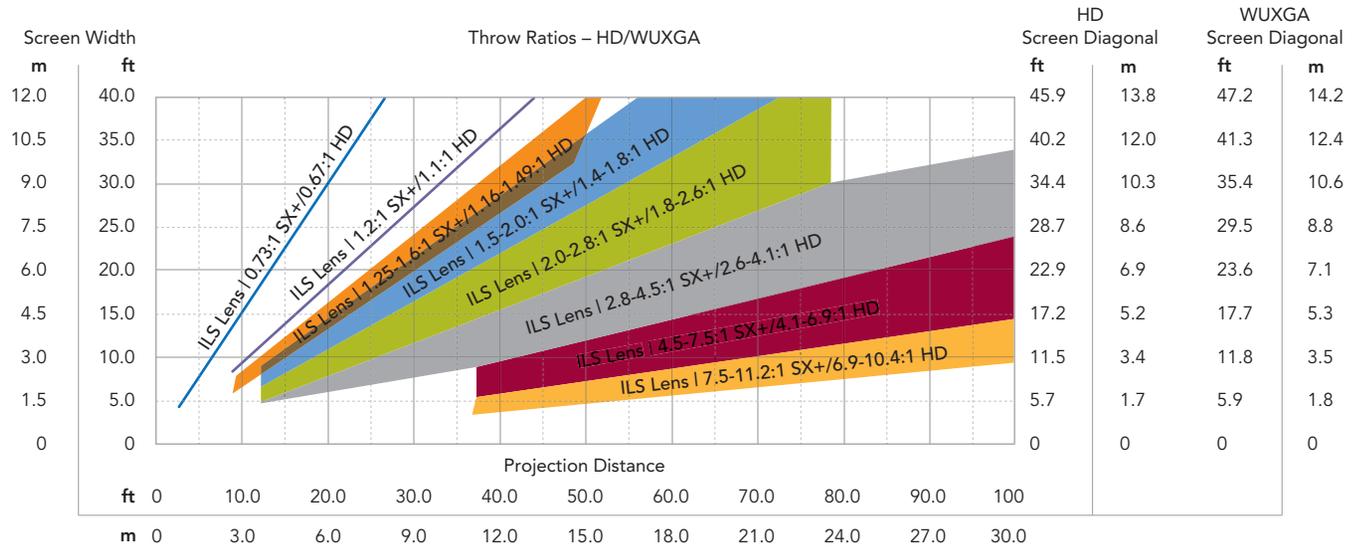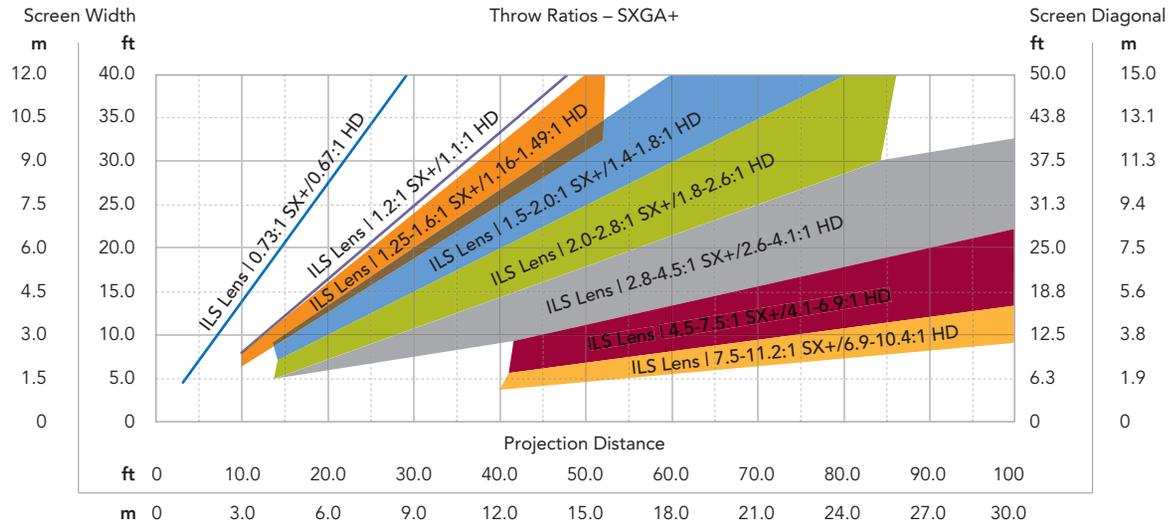

Throw distance values are subject to a +/- 5% lens tolerance.



▲ Analog input card

▲ DMX512 interface card

▲ Dual link DVI input card

▲ Dual 3G SD/HD-SDI input card

▲ Video decoder input card

▲ Twin HDMI input card

	Description	Part number
Lamps	1.0kW Cermox Xenon pre-aligned lamp module	003-120117-XX
	1.2kW Cermox Xenon pre-aligned lamp module	003-120116-XX
	2.0kW Xenon bubble lamp module	003-120135-XX
	2.0kW Xenon lamp bare bulb kit	03-000887-XX
	2.4kW Xenon bubble lamp module	03-900518-XX
	2.4kW Xenon lamp bare bulb kit	03-000883-XX
	3.0kW Xenon bubble lamp module	003-000306-XX
	3.0kW Xenon lamp bare bulb kit	003-000305-XX
	Bulb alignment tool	38-804900-XX
	Input cards	Analog input
Dual link DVI input		108-312101-XX
Video decoder input		108-310101-XX
Dual 3G SD/HD-SDI input		108-313101-XX
Twin HDMI input		108-311101-XX
DMX512 interface		108-314101-XX
Other	ILS lens adapter kit	108-331108-XX
	Portrait display adapter	118-116109-XX
	Fog juice filters	132-114107-XX
	Ceiling mount <sup>1</sup>	104-100001-XX
	Ceiling mount	104-104001-XX
	Ceiling mount extension	104-101001-XX
	Stacking kit	104-117101-XX
	Edge blending kit	104-102101-XX
	Remote IR sensor	104-106101-XX

## Input cards

Each projector is equipped with four input card slots to ensure flexibility and compatibility with a variety of signals. The input cards used in Christie® J Series projectors are also compatible with the Christie M Series models.

### Analog input card

The Analog input card accepts an analog video signal input over a 5 BNC connector interface. It can accept RGBH&V signals over 5 connectors, as well as component YPbPr signals on the RGB inputs.

### DMX512 interface card

This interface card supports the DMX512 communication standard through two 5-pin XLR connectors.

### Dual link DVI input card

The Dual link DVI input card has a 15-pin VGA connector for analog signals and a DVI-I connector which can support a single or dual link DVI HDCP video signal. This input card can also support 2D and 3D signals up to 330 MHz.

### Dual 3G SD/HD-SDI input card

The Dual 3G SD/HD-SDI input card accepts both standard-definition (SD) and high-definition (HD) serial-digital-interface (SDI) signals, and enables you to connect two of either types of signal. Both single-link HD and dual-link HD signals are accepted. This card also has two 3G SD/HD-SDI outputs to enable “loop-through” for its respective input.

### Video decoder input card

The Video decoder input card accepts various types of standard definition (SD) video, including CVBS (composite video), S-video, and component. It accepts NTSC 3.58, NTSC 4.4, PAL, PAL-N, PAL-M or SECAM formats. This card has two mini-DIN connectors (for S-video signals) and four BNC connectors that can be grouped to allow combinations of CVBS, S-Video, YPrPb or RGB video sources.

### Twin HDMI input card

The Twin HDMI™ input card accepts two HDMI inputs and provides 12-bit deep color handling on the input. It also supports the HDMIv1.4a format required for 3D systems providing the projector is upgraded with 3D capabilities. Additionally, advanced loop-through allows any input on any input card to be looped through to the two HDMI outputs on the card.

This functionality ensures that when stacking systems with any input (DVI, RGBHV or HDMI), the Twin HDMI card can be used to send the signal to a second projector. This stacked system is also a passive loop-through providing the repeater projector has AC power, even when powered off, the signal will continue to be looped out to the second projector.

<sup>1</sup>For models equipped with a 1.0kW or 1.2kW lamp

		DS+10K-J	Roadster S+22K-J	Roadster HD14K-J	Roadster HD16K-J	Roadster HD20K-J
<b>Image</b>	brightness	• 8500 ANSI lumens (9350 center lumens)	• 20,000 ANSI lumens (22,000 center lumens)	• 12,000 ANSI lumens (13,200 center lumens)	• 14,000 ANSI lumens (15,400 center lumens)	• 18,000 ANSI lumens (20,000 center lumens)
	contrast	• 1600-2000:1 full field   650:1 ANSI				
	uniformity	• 90% brightness uniformity			• 80% brightness uniformity	
<b>Display technology</b>	type	• 3-chip 0.95" DMD				
	native resolution	• SXGA+ (1400 x 1050)		• HD (1920 x 1080)		
<b>Lamp</b>	type	• 1.2kW Cermax Xenon pre-aligned lamp module	• 3.0kW Xenon bubble lamp module	• 2.0kW Xenon bubble lamp module	• 2.4kW Xenon bubble lamp module	• 3.0kW Xenon bubble lamp module
	estimated life	• 1500 hrs	• 750 hrs	• 1000 hrs	• 750 hrs	• 750 hrs
<b>Input</b>	standard	• Analog • Dual link DVI • Analog • Dual link DVI • Dual 3G SD/HD-SDI • Video Decoder				
	optional	• Analog • Dual link DVI • Dual 3G SD/HD-SDI • Video Decoder • Twin HDMI				
	signals	• HDTV formats VGA through to QXGA (2048 x 1536) • Accepts all current HDTV/DTV formats • Multi-standard video decoder • Horizontal and vertical scaling, all inputs				
	pixel clock	• 165 MHz (330 MHz high bandwidth mode)				
	scan rates	• Horizontal: 15-120kHz • Vertical: 23.97-150Hz				
<b>Control and networking</b>		• RS232 in/out • RS422 in • Ethernet (10/100) • USB Device • GPIO (RS232 9 Pin male connector) • Built-in backlit LCD keypad • Remote control (with optional wired XLR connection)				
<b>Lenses</b>	fixed	• ILS Lens 0.73:1 SX+/0.67:1 HD* • ILS Lens 1.2:1 SX+/1.1:1 HD				
	zoom	• ILS Lens 1.25-1.6:1 SX+/1.16-1.49:1 HD** • ILS Lens 1.5-2.0:1 SX+/1.4-1.8:1 HD • ILS Lens 2.0-2.8:1 SX+/1.8-2.6:1 HD • ILS Lens 2.8-4.5:1 SX+/2.6-4.1:1 HD • ILS Lens 4.5-7.5:1 SX+/4.1-6.9:1 HD • ILS Lens 7.5-11.2:1 SX+/6.9-10.4:1 HD				
	offsets	• ±100% Vertical • ±50% Horizontal • (* ±23%V ± 13%H) • (** ±70%V ±45%H)			• ±120% Vertical • ±54% Horizontal • (* ±35%V ±12%H) • (** ±102%V ±40%H)	
<b>Accessories</b>	standard	• IR remote • Line cord				
	optional	• Analog input card • Dual link DVI input card • Video decoder input card • Dual 3G SD/HD-SDI input card • Twin HDMI input card • DMX512 interface card ILS lens adapter kit • Portrait display adapter (1.0kW and 2.0kW models only) • CT lens mount <sup>1</sup> • Yellow notch filter <sup>1</sup> • Fog juice filters (Roadster models only) • Ceiling mount • Ceiling mount extension • Stacking kit (1.0kW and 1.2kW models only) • Edge-blending kit • Remote IR sensor • Bulb alignment tool • Christie AutoStack (optional curve module available) • 3D upgrade kits <sup>2</sup>				
<b>Enhanced feature sets</b>		• Embedded Christie Twist • Embedded image tiling • Intelligent Lens System (ILS) • 3D upgradable <sup>2</sup> • Advanced block artifact reduction • ChristieNET Web interface • User-friendly, intuitive LCD keypad • User-replaceable lamps <sup>2</sup> • Advanced loop-through twin HDMI card • Lamp memory module • Advanced, 10-bit processing • Automatic shut-off and ECO mode • Dust-sealed light engine • SNMP (simple network management protocol) • DHCP (dynamic host configuration protocol) • 24/7 operation • Hybrid stack • Compatibility with existing accessories • Liquid cooling <sup>2</sup> • Setup lights <sup>2</sup> • Built-in portrait capabilities <sup>2</sup>				
<b>Power requirements (Dual lamp mode)</b>	operating voltage	• 200-240 VAC @ 50/60Hz	• 200-240 VAC @ 50/60Hz			
	maximum operating current	• 10A @ 200V	• 20A @ 200V	• 14A @ 200V	• 16A @ 200V	• 20A @ 200V
	power	• 2000W	• 4000W	• 2800W	• 3200W	• 4000W
	dissipation	• 6830 BTU/hr	• 13,650 BTU/hr	• 9560 BTU/hr	• 10,925 BTU/hr	• 13,650 BTU/hr
<b>Dimensions</b>	size	• (LxWxH): 22.3 x 26.0 x 12.9" (566 x 660 x 328mm)	• (LxWxH): 32.0 x 24.5 x 16.5" (815 x 621 x 419mm)			
	shipping size	• (LxWxH): 33.5 x 30.0 x 26.0" (851 x 762 x 660mm)	• (LxWxH): 41.0 x 32.5 x 29.5" (1041 x 825 x 749mm)			
	weight	• 88lbs (40kg) (without lens)	• 160lbs (72.5kg) (without lens)			
	shipping weight	• 125lbs (57kg)	• 200lbs (91kg)			
<b>Operating environment</b>		• Temperature: 40-104°F (5-40°C) • Humidity: 20-80% non-condensing				
<b>Regulatory approvals</b>		• Regulatory Approvals/Markings: Directives (EC) 2011/65/EU (RoHS); 2012/19/EU (WEEE); Regulation (EC) No. 1907/2006 (REACH) • CAN/CSA C22.2 No. 60950-1 • UL 60950-1 • IEC 60950-1 • FCC, Part 15, Subpart B, Class A • EN55022/CISPR22 Class A • EN55024 / CISPR24 • Certifications marks (check with CDS for latest update): cULus (Canada & US), CE (EU), CCC (China), GoST-R (Russia), KC (Korea), PSE (Japan), C-Tick (Australia & New Zealand), South Africa				
<b>Limited warranty</b>		• Three years parts and labor (including light engine)				

<sup>1</sup> Factory installed at time of purchase.

<sup>2</sup> Does not apply to DS+10K-J.

<sup>3</sup> Dimensions A, B and C are based on the lens being used.

Roadster WU20K-J


- 18,000 ANSI lumens  
(20,000 center lumens)

- 3-chip 0.96" DMD
- WU (1920 x 1200)
- 3.0kW Xenon  
bubble lamp module
- 750 hrs


- ±112% Vertical • ±54% Horizontal
- (\* ±22%V ±6%H) • (\*\* ±82%V ±38%H)

- 20A @ 200V
- 4000W
- 13,650 BTU/hr


Front view

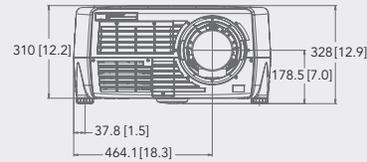


Side view<sup>3</sup>

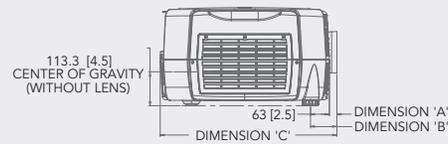

Top view

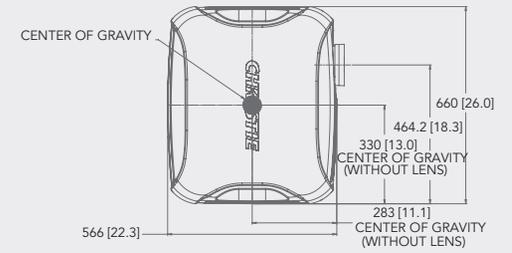

Underneath view

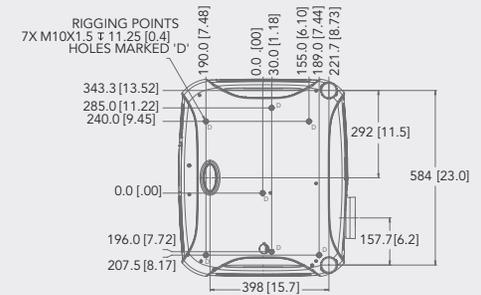

		Mirage WU7K-J	Mirage S+22K-J	Mirage HD14K-J	Mirage HD16K-J	Mirage HD20K-J
Image	brightness	• 6200 ANSI lumens (6850 center lumens) @ 220V • 4650 ANSI lumens (5100 center lumens) @ 110V	• 20,000 ANSI lumens (22,000 center lumens)	• 12,000 ANSI lumens (13,200 center lumens)	• 14,000 ANSI lumens (15,400 center lumens)	• 18,000 ANSI lumens (20,000 center lumens)
	contrast	• 1600-2000:1 full field   650:1 ANSI				
	uniformity	• 80% brightness uniformity	• 90% brightness uniformity	• 80% brightness uniformity		
Display technology	type	• 3-chip 0.96" DMD	• 0.95" DMD			
	native resolution	• WUXGA (1920 x 1200)	• SXGA+ (1400 x 1050)		• HD (1920 x 1080)	
	frame delay	• As low as one frame				
Lamp	type	• 1.0kW Cermax Xenon pre-aligned lamp module	• 3.0kW Xenon bubble lamp module	• 2.0kW Xenon bubble lamp module	• 2.4kW Xenon bubble lamp module	• 3.0kW Xenon bubble lamp module
	estimated life	• 1500 hrs	• 750 hrs	• 1000 hrs	• 750 hrs	• 750 hrs
Input	standard	• Slot 1-2 populated, standard: two Dual Link DVI-D (330 MHz) input cards (each has VGA (165 MHz) for 3D or dual input 3D compatibility) with HDMI 1.3 receiver Slot 3-4 unpopulated				
	optional	• Analog • Dual link DVI • Dual 3G SD/HD-SDI • Video decoder • Twin HDMI				
	signals	• HDTV formats VGA through to QWXGA (2560 x 1600) • Accepts all current 2D HDTV/DTV formats (optional input cards may be required) • HDMI 1.3 receiver supports mandatory HDMI 1.4a 3D modes of operation plus 24-144Hz triple flash 3D mode • Multi-standard video decoder • Horizontal and vertical scaling, all inputs				
	pixel clock	• 330 MHz				
	scan rates	• Horizontal: 15-120kHz • Vertical: 23.97-150Hz (frame lock maximum 120Hz) • 48-60Hz frame doubled or dual input 3D • 48Hz (24Hz per eye) frame triple flash • 96-120Hz frame rate up to 1920 x 1200 • 24-144Hz triple flash 3D				
Control and networking		• RS232 in/out • RS422 in • Ethernet (10/100) • USB Device • GPIO (RS232 9 Pin male connector) • Built-in backlit LCD keypad • Remote control (with optional wired XLR connection)				
Optical system		• Dust-sealed 3-chip DMD light engine • Motorized horizontal and vertical lens offset • Scheimpflug/Boresite (tilt) adjustment • Built-in light shutter • Tool-free lens insertion system				
Lenses	fixed	• ILS Lens 0.73:1 SX+ / 0.67:1 HD* • ILS Lens 1.2:1 SX+ / 1.1:1 HD				
	zoom	• ILS Lens 1.25-1.6:1 SX+ / 1.16-1.49:1 HD** • ILS Lens 1.5-2.0:1 SX+ / 1.4-1.8:1 HD		• ILS Lens 2.0-2.8:1 SX+ / 1.8-2.6:1 HD • ILS Lens 2.8-4.5:1 SX+ / 2.6-4.1:1 HD		
	offsets	• ±112% Vertical • ±54% Horizontal • (* ±22%V ±6%H) • (** ±82%V ±38%H)	• ±100% Vertical • ±50% Horizontal • (* ±23%V ±13%H) • (** ±70%V ±45%H)	• ±120% Vertical • ±54% Horizontal • (* ±35%V ±12%H) • (** ±102%V ±40%H)		
Accessories	standard	• IR remote • Line cord				
	optional	• ILS lens adapter kit • CT lens mount <sup>1</sup> • Yellow notch filter <sup>1</sup> • 3D glasses (active and passive) • 3D active emitter • 3D passive modulator • Fog juice filters <sup>2</sup> • DMX512 interface card • Analog input card • Dual link DVI input card • Dual 3G SD/HD-SDI input card • Video decoder input card • Twin HDMI input card • Remote IR sensor • Bulb alignment tool <sup>2</sup> • Bare bulb kit <sup>2</sup> • Ceiling mount • Ceiling mount extension • Stacking kit <sup>3</sup>				
Enhanced feature sets		• Embedded Christie Twist • Embedded image tiling • Intelligent Lens System (ILS) • Advanced block artifact reduction • ChristieNET web interface • User-friendly, intuitive LCD keypad • Advanced loop-through Twin HDMI card • Lamp memory module • User replaceable bulbs (2.0kW, 2.4kW and 3.0kW only) • Advanced 10-bit processing • Automatic shut-off and ECO mode • Dust-sealed light engine • SNMP (simple network management protocol) • DHCP (dynamic host configuration protocol) • Liquid cooling ( 2.0kW, 2.4kW, 3.0kW models only) • Setup lights (2.0kW, 2.4kW, 3.0kW models only) • Hybrid stack • Compatibility with legacy accessories				
Power requirements (Dual lamp mode)	operating voltage	• 100-240 VAC @ 50/60Hz		• 200-240 VAC @ 50/60Hz		
	maximum operating current	• 12A @ 100-120V • 8A @ 200-240V		• 20A @ 200V	• 14A @ 200V	• 16A @ 200V
	power	• 1600W		• 4000W	• 2800W	• 3200W
	dissipation	• 5460 BTU/hr		• 13,650 BTU/hr	• 9560 BTU/hr	• 10,925 BTU/hr
Dimensions	size	• (LxWxH): 22.3 x 26.0 x 12.9" (566 x 660 x 328mm)		• (LxWxH): 32.0 x 24.5 x 16.5" (815 x 621 x 419mm)		
	shipping size	• (LxWxH): 33.5 x 30.0 x 26.0" (851 x 762 x 660mm)		• (LxWxH): 41.0 x 32.5 x 29.5" (1041 x 825 x 749mm)		
	weight	• 88lbs (40kg) (without lens)		• 160lbs (72.5kg) (without lens)		
	shipping weight	• 125lbs (57kg)		• 200lbs (91kg)		
Operating environment		• Temperature: 40-104°F (5-40°C) • Humidity: 20-80% non-condensing				
Regulatory approvals		• Regulatory Approvals/Markings: Directives (EC) 2011/65/EU (RoHS); 2012/19/EU (WEEE); Regulation (EC) No. 1907/2006 (REACH) • CAN/CSA C22.2 No. 60950-1 • UL 60950-1 • IEC 60950-1 • FCC, Part 15, Subpart B, Class A • EN55022/CISPR22 Class A • EN55024 / CISPR24 • Certifications marks (check with CDS for latest update): cULus (Canada & US), CE (EU), CCC (China), GoS-TR (Russia), KC (Korea), PSE (Japan), C-Tick (Australia & New Zealand), South Africa				
Limited warranty		• Three years parts and labor (including light engine)				

<sup>1</sup> Factory installed at time of purchase.

<sup>2</sup> Does not apply to Mirage WU7K-J.

<sup>3</sup> Only applies to Mirage WU7K-J.

<sup>4</sup> Dimensions A, B and C are based on the lens being used.

<b>Mirage WU14K-J</b>	<b>Mirage WU20K-J</b>
<ul style="list-style-type: none"> <li>• 12,000 ANSI lumens (13,200 center lumens)</li> </ul>	<ul style="list-style-type: none"> <li>• 18,000 ANSI lumens (20,000 center lumens)</li> </ul>


<ul style="list-style-type: none"> <li>• 3-chip 0.96" DMD</li> <li>• WUXGA (1920 x 1200)</li> </ul>	
---	--

<ul style="list-style-type: none"> <li>• 2.0kW Xenon bubble lamp module</li> <li>• 1000 hrs</li> </ul>	<ul style="list-style-type: none"> <li>• 3.0kW Xenon bubble lamp module</li> <li>• 750 hrs</li> </ul>
--	---


<ul style="list-style-type: none"> <li>• ±112% Vertical • ±54% Horizontal</li> <li>• (* ±22%V ±6%H) • (** ±82%V ±38%H)</li> </ul>	
---	--

<ul style="list-style-type: none"> <li>• 14A @ 200V</li> <li>• 2800W</li> <li>• 9560 BTU/hr</li> </ul>	<ul style="list-style-type: none"> <li>• 20A @ 200V</li> <li>• 4000W</li> <li>• 13,650 BTU/hr</li> </ul>
--	--


**Front view**

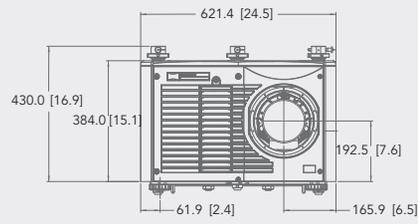


**Side view<sup>4</sup>**

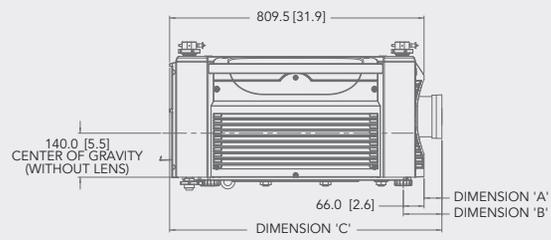

**Top view**

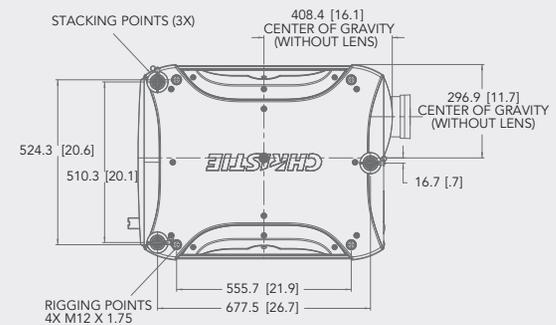

**Underneath view**

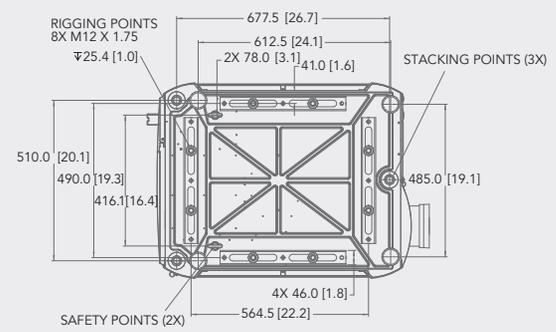

---

**United Kingdom**

Branch & EMEA  
Head Office  
ViewPoint  
200 Ashville Way  
Wokingham  
Berkshire, U.K.  
RG41 2PL  
PH: +44 (0) 118 977 8000

**Middle East**

Light Industrial Unit (LIU-17)  
Nad Al Shibba  
Sheikh Mohammed Bin Zayed Road  
Dubai Silicon Oasis  
PO Box: 293762  
Dubai - U.A.E  
PH: +971 (0) 4 503 6800

**Africa**

Unit C3  
Northlands Deco Park  
New Market Road  
Northriding  
Randburg  
2164  
Johannesburg  
Gauteng  
South Africa  
PH: +27 71 335 8667

---

**Other EMEA offices****Germany**

Branch Office  
PH: +49 2161 566 200

**France**

Branch Office  
PH: +33 (0) 1 41 21 44 04

**Eastern Europe**

Representative Office  
PH: +36 (0)1 47 48 138

**Spain**

Branch Office  
PH: +34 91 633 9990

**Italy**

Independent Sales Consultant Office  
PH: +39 (0) 2 9902 1161

**Russia**

Independent Sales Consultant Office  
PH: +7 (495) 930-8961



ISO 9001  
ISO 14001

Kitchener, Ontario



For the most current specification information, please visit [www.christieemea.com](http://www.christieemea.com)

 Copyright 2016 Christie Digital Systems USA, Inc. All rights reserved. All brand names and product names are trademarks, registered trademarks or tradenames of their respective holders. Christie Digital Systems Canada Inc.'s management system is registered to ISO 9001 and ISO 14001. Performance specifications are typical. Due to constant research, specifications are subject to change without notice. Printed in Canada on recycled paper. 3674 Oct 13

**CHRISTIE®**