

Christie Vive Audio S Series S215 cinema subwoofer



Technical Specifications	Christie S215
System type	• Subwoofer, ported enclosure, with EBS (Extended Bass Shelf) tuning
Driver components	• 2 x 15" low frequency drivers each with dual 4" voice coils and long linear excursion
Crossover	<ul style="list-style-type: none"> • External active electronic crossover/filter • High pass: Butterworth 24dB/octave @ 25Hz • For screen channel or corner surround - Low pass: Bessel 24dB/octave @ 209Hz • For surround bass management - Low pass: L-R 24dB/octave @ 80Hz
Frequency response¹	• 27-300Hz @ -10dB • 30-250Hz @ -6dB
Maximum SPL^{2,3}	• 131dB SPL continuous • 143dB SPL peak
Sensitivity¹, 1W/1m	• 100dB (40-150Hz)
Power handling^{2,3}	• 1200W (AES) continuous • 2400W (IEC) short term
Recommended amplifier power	• 830-1500W (FTC) @ 4 ohms
Rated impedance	• 4 ohms
Input connectors	• Screw terminal barrier strip
Enclosure	<ul style="list-style-type: none"> • 18mm marine plywood • High cubic displacement • Heavily cross-braced, for minimal enclosure resonance • Ported and tuned to 27Hz with EBS (Extended Bass Shelf) • Built-in fly points
Mounting	<ul style="list-style-type: none"> • Secured to floor or platform using BKS-SUB Security bracket • Includes a total of 16 x M10 fly points for total versatility • 1 x Allen Products RK-4C Rigging Kit 4 x Cables (111-685201-01) for flying⁴
Accessories (optional)	• Christie BKS-SUB Security bracket (145-110103-01)
Dimensions	• (LxWxH) 20.0 x 30.2 x 39.0" (508 x 768 x 990mm)
Net weight	• 124lbs (56kg)
Warranty	• Limited 5-year warranty


¹ Measured at 2m, ground plane conditions.

² AES refers to AES2-2012 standard. Pink noise with 6dB crest factor at 1m. Max continuous SPL calculated based on sensitivity and AES power handling.


³ IEC refers to IEC 60268-5 standard. IEC pink noise with 9dB peak factor. Maximum peak SPL calculated using peak voltage during IEC short-term power test.

⁴ 4 cables required when flown. See User Manual for details.


Front view




Bottom view



Top view

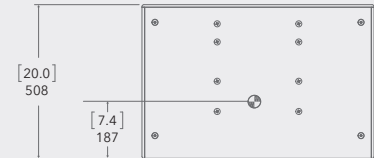

Back view

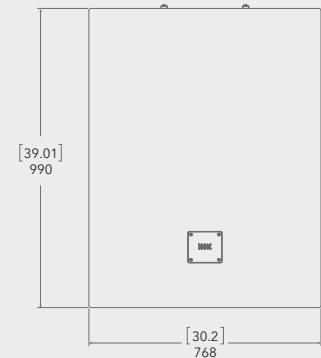

United Kingdom
Branch & EMEA
Head Office
ViewPoint
200 Ashville Way
Wokingham
Berkshire, U.K.
RG41 2PL
PH: +44 (0) 118 977 8000

Middle East
Light Industrial Unit (LIU-17)
Nad Al Shibba
Sheikh Mohammed Bin Zayed Road
Dubai Silicon Oasis
PO Box: 293762
Dubai - U.A.E
PH: +971 (0) 4 503 6800

Africa
Unit C3
Northlands Deco Park
New Market Road
Northriding
Randburg
2164
Johannesburg
Gauteng
South Africa
PH: +27 71 335 8667

Other EMEA offices

Germany
Branch Office
PH: +49 2161 566 200

France
Branch Office
PH: +33 (0) 1 41 21 44 04

Eastern Europe
Representative Office
PH: +36 (0)1 47 48 138

Spain
Branch Office
PH: +34 91 633 9990

Italy
Independent Sales Consultant Office
PH: +39 (0) 2 9902 1161

Russia
Independent Sales Consultant Office
PH: +7 (495) 930-8961



For the most current specification information, please visit www.christieemea.com